

Staff Report

Community Development Department

Historic Review

Dawson's Conoco Station Remodel

file no. HRV-22-051

To: Historic Resources Board
From: Ben Chmiel, AICP, Long-Range Planner
Meeting Date: June 27, 2022
Applicant/Owner: Aaron Dyck, BBN Architects / Phyllis Pease
Property Location: 1026 Poyntz Avenue
Historic Property: Dawson's Conoco Station (circa 1967)



1026 Poyntz Ave.

Dawson's Conoco Location



Site Location

0 50 100 200
Feet



BACKGROUND

Dawson's Conoco Service Station was listed on the National Register of Historic Places in 2021 for its association with road-side commerce and mid-century architecture. It was the site of a former Conoco Gas Station (1925). Continental Oil Company purchased an adjacent lot in 1965, demolished the original station, and built the existing service station

in 1966-67. The plan is Type 09A- MAS Service Station Building of the Continental Oil Company, Marketing Department, Houston Texas, dated October 13, 1963, with details and revisions through 1966. These plans clearly reflect the original design found in a building permit, filed with the city in 1966.



Figure 1: Aerial of Site, 2020

The station is a simple rectangular form comprised of two sections of varied height; the rear garage being taller than the storefront. The front salesroom, facing Poyntz Avenue, was an aluminum-framed glass storefront with single doors on the west and south sides. Customer restrooms were accessed from outside, on the east side of the salesroom. The garage/service area is a concrete block structure with steel I-beams supporting the overhead doors at the three garage bays. Although utilitarian in design and function, the garage/service area had abundant natural light. The three garage doors were predominantly glass with an aluminum lower pane, and three skylights were located across the east side of the shop above the workbenches. The salesroom had a heightened level of finish with painted concrete block in a stacked bond pattern and vinyl tile flooring. The station design

is characterized by the large canopies soaring out from the west and south sides of the salesroom upward toward the streets beyond. Arc pole lights stretched toward the canopies from the NW and SE corners of the site, and strip lighting around the canopies and building enhanced this simple horizontal Modern design. The building retains a very high degree of integrity with original features, including the extant canopies and arc lights. See enclosed nomination form for additional details.

Source: National Register of Historic Places Nomination Form OMB No. 1024-0018



Figure 2: Station as viewed from 11th & Poyntz, Photo 7, NRHP Nomination Form OMB No. 1024-0018

PROPOSAL

Generally, the applicant is proposing a complete remodel of the property in order to repurpose it as a neighborhood restaurant/bar. Of note, this project underwent a preliminary review with the HRB at their December 16, 2019 meeting, at which there were no major concerns posed by Board members (minutes enclosed).



Figure 3: Rendering of proposed viewed from 11th & Poyntz, BBN Architects.

The building is 1,800 sq ft. The south portion of the building was originally the gas station lobby with a service counter and areas to display auto related goods. The new design programs this space as a lobby for the restaurant and will have areas to display local food related goods. The north, high bay portion of the building was originally the auto service area. The new design programs this space for dining and kitchen food preparation.

The existing grounds are programmed for restaurant related activities. The site areas west and south of the existing structure will have paved spaces for tables and chairs in addition to landscaped areas for lawn games and entertainment. The areas north and east of the existing structure will be paved for patron parking.

The project also includes a new 500 sq ft addition to the east for support spaces including new, accessible restrooms, storage and mechanical rooms, and a washroom for the kitchen. See enclosed plans for additional detail.

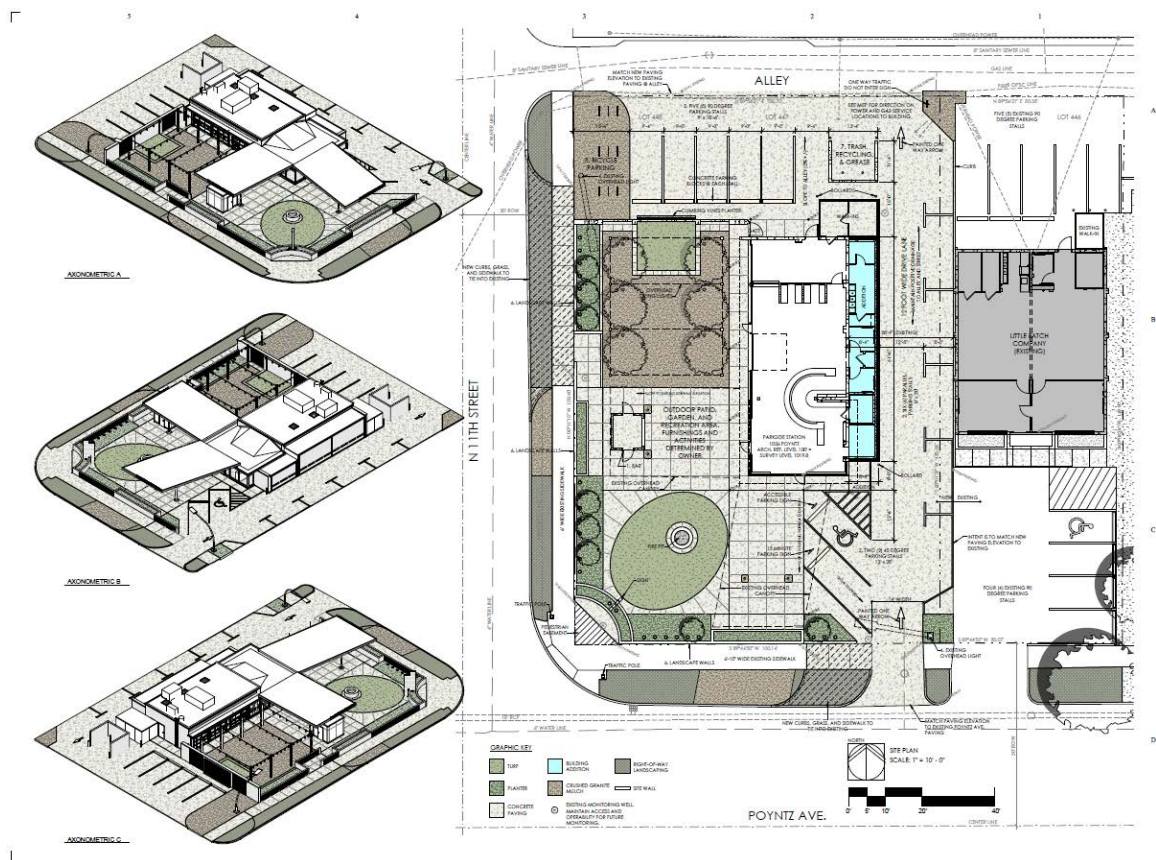


Figure 4: Site Plan of Proposed, BBN Architects.

ANALYSIS

Relationship to the Secretary of The Interior's Standards for the Treatment of Historic Properties:

1. A property will be used as it was historically or be given a new use that requires minimal change to its distinctive materials, features, spaces, and spatial relationships.

Historically, the property was used as a fueling station, which offered some mechanical services. The new use is a restaurant/bar which is quite different. However, the restaurant use as proposed does not necessitate drastic modification to its distinctive materials (metal), features (canopies and façade details), and spatial relationships. Any other use allowed by zoning would almost certainly require incompatible changes (see elaboration)

2. The historic character of a property will be retained and preserved. The removal of distinctive materials or alteration of features, spaces, and spatial relationships that

characterize a property will be avoided.

Interior modifications are negligible. The addition on the back of the building will be visually distinguished and could be removed in the future. The most significant modification to the property is to the site. Historically, the site surrounding the building was used for essentially a parking lot, service lanes, and other areas for maneuvering cars. With the introduction of new landscaping and hardscaping, the auto-oriented site ceases to exist. However, this Standard should be balanced with Standard 10, in that being detached from the building and more temporary by nature. New outdoor features work harmoniously with the new use, such as utilizing canopies as seating areas.

- 3. Each property will be recognized as a physical record of its time, place, and use. Changes that create a false sense of historical development, such as adding conjectural features or elements from other historic properties, will not be undertaken.**

There is no change creating a false sense of historical development.

- 4. Changes to a property that have acquired historic significance in their own right will be retained and preserved.**

There are no known changes to the property since the original construction in 1967 that would need to be retained.

- 5. Distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize a property will be preserved.**

The paving material around the building will be removed and some interior features, including some dividing walls will be removed these materials and features are not particularly distinctive.

- 6. Deteriorated historic features will be repaired rather than replaced. Where the severity of deterioration requires replacement of a distinctive feature, the new feature will match the old in design, color, texture, and, where possible, materials. Replacement of missing features will be substantiated by documentary and physical evidence.**

The overhead rolling doors on the north end of the building are deteriorated and not very efficient. They will be replaced with permanent window systems with insulated clear glass and small profile aluminum frames and mullions in keeping with the original layout, color, and texture. The southern-most garage bay door is in similar condition and will be replaced in kind. Windows throughout will be replaced in kind.

- 7. Chemical and physical treatments, if appropriate, will be undertaken using the gentlest means possible. Treatments that cause damage to historic materials will not be used.**

There are no proposed physical or chemical treatments. Overall, the structure will be repainted.

- 8. Archeological resources will be protected and preserved in place. If such resources must be disturbed, mitigation measures will be undertaken.**

There are no documented archeological resources at the site. Given the site location and characteristics it is unlikely any archeological resources exist. However, if they are discovered during construction, the State Historic Preservation Office must be contacted immediately for further instruction.

- 9. New additions, exterior alterations, or related new construction will not destroy historic materials, features, and spatial relationships that characterize the property. The new work will be differentiated from the old and will be compatible with the historic materials, features, size, scale and proportion, and massing to protect the integrity of the property and its environment.**

The new addition on the back of the building is not on a primary façade and is smaller in scale than the part of the building it is attaching to and will be constructed out of concrete masonry units, matching the existing material.

- 10. New additions and adjacent or related new construction will be undertaken in such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired.**

Practically, all new additions and construction could be removed without effecting the essential form and integrity of the property. This is especially true of the landscaping and hardscaping surrounding the building.

RECOMENDATION

City Administration finds the proposal meets the Secretary of the Interior Standards for the Treatment of Historic Property as reviewed in accordance with K.S.A. 75-2724 and will not damage or destroy any historically significant property or historic character-defining features and recommends approval of the building permit associated with the work at 1026 Poyntz Avenue.

Elaboration: This project is a unique adaptive reuse project, which is transforming from a quintessential auto-oriented use to a pedestrian-oriented use. Changes to zoning in the area threatened the continued existence of the structure, as gas/car service stations and general retail have not been permitted along Poyntz for decades. This project takes on this unique challenge to preserve the building while giving it a viable use, the only of which may be this unique concept of a highly stylized restaurant/bar. It would not make for a good office, housing, etc. In order for this use to work, adaptive use of the grounds is essential. Though slightly compromised, it can easily be reversed in the future, should its use as a service station become possible again in the future, as unlikely as this is.

POSSIBLE MOTIONS

Approval/Denial made in the affirmative:

The Board finds the proposal meets the Secretary of the Interior's Standards for the Treatment of Historic Property as reviewed in accordance with K.S.A. 75-2724 and will not damage or destroy any historically significant property or historic character-defining features.

Conditional Approval:

The Board finds the proposal meets the Secretary of the Interior's Standards for Rehabilitation as reviewed in accordance with K.S.A. 75-2724 and will not damage or destroy any historically significant property or historic character-defining features, with the condition(s) that... _____.

Table

Table the item and give further direction.

ENCLOSURES

1. Application
2. Project Plans
3. Site Photos/Renderings
4. National Register of Historic Places Form
5. December 19, 2019 meeting minutes

Form Name:	Historic Resources Major Review Application
Submission Time:	June 7, 2022 4:59 pm
Browser:	Chrome 102.0.0.0 / Windows
IP Address:	216.147.237.101
Unique ID:	973492907
Location:	39.2458, -96.6336

Property Information

Historic Property Address	1026 Poyntz Ave. Manhattan, KS 66502
Historic District	Downtown
Historic Property Name (if known)	Dawson's Conoco Service Station

Applicant Information

Name	Aaron Dyck
Address	228 Poyntz Ave. Manhattan, KS 66502
Email	aaron@bbnarchitects.com
Phone	(785) 776-4912

Are you (the applicant) also the property owner? No

Property Owner Information

Name	Phyllis Pease
Address	1905 Leavenworth Manhattan, KS 66502
Email	phyllisjpease@hotmail.com
Phone	(785) 200-7838

Proposal Information

Permits/Action Requested (check all that apply).	Building Permit Sign Permit
--	--------------------------------

Please describe in detail the project you are proposing.

The attached multi-page pdf titled '22-0525 Parkside Bid Set' is the construction document set of drawings and depicts the project in full. In brief, this project consists of a remodel of the existing 1,800 sq ft building to become a restaurant/bar. The south portion of the building was originally the gas station lobby with a service counter and areas to display auto related goods. The new design programs this space as a lobby for the restaurant and will have areas to display local food related goods. The north, high bay portion of the building was originally the auto service area. The new design programs this space for dining and kitchen food preparation.

The existing grounds are programmed for restaurant related activities. The site areas west and south of the existing structure will have paved spaces for tables and chairs in addition to landscaped areas for lawn games and entertainment. The areas north and east of the existing structure will be paved for patron parking.

The project also includes a new 500 sq ft addition to the east for support spaces including new, accessible restrooms, storage and mechanical rooms, and a wash room for the kitchen.

The Owner is currently developing branding for the restaurant. We understand more information will be required as it relates to the sign permit.

The existing structure was originally a Conoco gas and auto service station. Prototype plans were submitted to the City of Manhattan in 1963; the permit was not issued till 1966. From as early as 1960-1968 the Polk Directory identifies the property as "Dawson's Conoco Service". In 1969 the directory identifies the property as "Carlson Conoco Service" which continues through 1976. In 1974 the directory also lists the property as "Nationwide Trailer Rental" in addition to "Hertz Truck Rental". The property was listed as vacant in 1977. In 1978 the property was occupied by Parkside Conoco & U-Haul Service. A sign permit from 1977 notes this transition in which the original 1966 sign is demolished. The property was vacant in 1995 and reoccupied in 1996 by "Dede's Conoco Service". In 2004 Davis Tire & Auto appears to have been established. By 2006 the gas service appeared to cease operation, being dropped from the directory at this location and solely listed as "Davis Tire & Auto". The gas pump islands were removed sometime between March 2014 and February 2016.

Photo Upload 1	https://www.formstack.com/admin/download/file/12860806561
Photo Upload 2	https://www.formstack.com/admin/download/file/12860806562
Photo Upload 3	https://www.formstack.com/admin/download/file/12860806563
Photo Upload 4	https://www.formstack.com/admin/download/file/12860806564

Photo Upload 5	https://www.formstack.com/admin/download/file/12860806565
Photo Upload 6	https://www.formstack.com/admin/download/file/12860806566
Photo Upload 7	https://www.formstack.com/admin/download/file/12860806567
Photo Upload 8	https://www.formstack.com/admin/download/file/12860806568
Photo Upload 9	https://www.formstack.com/admin/download/file/12860806569
Photo Upload 10	https://www.formstack.com/admin/download/file/12860806570
Photo Upload 11	https://www.formstack.com/admin/download/file/12860806571
Document Upload 1	https://www.formstack.com/admin/download/file/12860806572
Document Upload 2	https://www.formstack.com/admin/download/file/12860806573
Document Upload 3	https://www.formstack.com/admin/download/file/12860806574
Document Upload 4	https://www.formstack.com/admin/download/file/12860806575
Document Upload 5	https://www.formstack.com/admin/download/file/12860806576

Secretary of the Interior Standards

1. Will the property be used as it was historically or be given a new use that requires minimal change to its distinctive materials, features, spaces, and spatial relationships? Explain.

The property will be given a new use that requires minimal change to its distinctive materials, features, spaces, and spatial relationships.

The exterior of the original structure is being minimally altered aside from repairs where needed, new energy efficient windows, new lighting, and paint. Distinctive materials and features will remain.

The new addition is located to the east with the intent to minimize visual impact to the original structure.

2. How will the historic character of the property be retained and preserved? Will any distinctive materials be removed? Will features, spaces, and spatial relationships that characterize the property be altered? Explain.

Historic character of the property will be retained and preserved. The public facing elevations of the building will be minimally altered aside from those noted in question #1 above. The distinctive concrete block material will be maintained, repaired where needed, and painted. The old gas canopies will be maintained, repaired where needed, and painted. The old curved light fixtures at the northwest and southeast corners of the sight will be re-lamped and maintained.

The drawing set, in addition to the supplemental renderings included in this application convey the intent to retain and preserve the historic aesthetic character.

3. How will the property be recognized as a physical record of its time, place, and use? Will there be any changes that create a false sense of historical development, such as adding conjectural features or elements from other historic properties? Explain.	Intent is for the property to be recognized as a physical record of its time, place, and use. Maintaining the exterior appearance of the original structure is an important factor. The new windows have been designed to be in keeping with the original glass layout. Distinctive materials and features of the exterior will be maintained. New elements are intended to be in harmony with the existing structure without adding conjectural features or elements. For example the modest addition to the east uses similar concrete block as the exterior material and minimally impacts the public facing building elevations.
4. Are there past changes to the property that have acquired historic significance in their own right? How will they be retained and preserved?	The property has been minimally altered since the original construction in 1966.
5. Are there distinctive materials, features, finishes, and construction techniques or examples of craftsmanship that characterize the property? How will they be preserved?	Distinctive materials and features include concrete block masonry, large areas of glazing, and the old gas canopies. These are all being preserved and in the case of the windows replaced in kind. Distinctive construction techniques included a mix of running and stack bond concrete block masonry, structural steel window frames, and exposed interior concrete masonry as a wall finish and exposed steel beams in the high bay, auto repair portion of the building. These techniques will be preserved.
6. Will deteriorated historic features be repaired or replaced? Which features? Where the severity of deterioration requires replacement of a distinctive feature, will the new feature match the old in design, color, texture, and, where possible, materials? Does documentary and physical evidence exist to substantiate the replacement of missing features?	Historic features will be repaired in some places and replaced in others. For example the existing concrete block masonry is in generally good condition and needs mortar pointing in a few areas, especially on the southeast corner where the high bay meets the lower roof of the lobby. The gas canopies are in similarly good condition with minor repairs needed where the fascia is coming loose and separated from the internal structure. The existing windows are non-insulated, clear, single pane heavy storefront glass with small profile aluminum frames. To our knowledge they are original to the 1966 structure and in decent to marginal condition. The frames are loose in many areas and overall the system minimally keeps out hot and cold weather. To help condition the space a small through-wall window unit was put in on the east side of the existing lobby sometime after the original construction. There are also overhead rolling glass doors in the high bay auto shop portion of the building. These overhead doors are in poor condition and minimally keep out hot and cold weather. This was not uncommon for it's use as an auto repair shop. New windows are proposed as shown in the construction document set; insulated clear glass and small profile aluminum frames and mullions in keeping with the original layout, color, and texture.

7. Will there be any chemical and physical treatments to historic materials? How will it be undertaken using the gentlest means possible? How will treatments that cause damage to historic materials be avoided?

Harsh chemical and physical treatments are not proposed to historic materials.

8. Are any archaeological resources involved? Will they be protected and preserved in place? How will mitigation measures be undertaken if such resources exist or are discovered and must be disturbed?

N/A

9. How will new additions, exterior alterations, or related new construction avoid the destruction of historic materials, features, and spatial relationships that characterize the property? How will the new work be differentiated from the old and be compatible with the historic materials, features, size, scale and proportion, and massing to protect the integrity of the property and its environment?

The new 500 sq ft addition is planned for the east side of the building and is intended to minimally impact the aesthetic character of the public elevations. The public facing sides of the building are the west and south. The addition has been planned to minimally impact the existing historic structure. It will maintain the original structure's integrity and the roof lines have been designed to sit below the existing roof. The exterior materials of the new addition will be compatible with the original structure utilizing a mix of running bond and stack bond concrete block masonry.

10. How will the new additions and adjacent or related new construction be undertaken in such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment would be unimpaired?

The addition and adjacent new construction is designed in such a manner that, if removed in the future, the essential form and integrity of the historic property and its environment will be unimpaired. The addition, while attached to the original structure, has its own structural system and could be removed in the future. The addition resides on the least visible side of the original building with the least distinguishable features.


Signature and Agreement

Sign and Awning Agreement


Agree

Signature

A handwritten signature in black ink, appearing to be "D. W. Smith", written over a horizontal line.

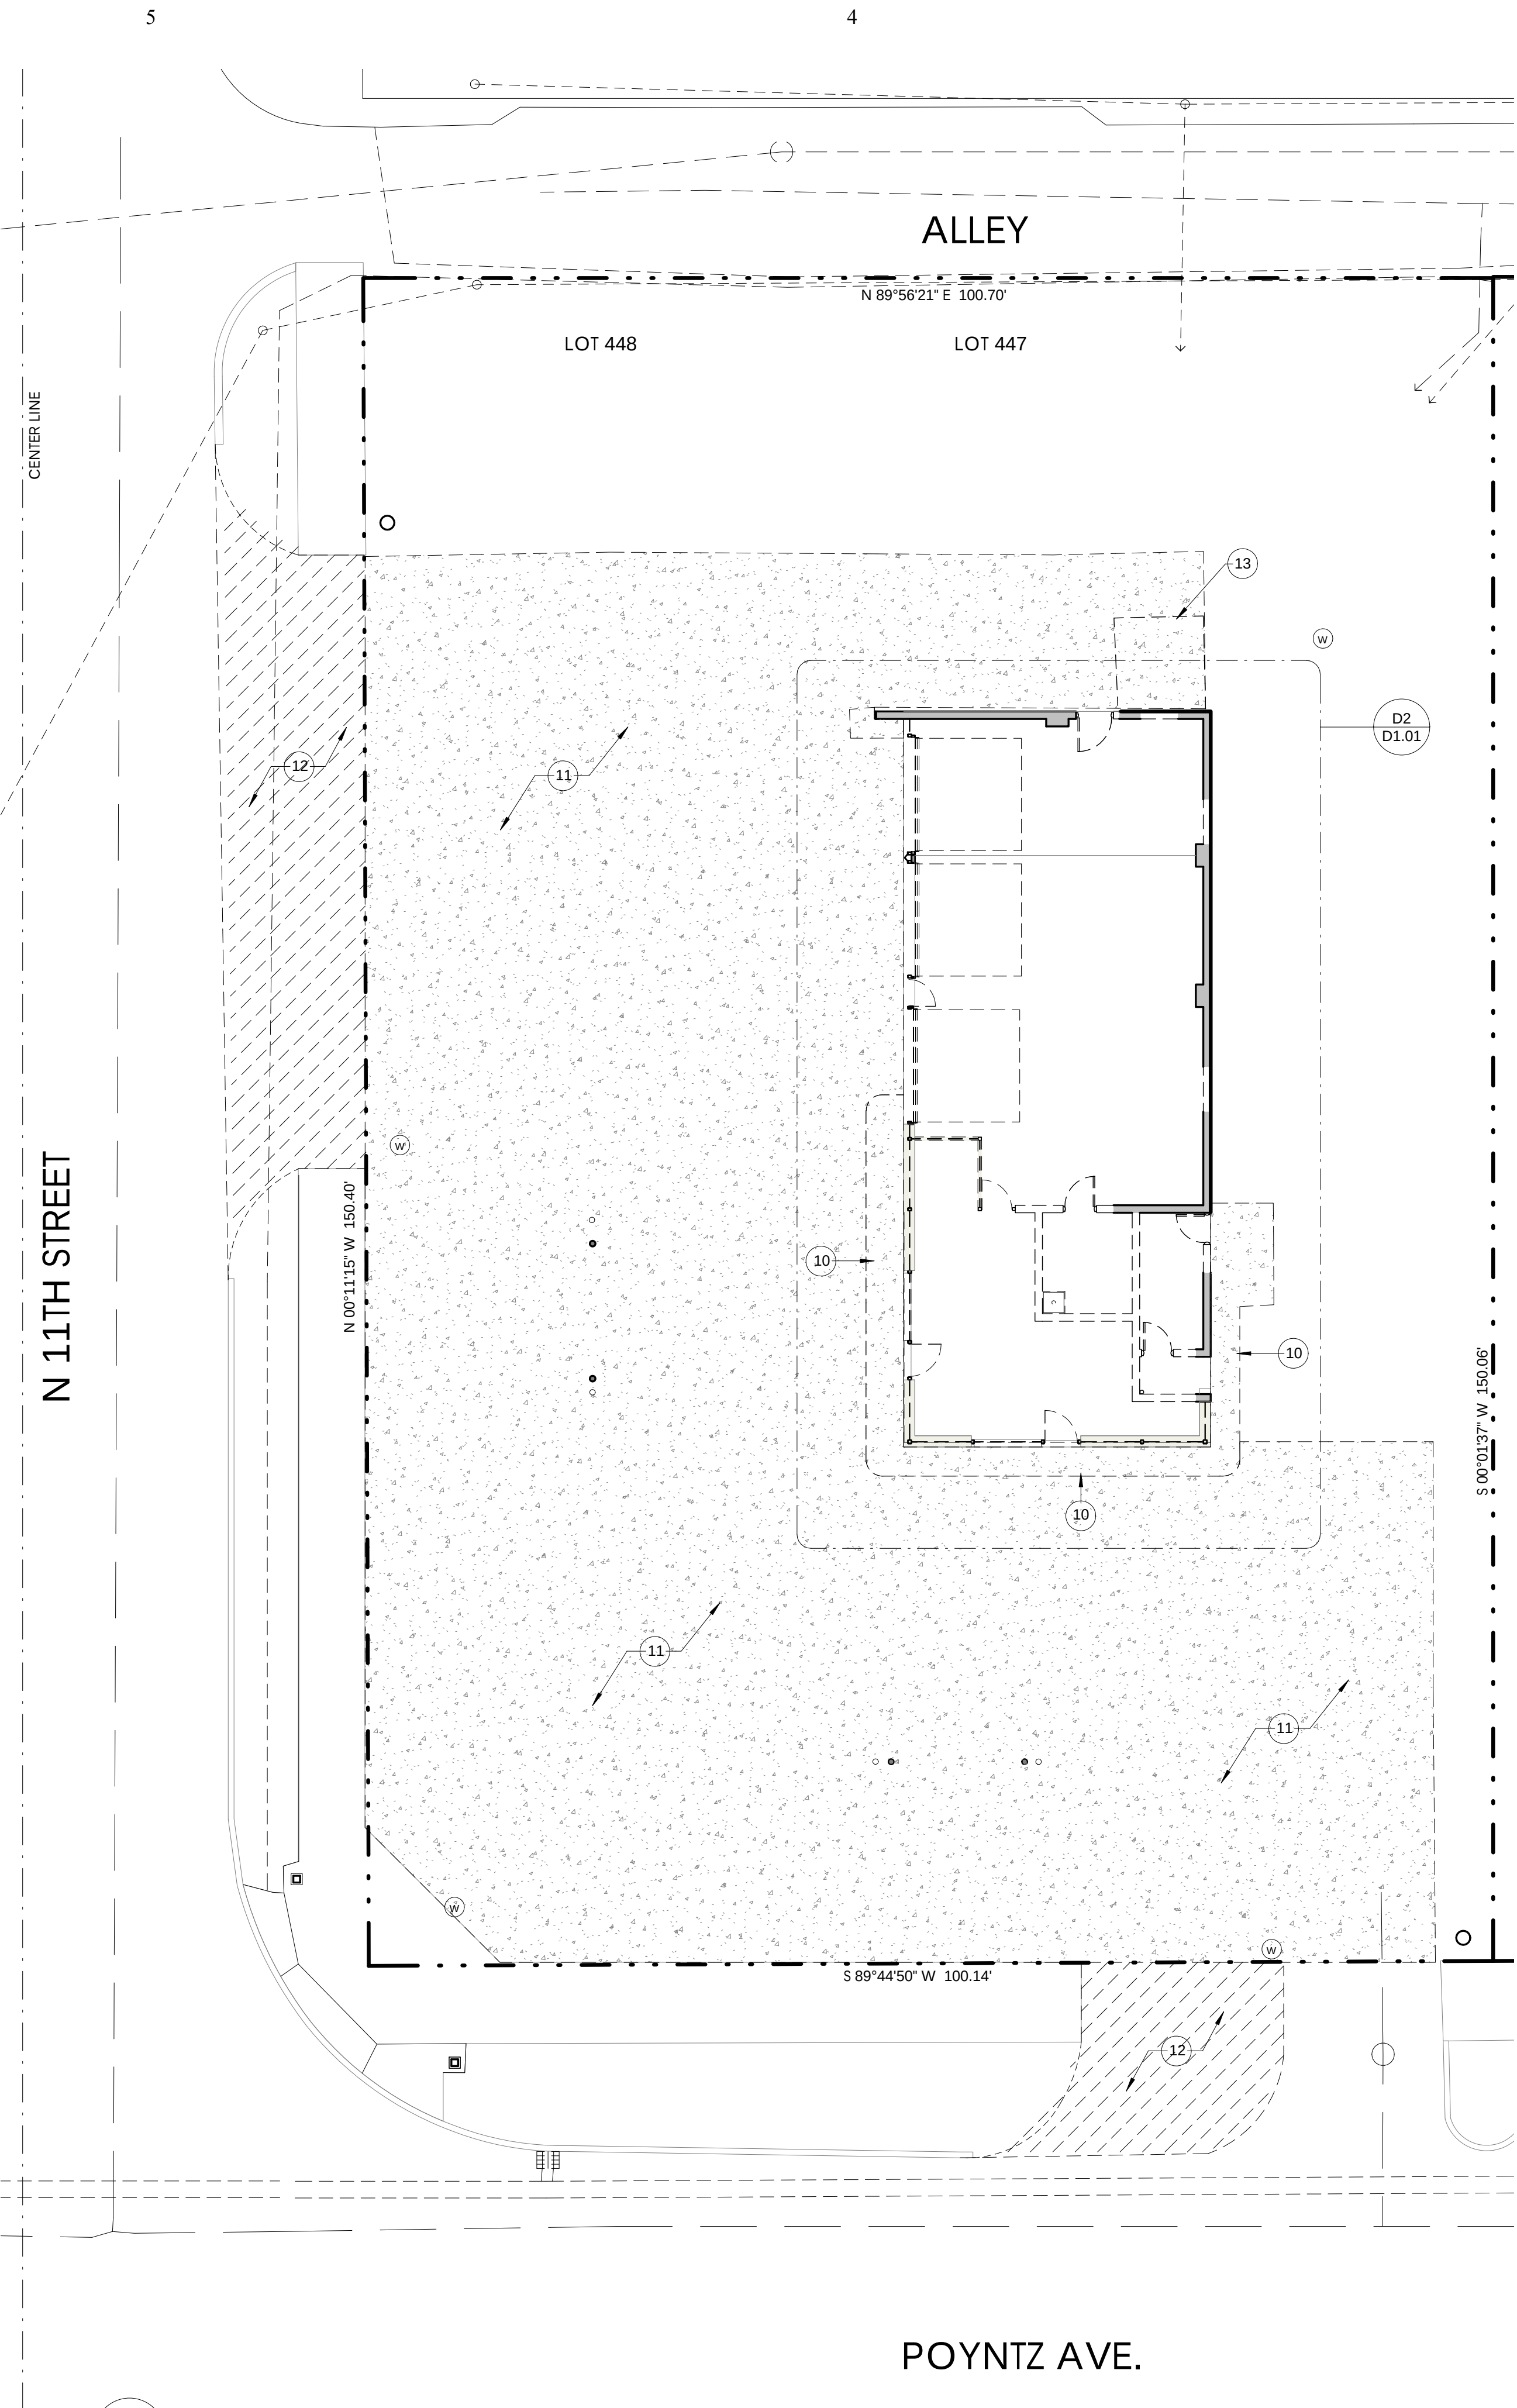

D4
D1.01 SITE DEMOLITION DIAGRAM
1" = 10'-0"

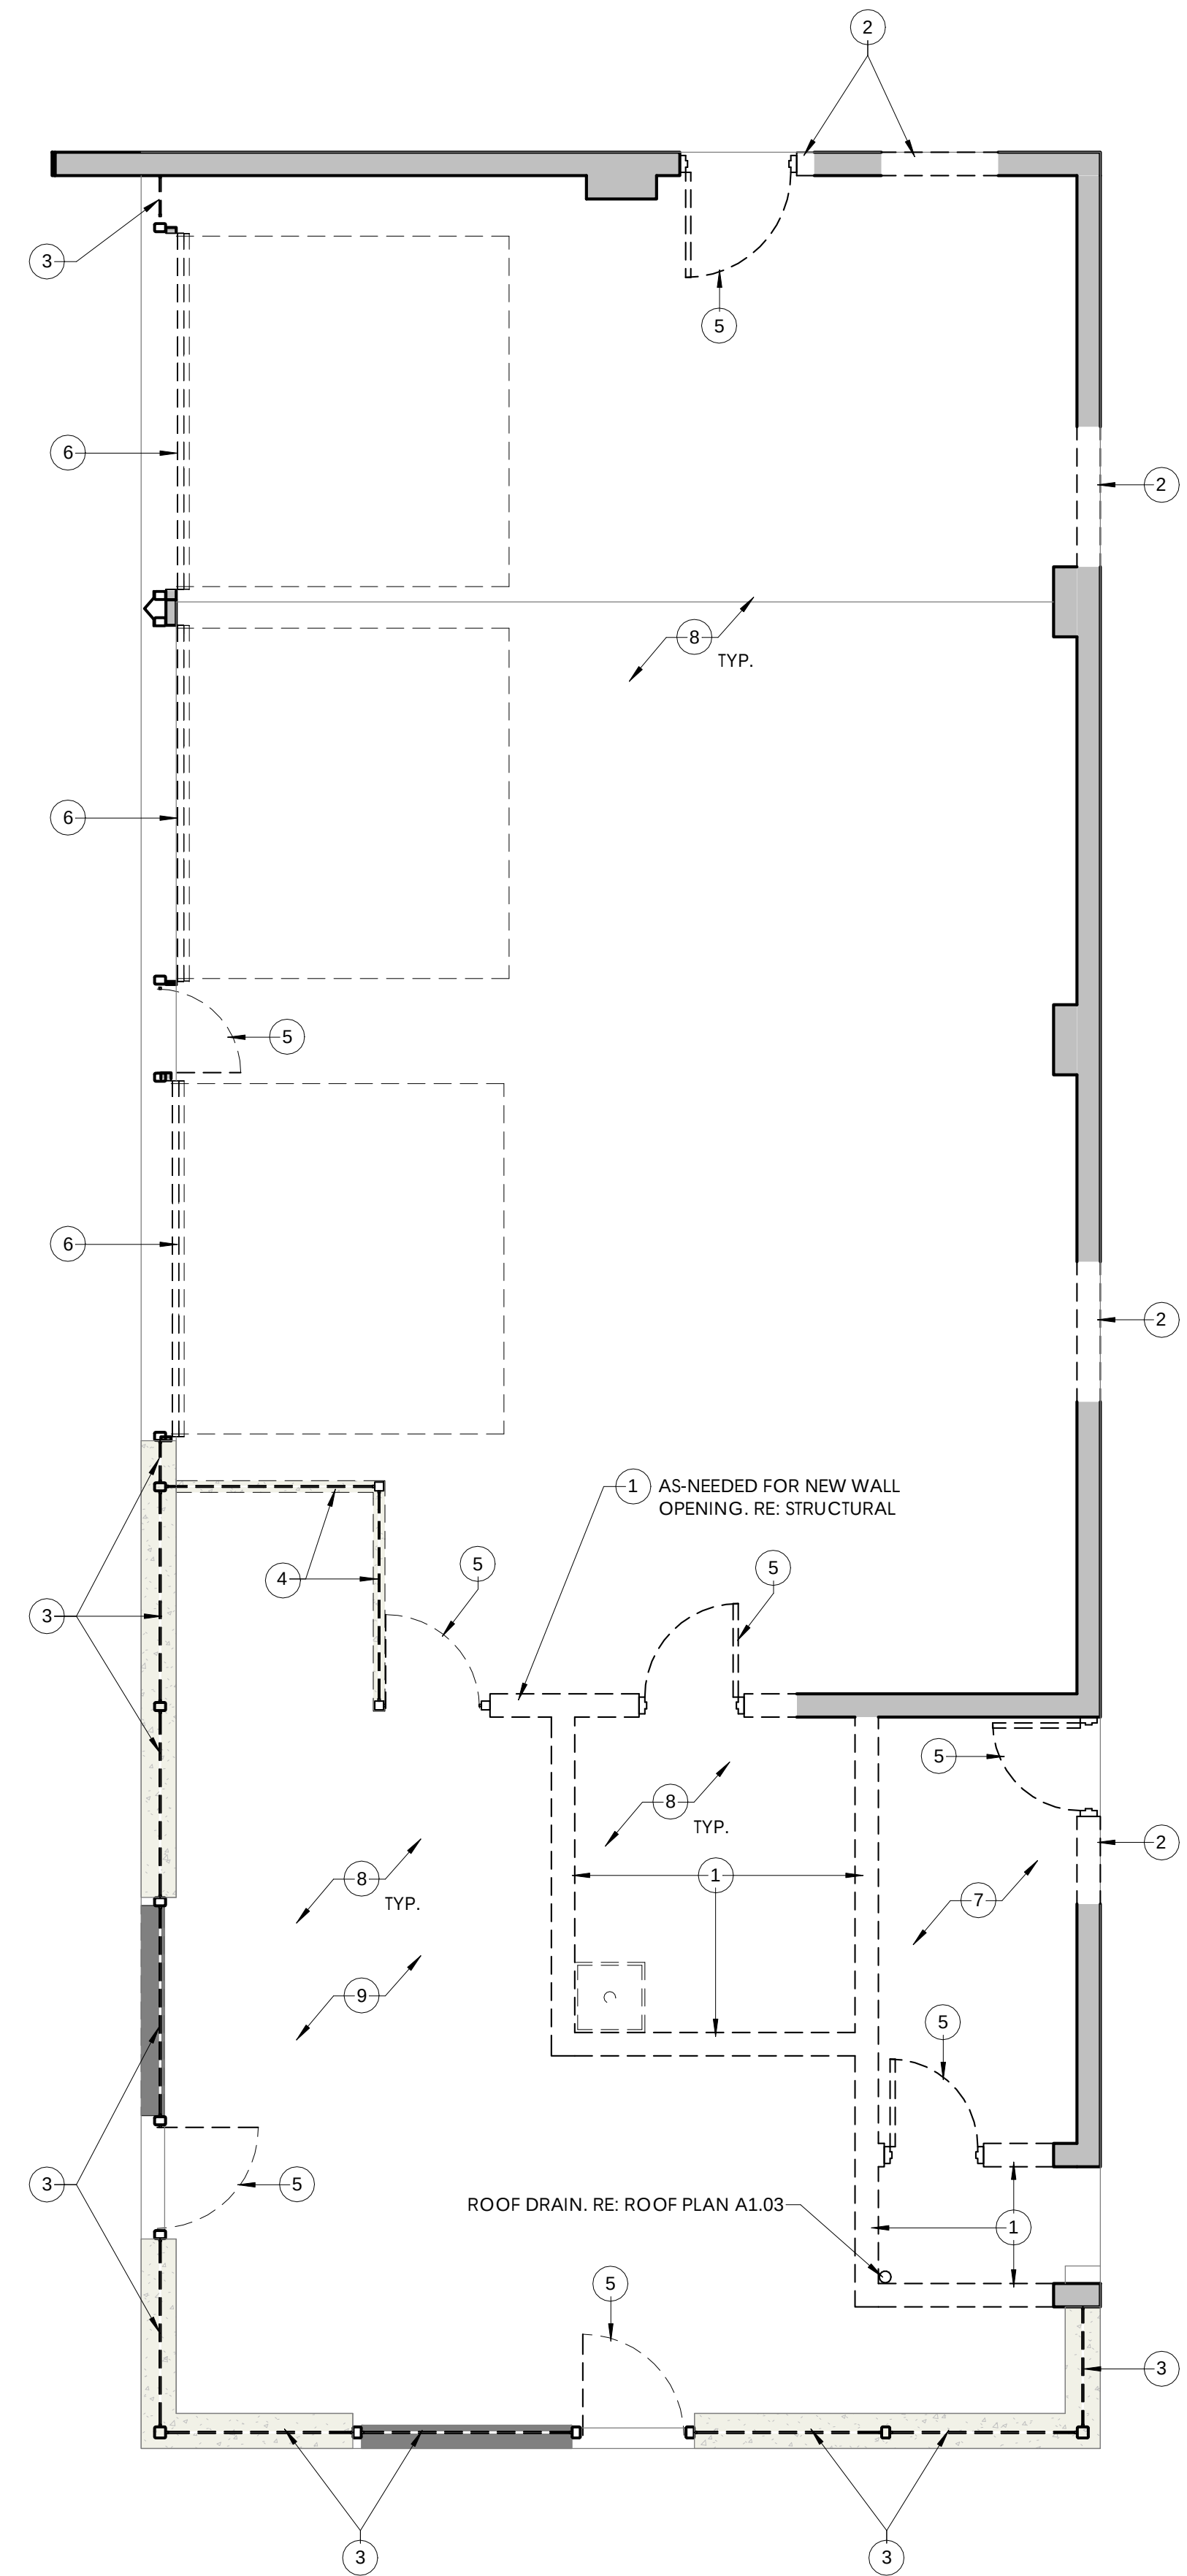

D2
D1.01 DEMOLITION PLAN
1/4" = 1'-0"

DEMOLITION KEYNOTES

DEMOLITION PLANS ARE PROVIDED AS A GUIDE TO DEMOLITION AND ARE NOT A COMPREHENSIVE REPRESENTATION OF THE SCOPE OF WORK NEEDED TO ACCOMMODATE NEW WORK. VERIFY QUESTIONS WITH OWNER AND ARCHITECT. THE FOLLOWING ITEMS ARE TO BE DEMOLISHED.

- EXISTING INTERIOR CMU WALLS.
A. REMOVE GYP CEILING IN FRONT LOBBY / MARKET AREA AND VERIFY ROOF FRAMING CONDITIONS WITH ARCHITECT AND STRUCTURAL ENGINEER PRIOR TO DEMOLISHING THE EXISTING CMU WALLS. STRUCTURAL CONDITIONS NEED TO BE VERIFIED BEFORE REMOVING ANY POTENTIAL LOAD BEARING WALLS.
- EXISTING EXTERIOR CMU WALLS AS NEEDED TO CREATE NEW OPENINGS.
- STOREFRONT WINDOWS AND WINDOW FRAMES. STEEL TUBE BUILDING STRUCTURE TO REMAIN.
- CONCRETE CURB, STEEL FRAMING, WINDOWS, AND CEILING STRUCTURE ASSOCIATED WITH THE EXISTING OFFICE SPACE WHICH BUMPS OUT INTO THE CAR BAY SPACE.
- SWING DOORS AND FRAMES
- OVERHEAD DOORS AND TRACK
- RESTROOM FIXTURES AND FINISHES.
A. THIS ROOM HAS BEEN LOCKED AND INACCESSIBLE. CONDITIONS UNKNOWN.
- ITEMS ASSOCIATED WITH THE PREVIOUS AUTO SHOP. EX: WALL SHELVING, RACKS, EQUIPMENT, ETC.
- VCT TILE
A. ASBESTOS TESTING HAS NOT BEEN PERFORMED TO OUR KNOWLEDGE. VERIFY WITH OWNER.
- SIDEWALK ADJACENT TO BUILDING.
- SITE CONCRETE.
- SITE ACCESS DRIVE.
- SITE SCREEN.

PATIO AND SITE AREA NOT SHOWN. SEE A100 SITE PLAN, AND A101 PATIO FOR

SEE MEP SHEETS FOR MECHANICAL, ELECTRICAL, AND PLUMBING DEMOLITION.

IT IS OUR UNDERSTANDING THAT THE OWNER WILL ORGANIZE REMOVAL OF THE AUTO LIFTS AND FLOOR PITS PRIOR TO DEMOLITION. IT IS UNKNOWN HOW MUCH FLOOR AREA WILL BE DISTURBED DURING THIS PROCESS. THE EXISTING CAR BAY FLOORS SLOPE TO THE EXISTING PITS. THE INTENT IS FOR NEW INTERIOR FLOOR FINISHES IS TO BE LEVEL AND FLUSH.

NOTIFY THE ARCHITECT & OWNER IF POTENTIALLY HAZARDOUS MATERIALS ARE ENCOUNTERED.

NOTIFY THE ARCHITECT IF DISCREPANCIES ARE FOUND BETWEEN THE EXISTING CONDITIONS AND DRAWINGS.

VERIFY IF THE OWNER WOULD LIKE TO RETAIN ANY MATERIALS SCHEDULED FOR DEMOLITION.

HISTORIC LISTING

THIS BUILDING IS ON THE NATIONAL REGISTER OF HISTORIC PLACES AND THE OWNER INTENDS TO PURSUE HISTORIC TAX CREDITS. EXISTING FEATURES THAT ARE FOUND TO BE DAMAGED CAN BE REPAIRED OR REPLACED IN-KIND. NOTIFY THE ARCHITECT AND HISTORIC PRESERVATION CONSULTANT OF EXISTING CONDITIONS FOUND DURING DEMOLITION AS NEEDED.



INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502



Sheet Title:

**DEMOLITION
PLANS**

Sheet:

D1.01

Of:

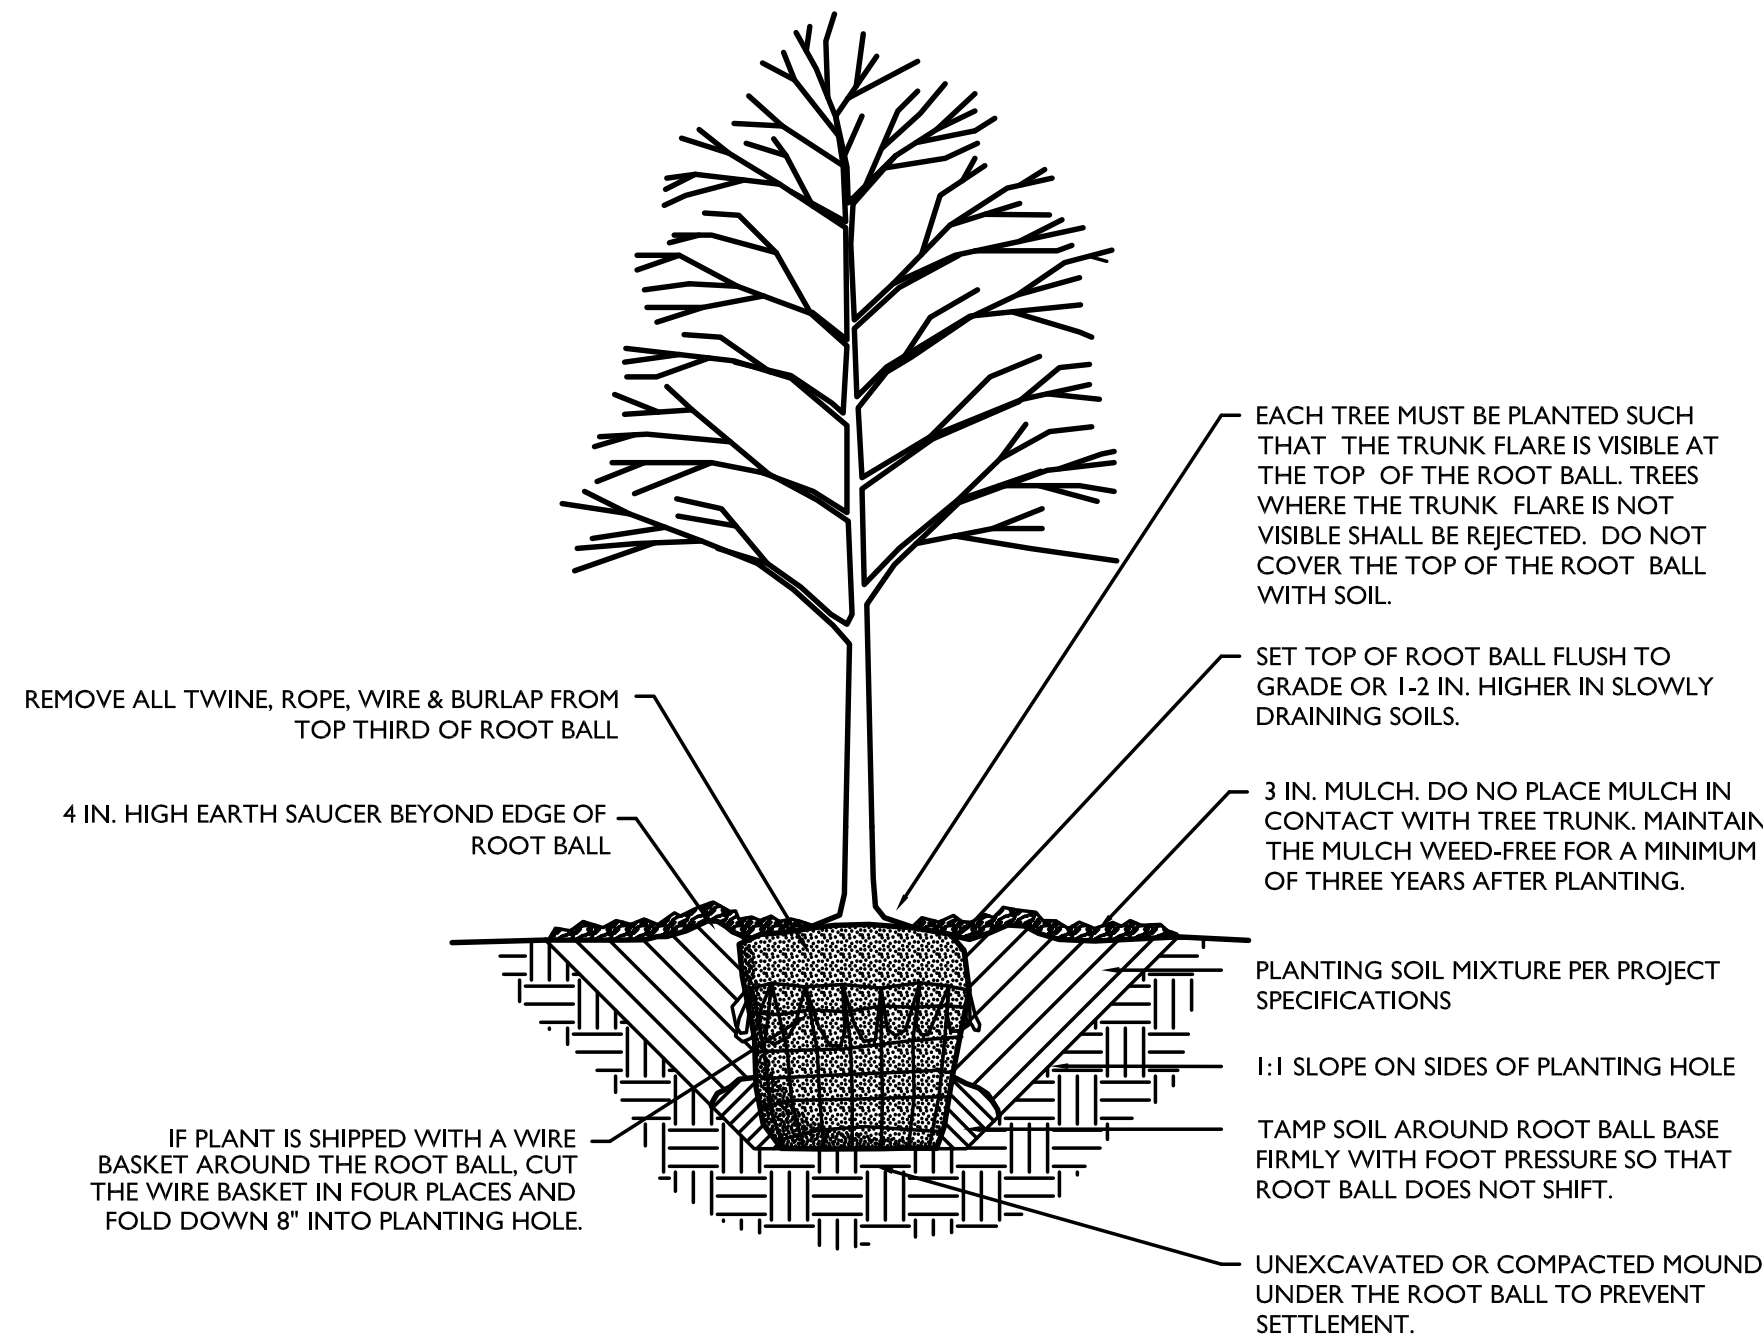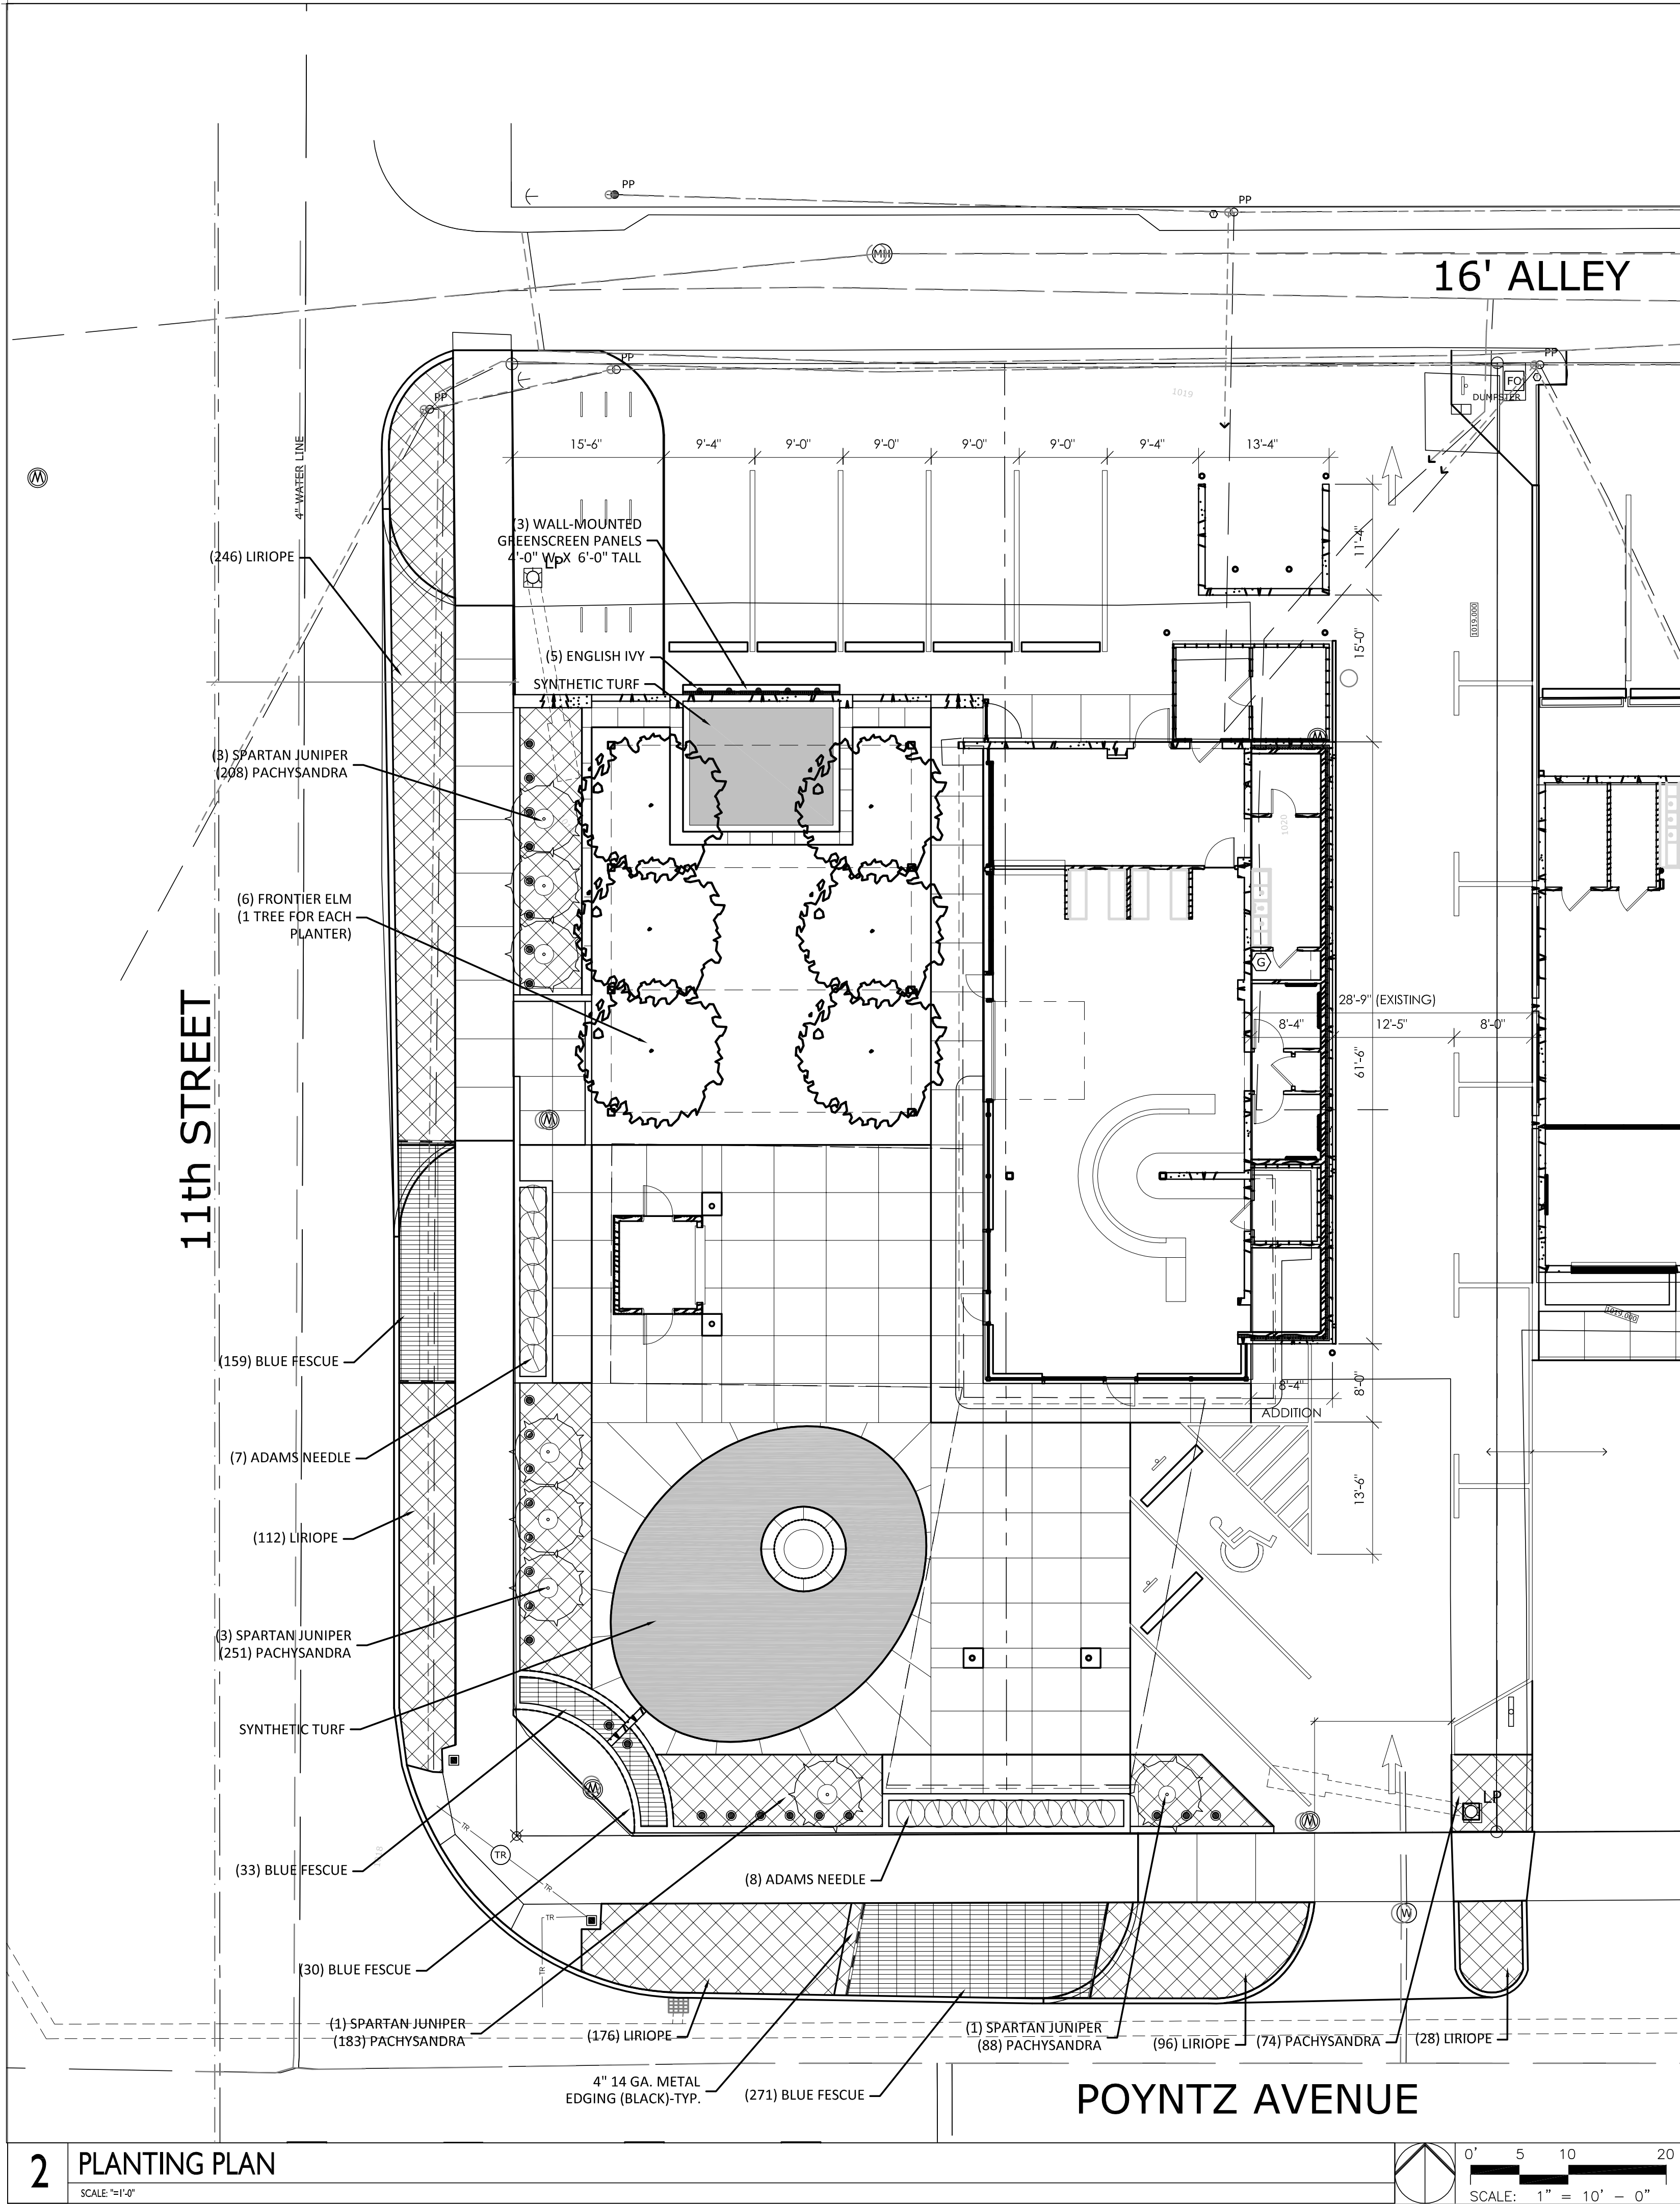

TREE PLANTING NOTES


DO NOT HEAVILY PRUNE THE TREE AT PLANTING. PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, AND BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED; HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN.

MARK THE NORTH SIDE OF THE TREE IN THE NURSERY, AND ROTATE TREE TO FACE NORTH AT THE SITE WHEN EVER POSSIBLE.

STAKE TREES PER TREE STAKING DETAIL. WRAP TREES PER TREE WRAP DETAIL.

MULCH RING 6 FT. DIAM.


5 TREE INSTALLATION
NOT TO SCALE

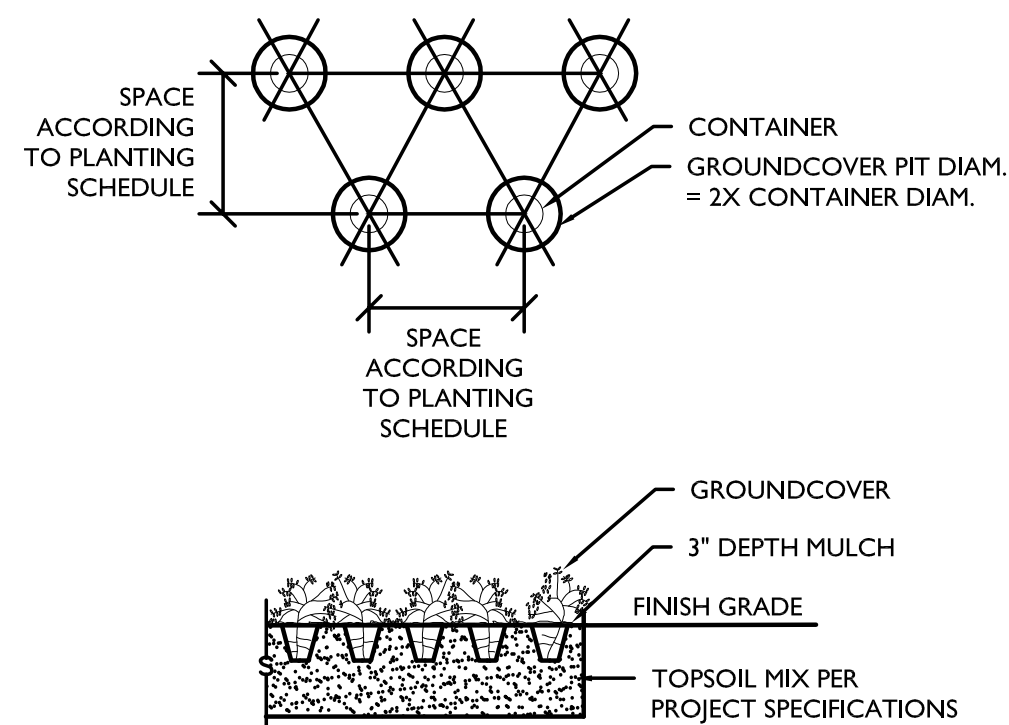

4 GROUNDCOVER INSTALLATION
NOT TO SCALE

LANDSCAPE NOTES:


- IF FIELD CONDITION DIFFERS FROM THE PLANS, CONTACT OWNER'S REPRESENTATIVE FOR DIRECTION PRIOR TO PROCEEDING WITH WORK.
- EXISTING UTILITY LOCATIONS SHOWN ON THESE PLANS ARE BASED ON THE BEST INFORMATION AVAILABLE & ARE INCLUDED FOR THE CONTRACTOR'S CONVENIENCE. THEY ARE NOT REPRESENTED TO BE EITHER COMPLETE OR ACCURATE.
- THE CONTRACTOR SHALL VERIFY THE LOCATION & DEPTH OF ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION IN ORDER TO PROVIDE NON-INTERRUPTION OF SERVICE & TO INSURE PROPER CLEARANCE.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REPAIR & ASSOCIATED COSTS OF ANY DAMAGE TO UTILITIES CAUSED BY WORK PERFORMED AS INDICATED ON THE DRAWINGS & IN THE SPECIFICATIONS.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR KEEPING ALL STREETS SURROUNDING THE PROJECT FREE OF MUD & OTHER DEBRIS.
- THE CONTRACTOR SHALL PROVIDE ANY TRAFFIC HANDLING MEASURES FOR BOTH VEHICULAR & PEDESTRIAN TRAFFIC AS NECESSARY TO ENSURE THAT THE GENERAL PUBLIC IS PROTECTED AT ALL TIMES.
- ANY DAMAGE TO EXISTING PAVED, GRASSED, OR TREED AREAS NOT SCHEDULED FOR DEMOLITION ARE TO BE REPLACED WITH IN-KIND MATERIALS.
- GRAPHIC SYMBOLS SHOWN ON PLAN SHALL SUPERSEDE QUANTITIES SHOWN IN LABELS OR THE SCHEDULE.
- ALL LANDSCAPE AREAS AND PLANT MATERIAL SHALL BE IRRIGATED BY AN AUTOMATIC UNDERGROUND IRRIGATION SYSTEM. THE IRRIGATION SYSTEM DESIGN, INSTALLATION, OPERATION AND MAINTENANCE SHALL BE IN CONFORMANCE WITH THE CITY OF MANHATTAN IRRIGATION ORDINANCE.

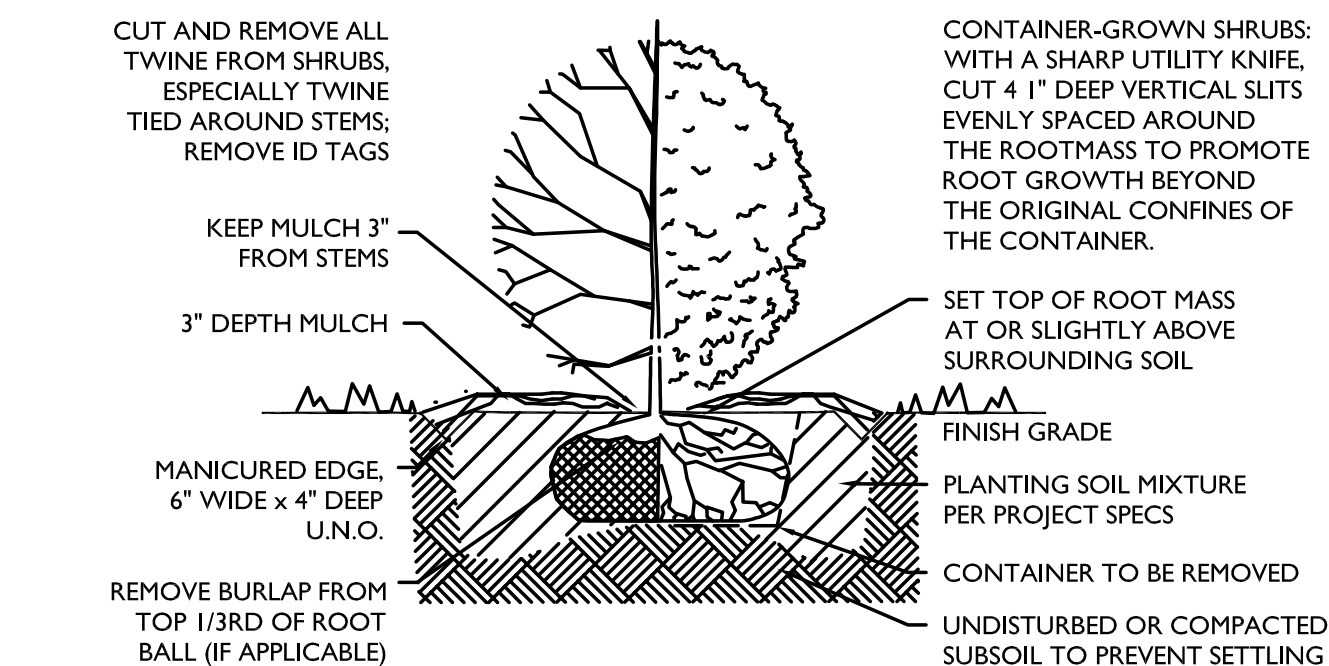

3 SHRUB / ORNAMENTAL GRASS INSTALLATION
NOT TO SCALE

QTY	SCIENTIFIC NAME	COMMON NAME	SIZE	NOTES / SPACING
Trees				
8	Juniperus chinensis 'Spartan'	Spartan Juniper	8' height	B&B
6	Ulmus (carpinifolia x parvifolia) 'Frontier'	Frontier Hybrid Elm	3" cal.	B&B
Shrubs / Ornamental Grasses				
15	Yucca Filamentosa	Color Guard Adams Needle	3 gal.	Cont.
Groundcovers & Vines				
5	Hedera helix 'Patricia'	English Ivy	1 gal.	
493	Festuca glauca 'Elijah Blue'	Blue Fescue Grass	4" pot	12" O.C.
658	Liriope spicata	Creeping Liriope	4" pot	18" O.C.
804	Pachysandra terminalis 'Green Carpet'	Japanese pachysandra	4" pot	12" O.C.

1 PLANT SCHEDULE
NOT TO SCALE

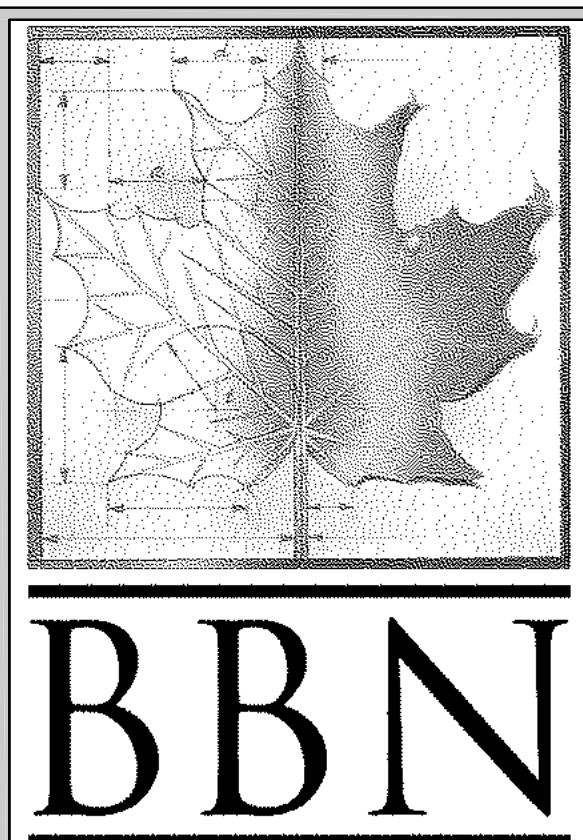

BBN ARCHITECTS INC
411 NICHOLS ROAD, SUITE 246
KANSAS CITY, MO 64112
PH: 816-753-2550
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect. © BBN Architects, Inc.

REVISIONS:

1	
2	
3	
4	
5	
6	
7	

Project Number:

Date: MAY 23, 2022

Project Name:

PARKSIDE RESTAURANT

Project Address:




1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:

PLANTING PLAN

Sheet:

L101

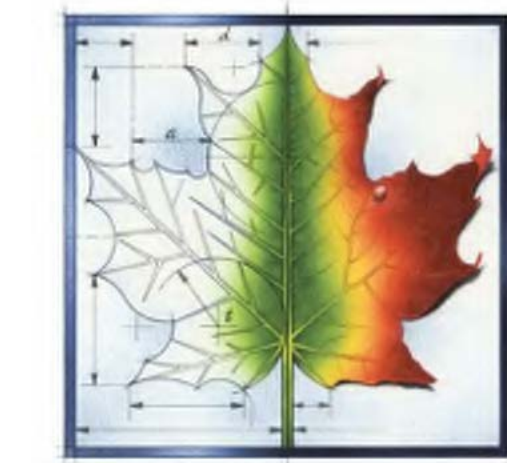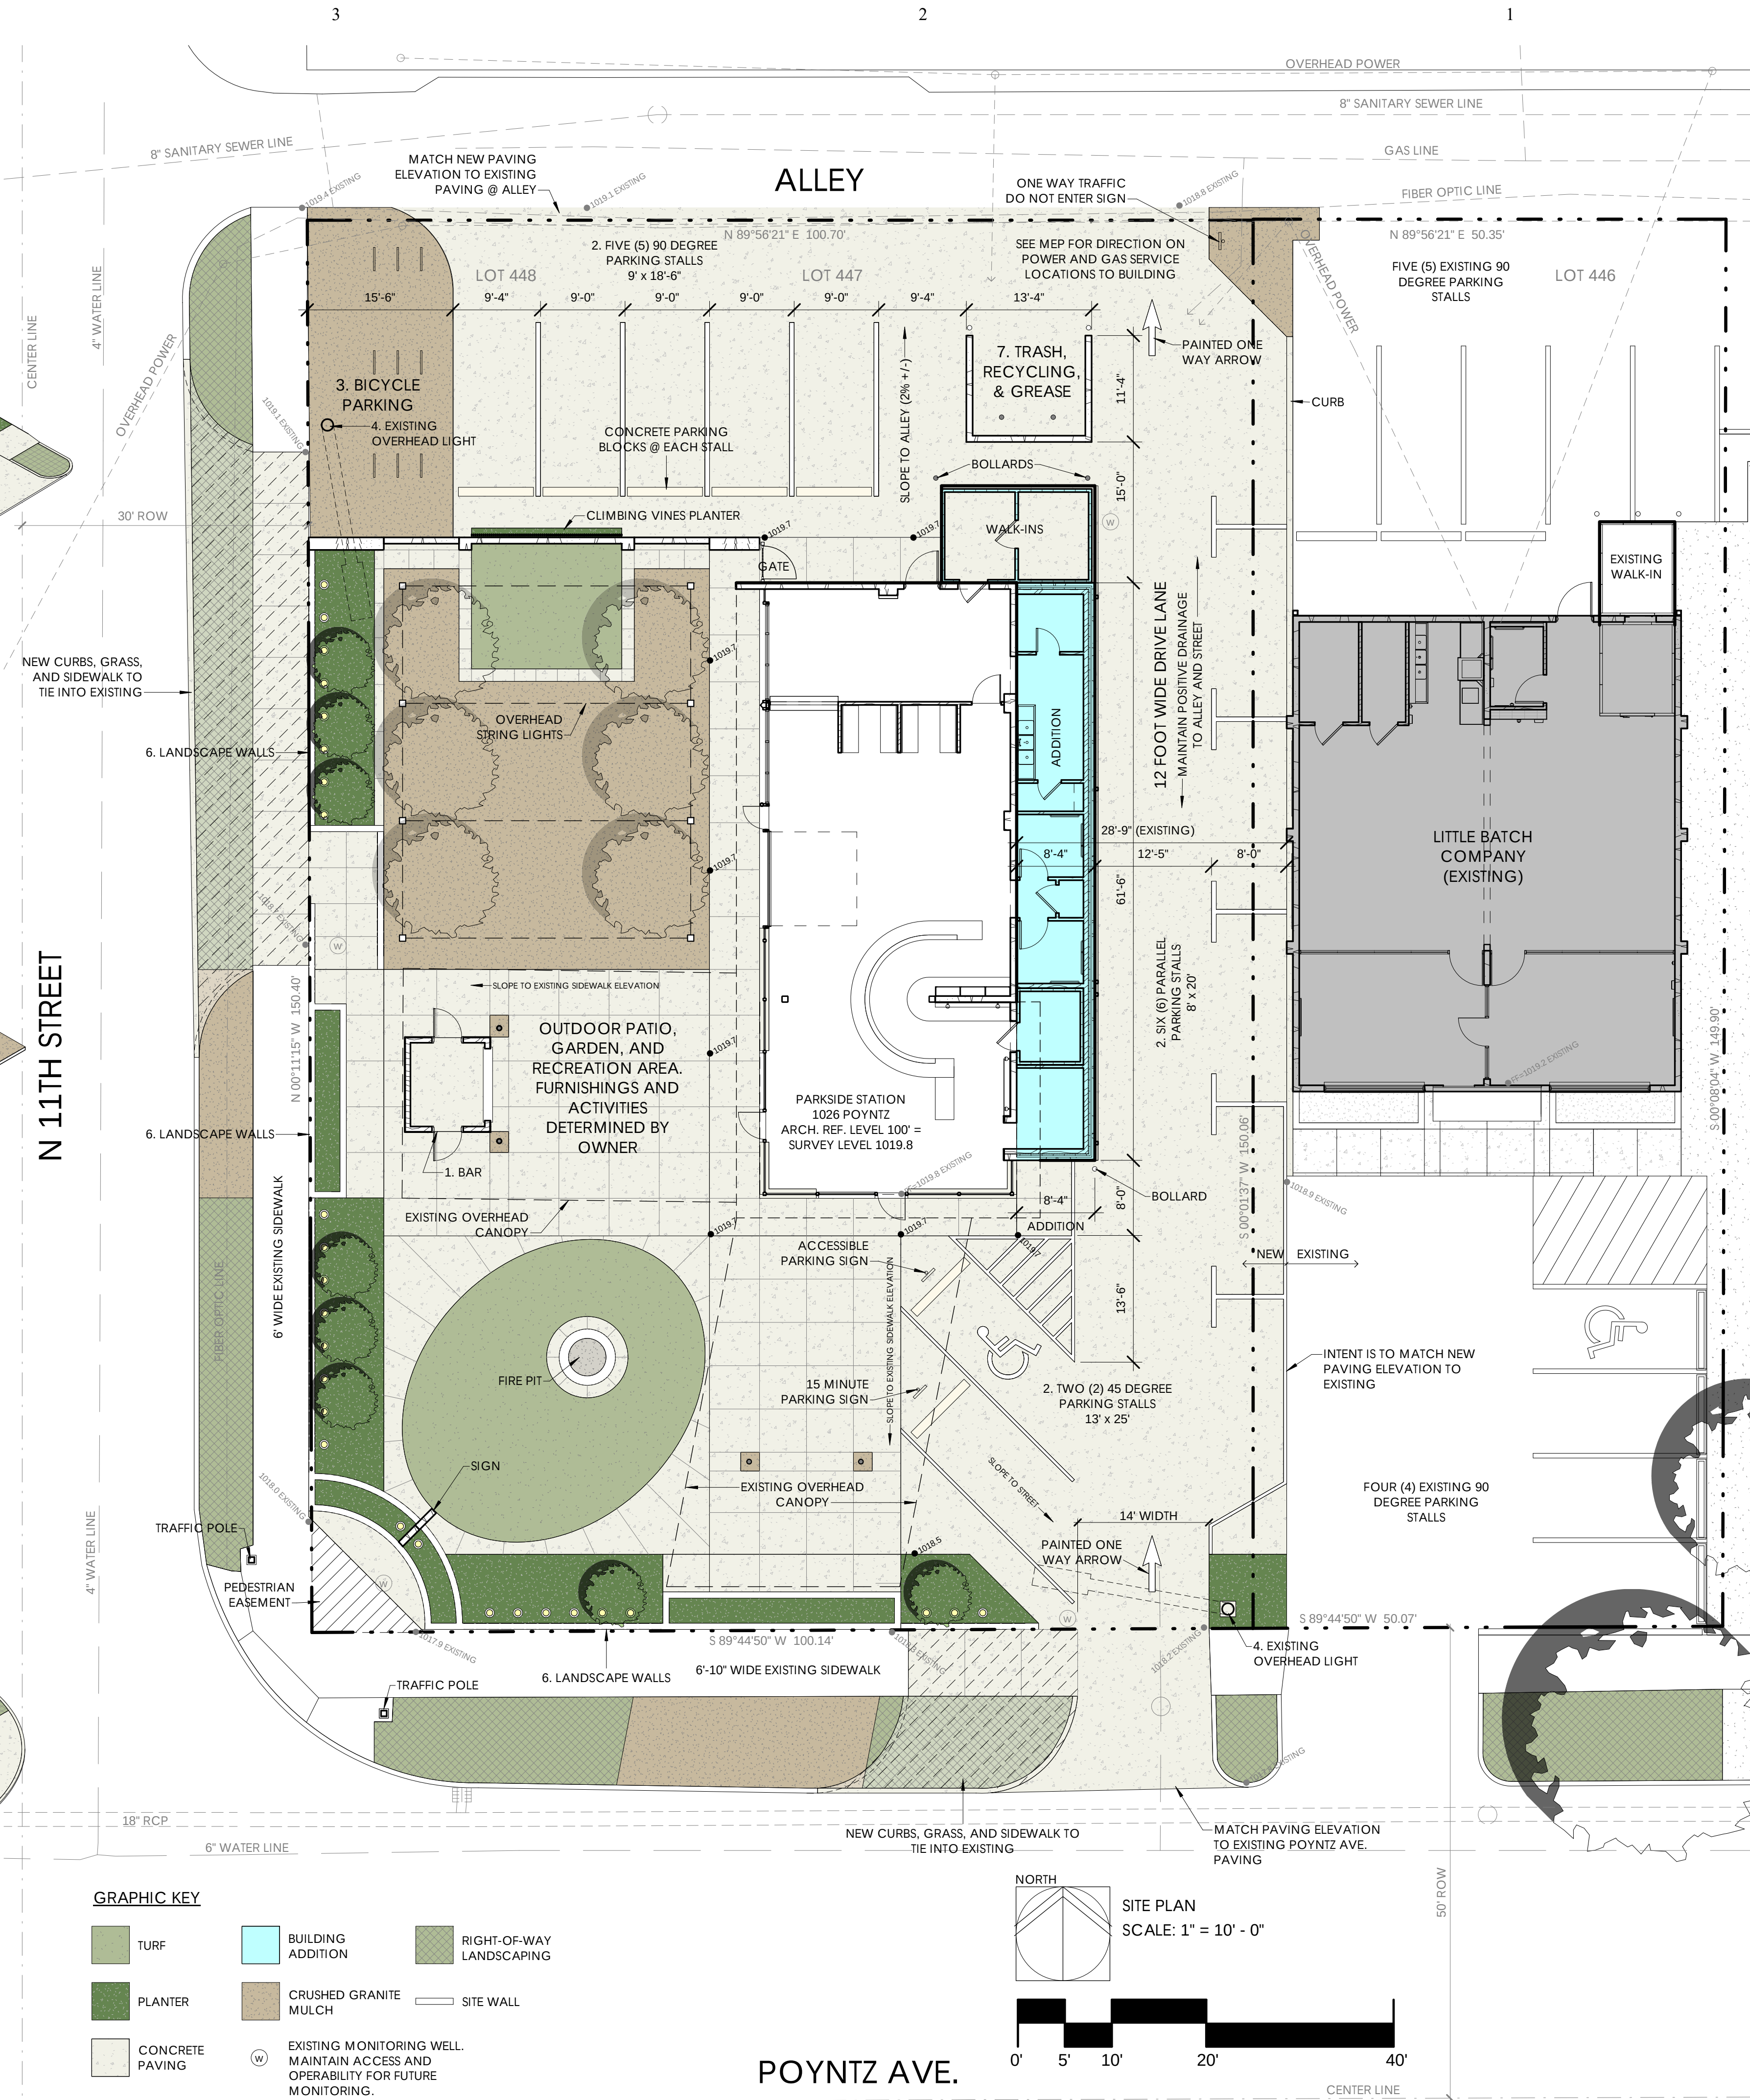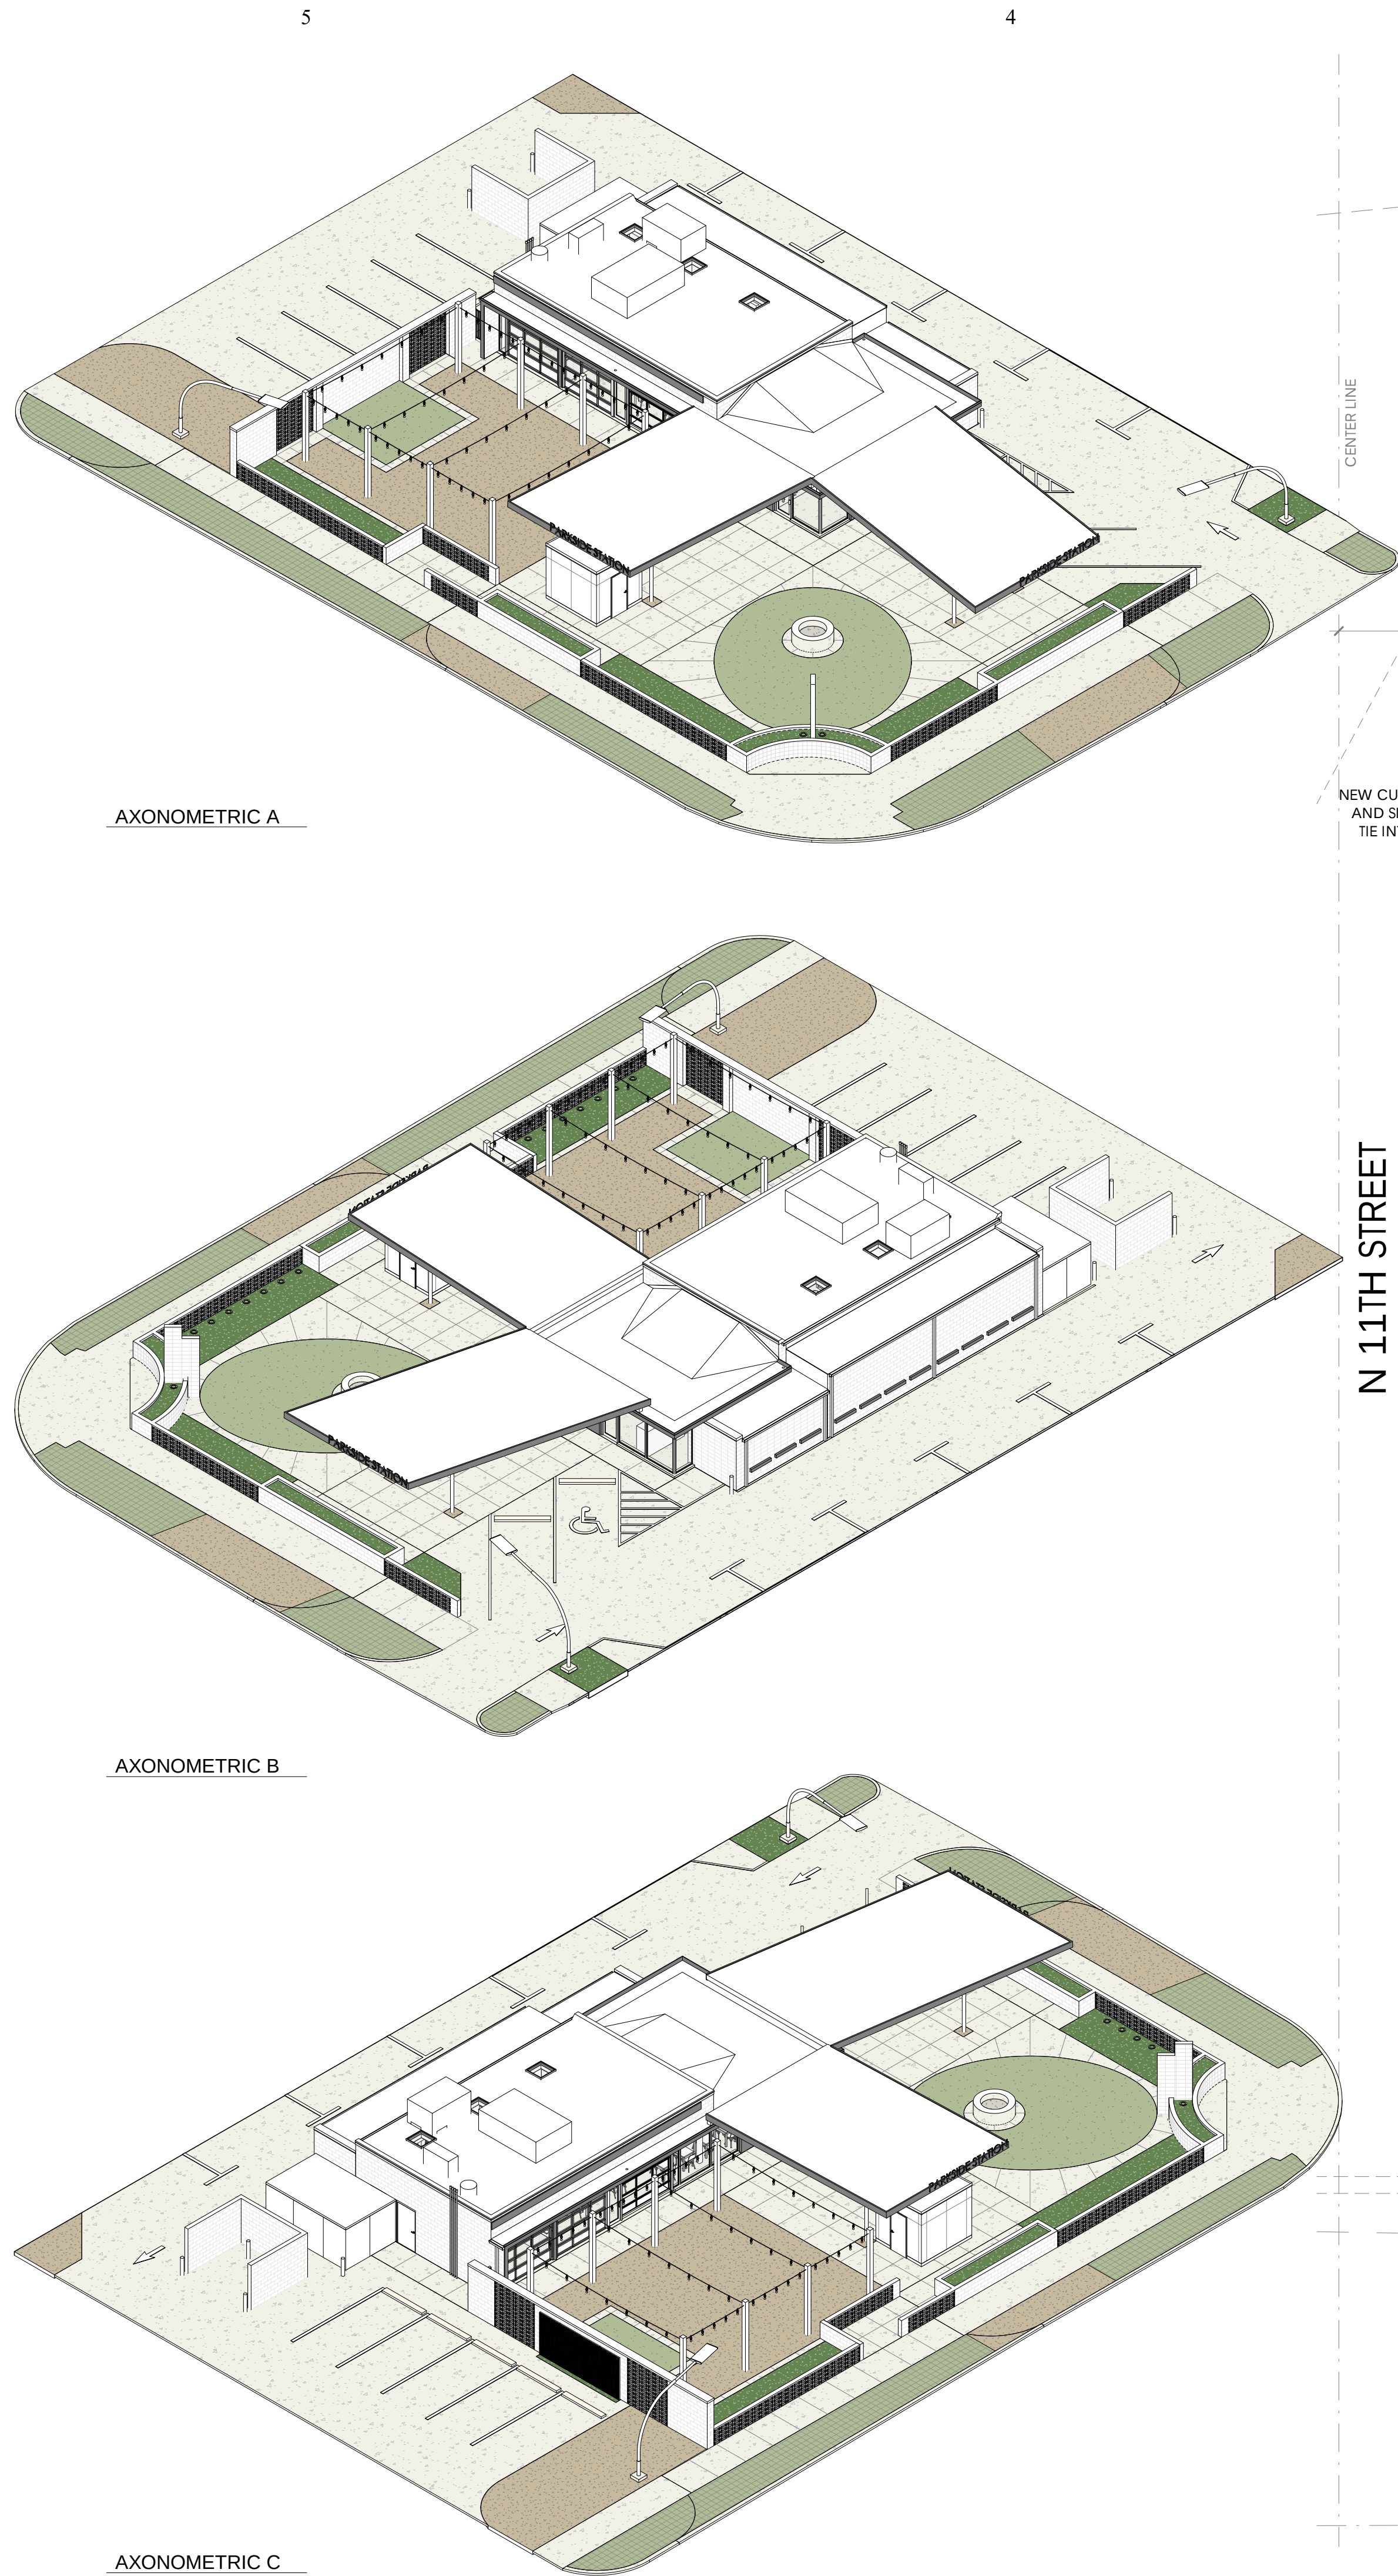

INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

- NOTES:**
- BAR: INTENT IS FOR STAND ALONE, INSULATED "BOX" TO SERVE AS A BAR FOR OUTDOOR PATRONS. PROVIDE WATER AND DRAIN LINE.
 - PARKING: PROVIDE 4" WIDE TYPICAL WHITE PAINTED STALL STRIPING.
 - BICYCLE PARKING: COORDINATE SELECTION AND INSTALLATION OF BICYCLE RACKS WITH THE OWNER. ARCHITECT WILL ASSIST AS REQUIRED.
 - EXISTING OVERHEAD LIGHTS: RELAMP LIGHTS (RE-ELECTRICAL) AND PAINT EXISTING POLES AS DIRECTED BY OWNER.
 - CONCRETE JOINTS: PEDESTRIAN SIDEWALK JOINTS ARE SHOWN AND ARE INTENDED TO BE A GUIDE. ARCHITECT WILL CONSIDER ALTERNATIVE JOINT LAYOUTS AS PROPOSED BY CONTRACTOR. DRIVE PAVING JOINTS ARE NOT SHOWN FOR GRAPHIC CLARITY. GC TO WORK WITH SUB CONTRACTORS TO DETERMINE RECOMMENDED JOINT LAYOUT.
 - LANDSCAPE WALLS: INTENT IS FOR THE WEST AND SOUTH LANDSCAPE WALLS TO ALIGN WITH THE EDGE OF THE EXISTING SIDEWALK PAVING. VERIFY ALIGNMENT AND COORDINATE WITH ARCHITECT AS NEEDED.
 - TRASH ENCLOSURE: VERIFY SIZE AND DUMPSTER NEEDS WITH OWNER.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

PARKSIDE RESTAURANT

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:

SITE PLAN

Sheet:

A1.00

Of:






5

4

3


2

1

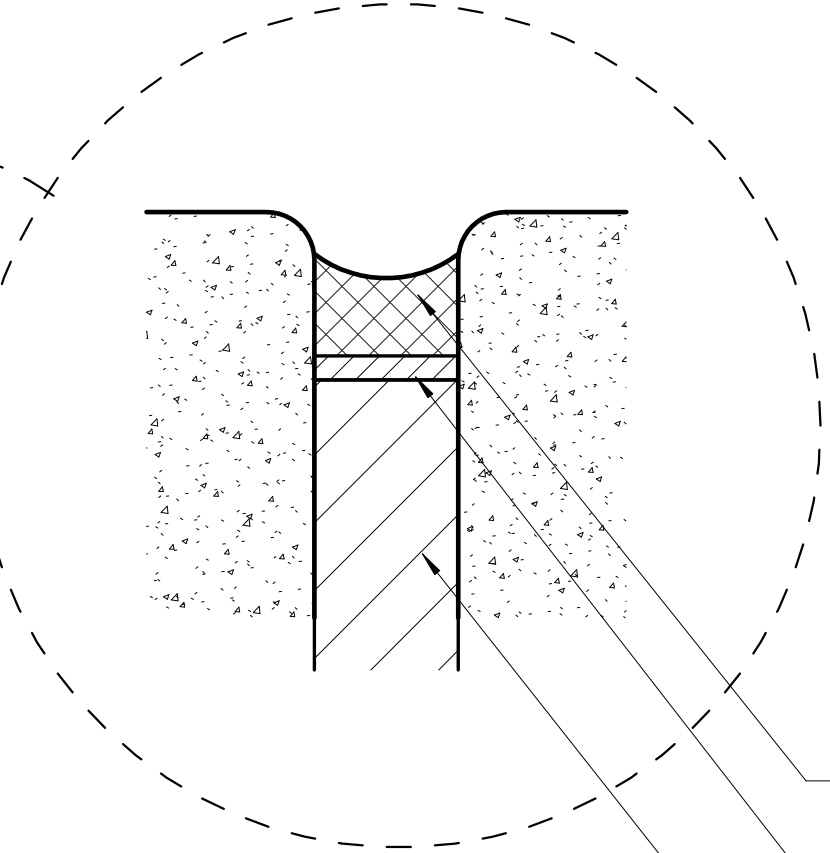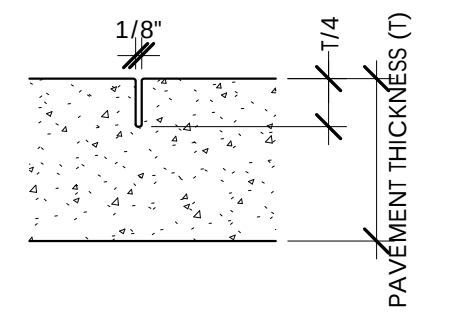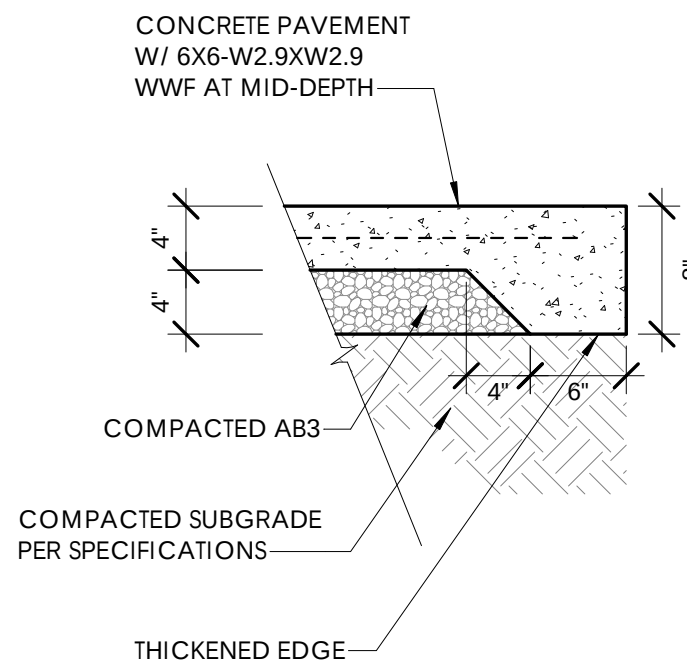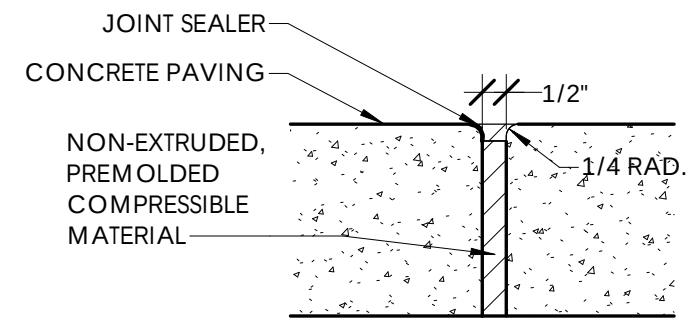


JOINT SEALER
BOND BREAKER MATERIAL
NON-EXTRUDED, PREMOLDED
COMPRESSIBLE MATERIAL


A4
A1.01 PAVEMENT DETAILS
NOT TO SCALE

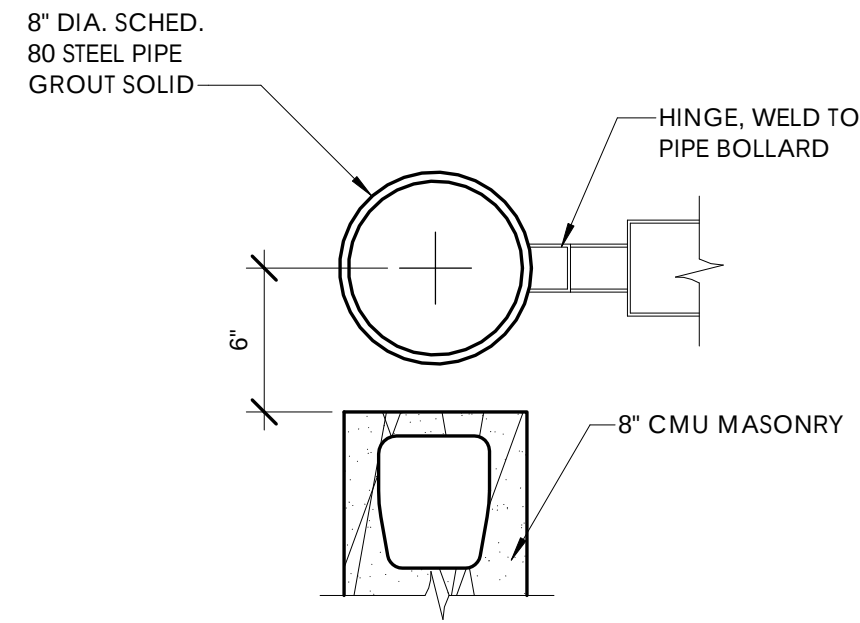




C5
A1.01 DETAIL @ TRASH ENCLOSURE GATE
1 1/2" = 1'-0"

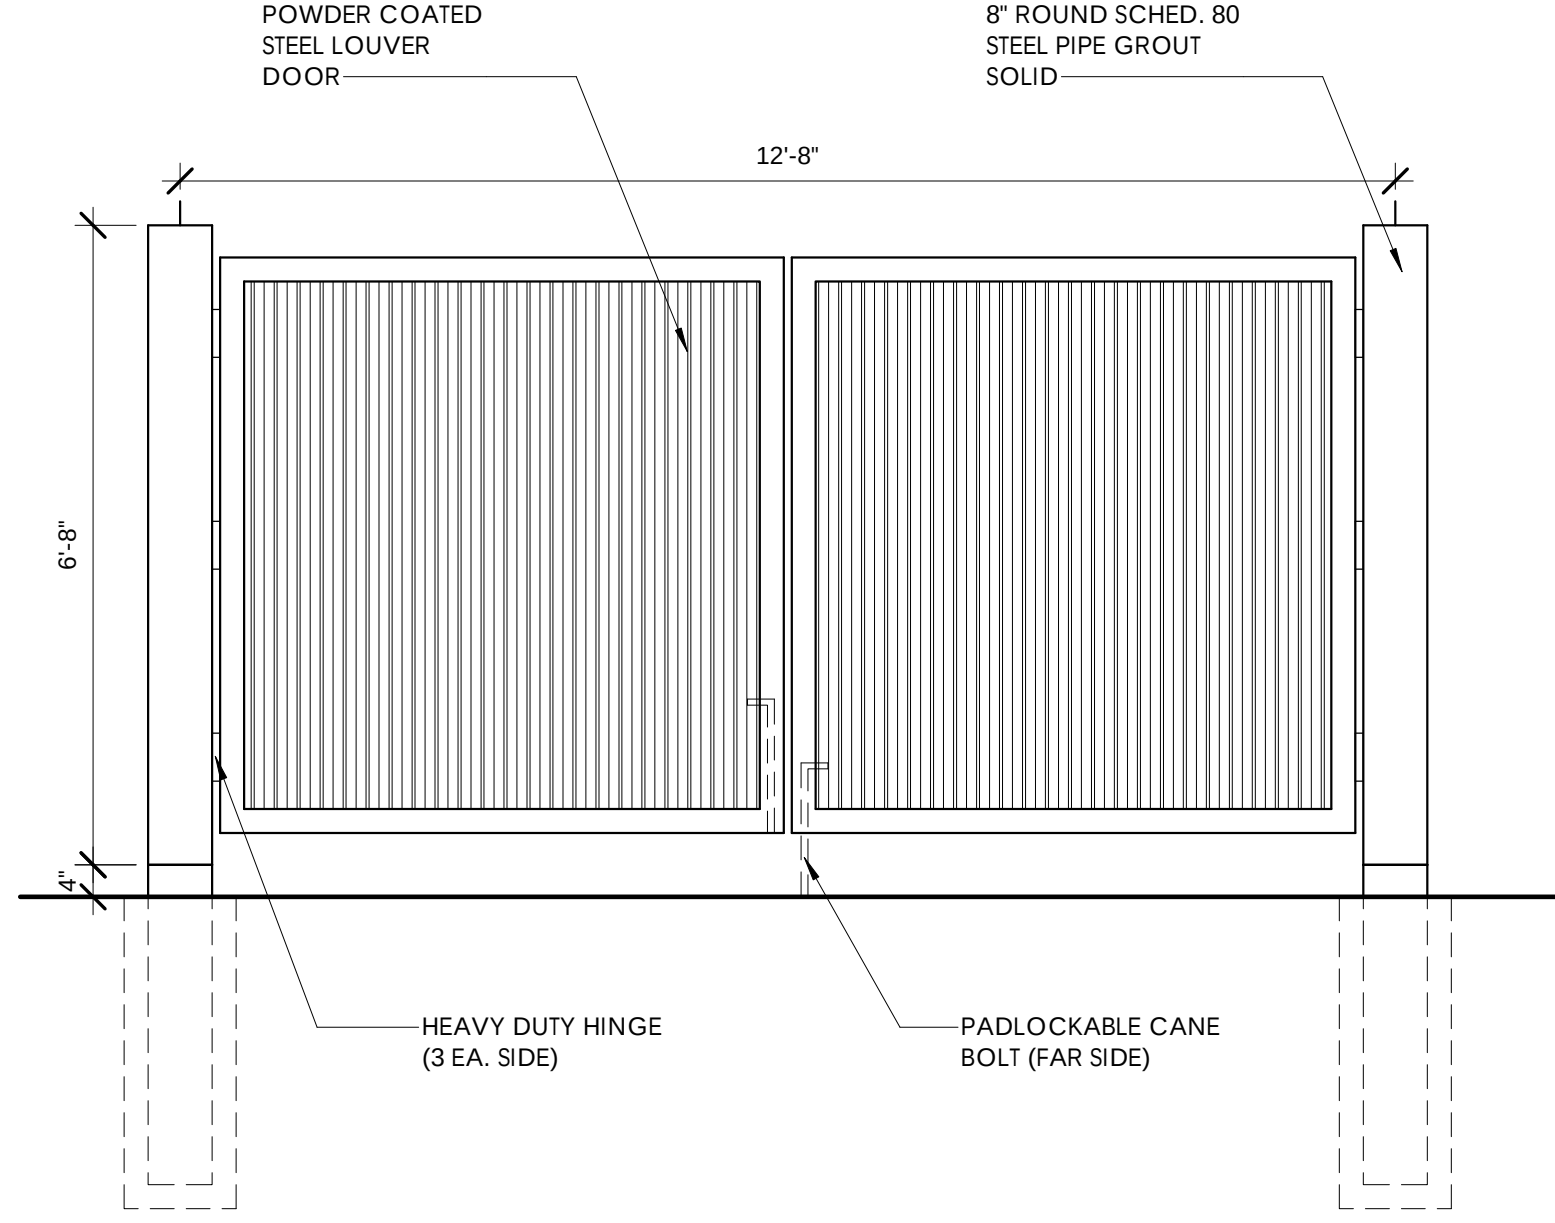




C4
A1.01 ELEVATION @ TRASH ENCLOSURE GATE
1/2" = 1'-0"

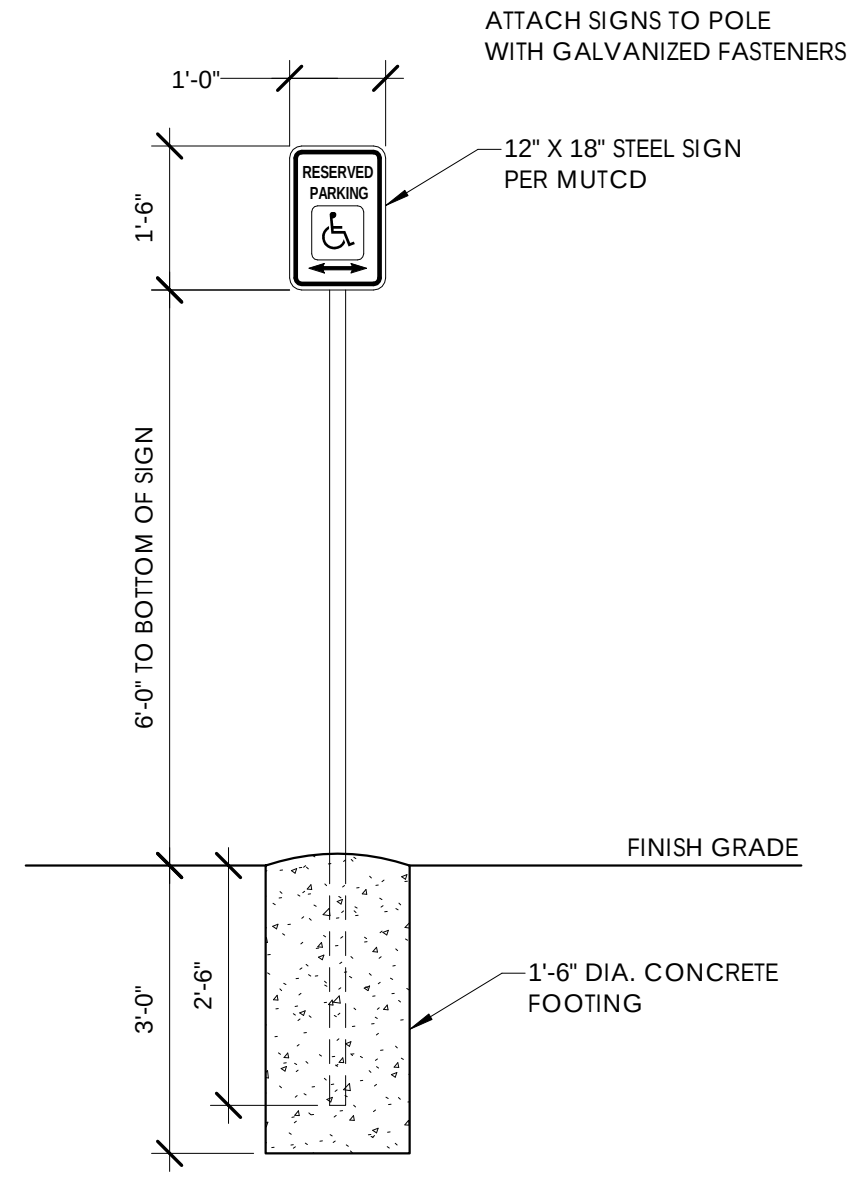

D5
A1.01 POLE MOUNTED SIGN
1/2" = 1'-0"

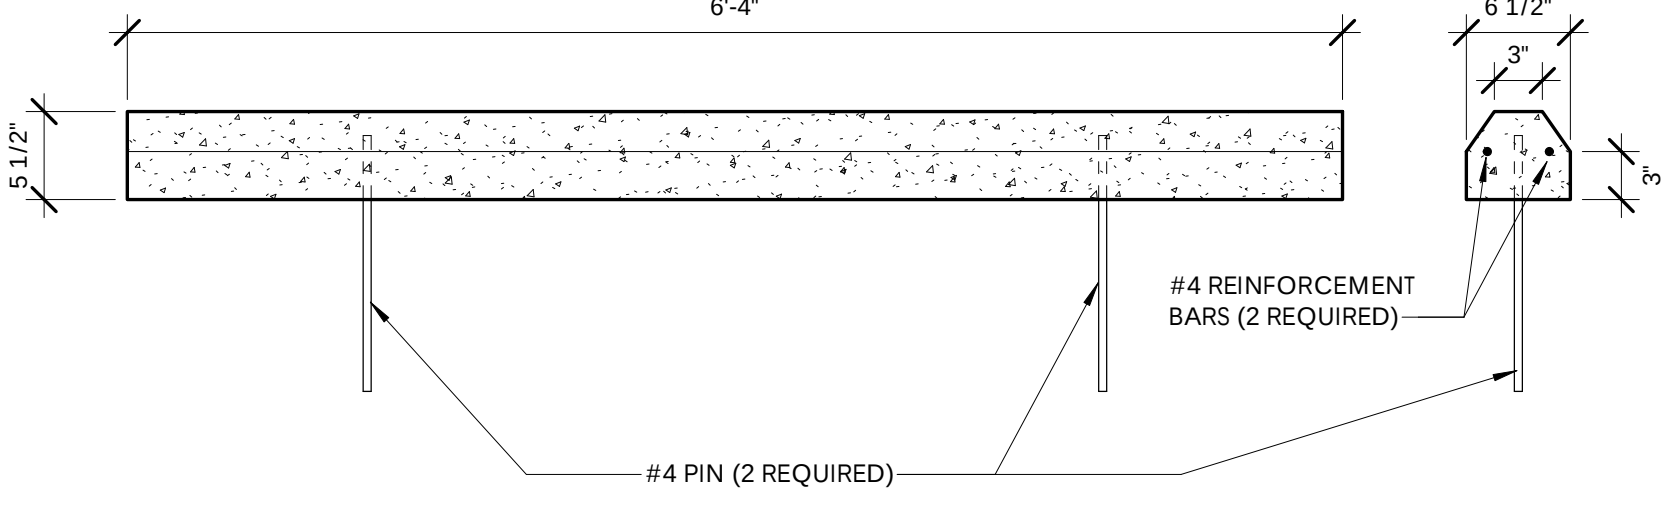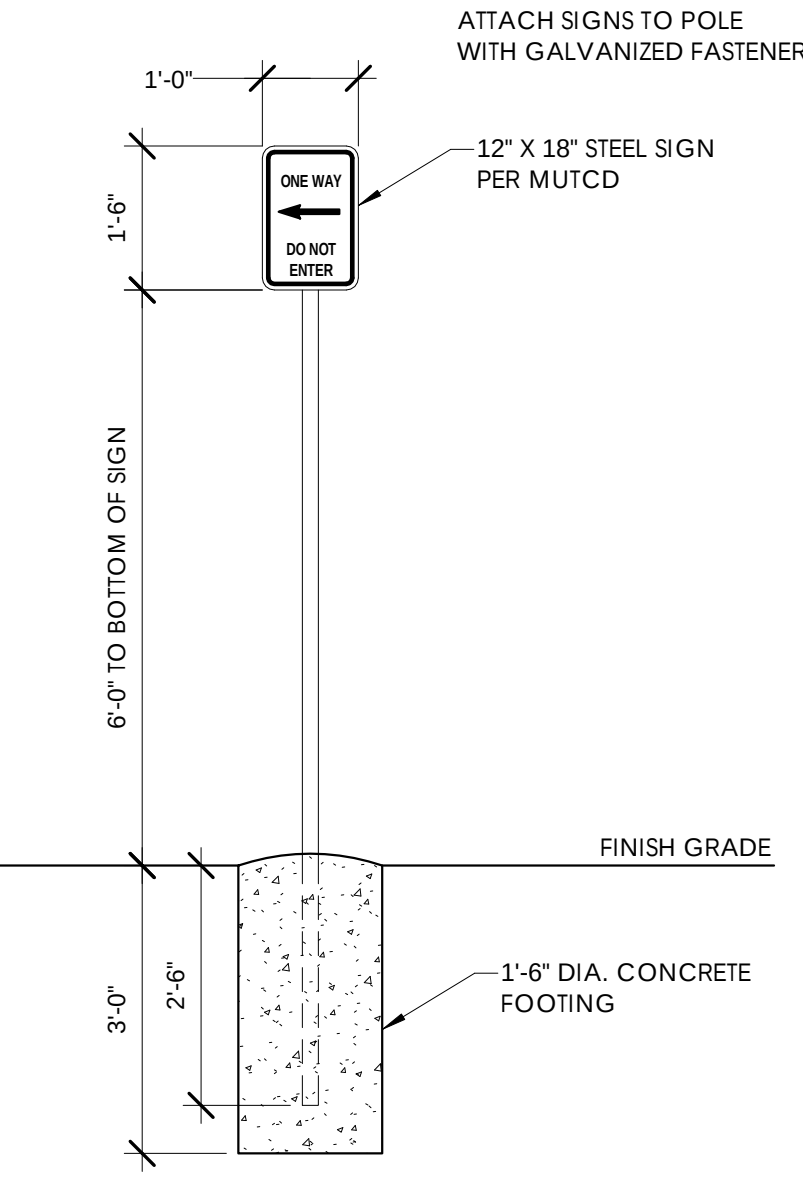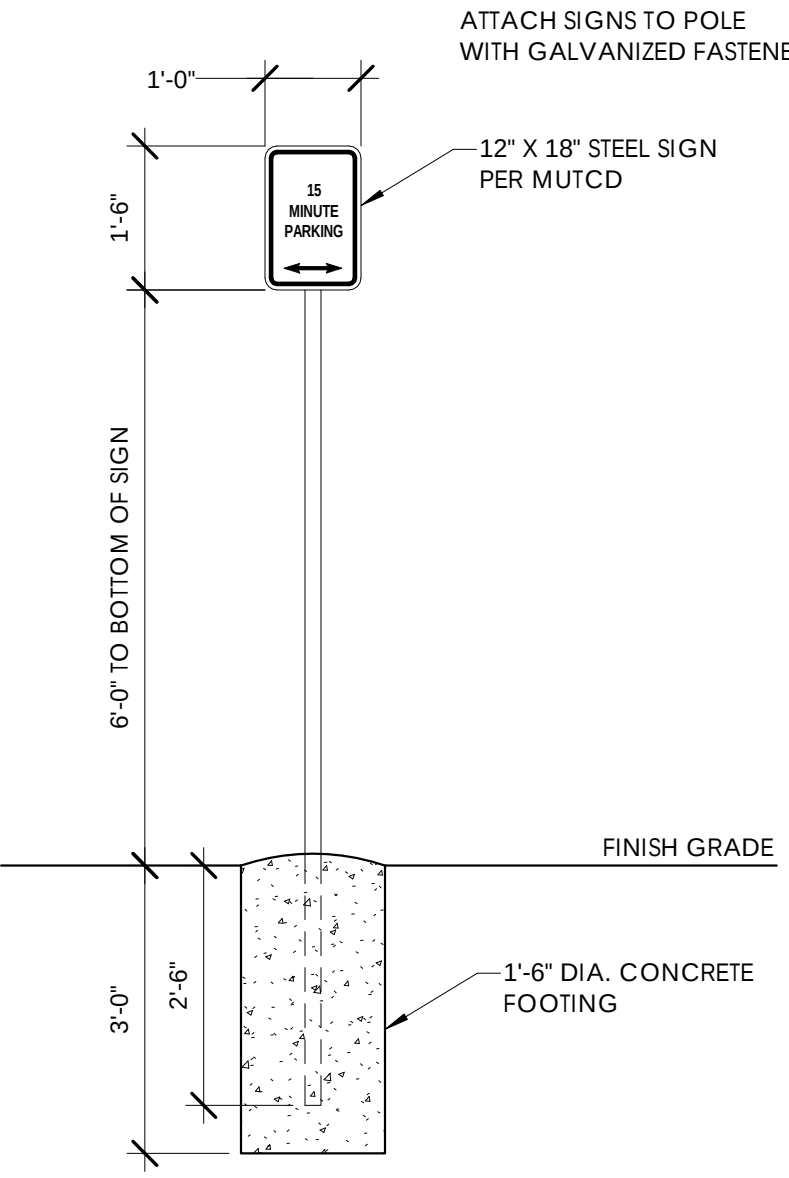

A2
A1.01 WHEEL STOP DETAIL
1" = 1'-0"

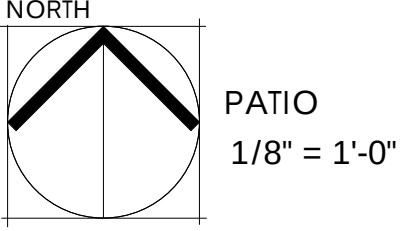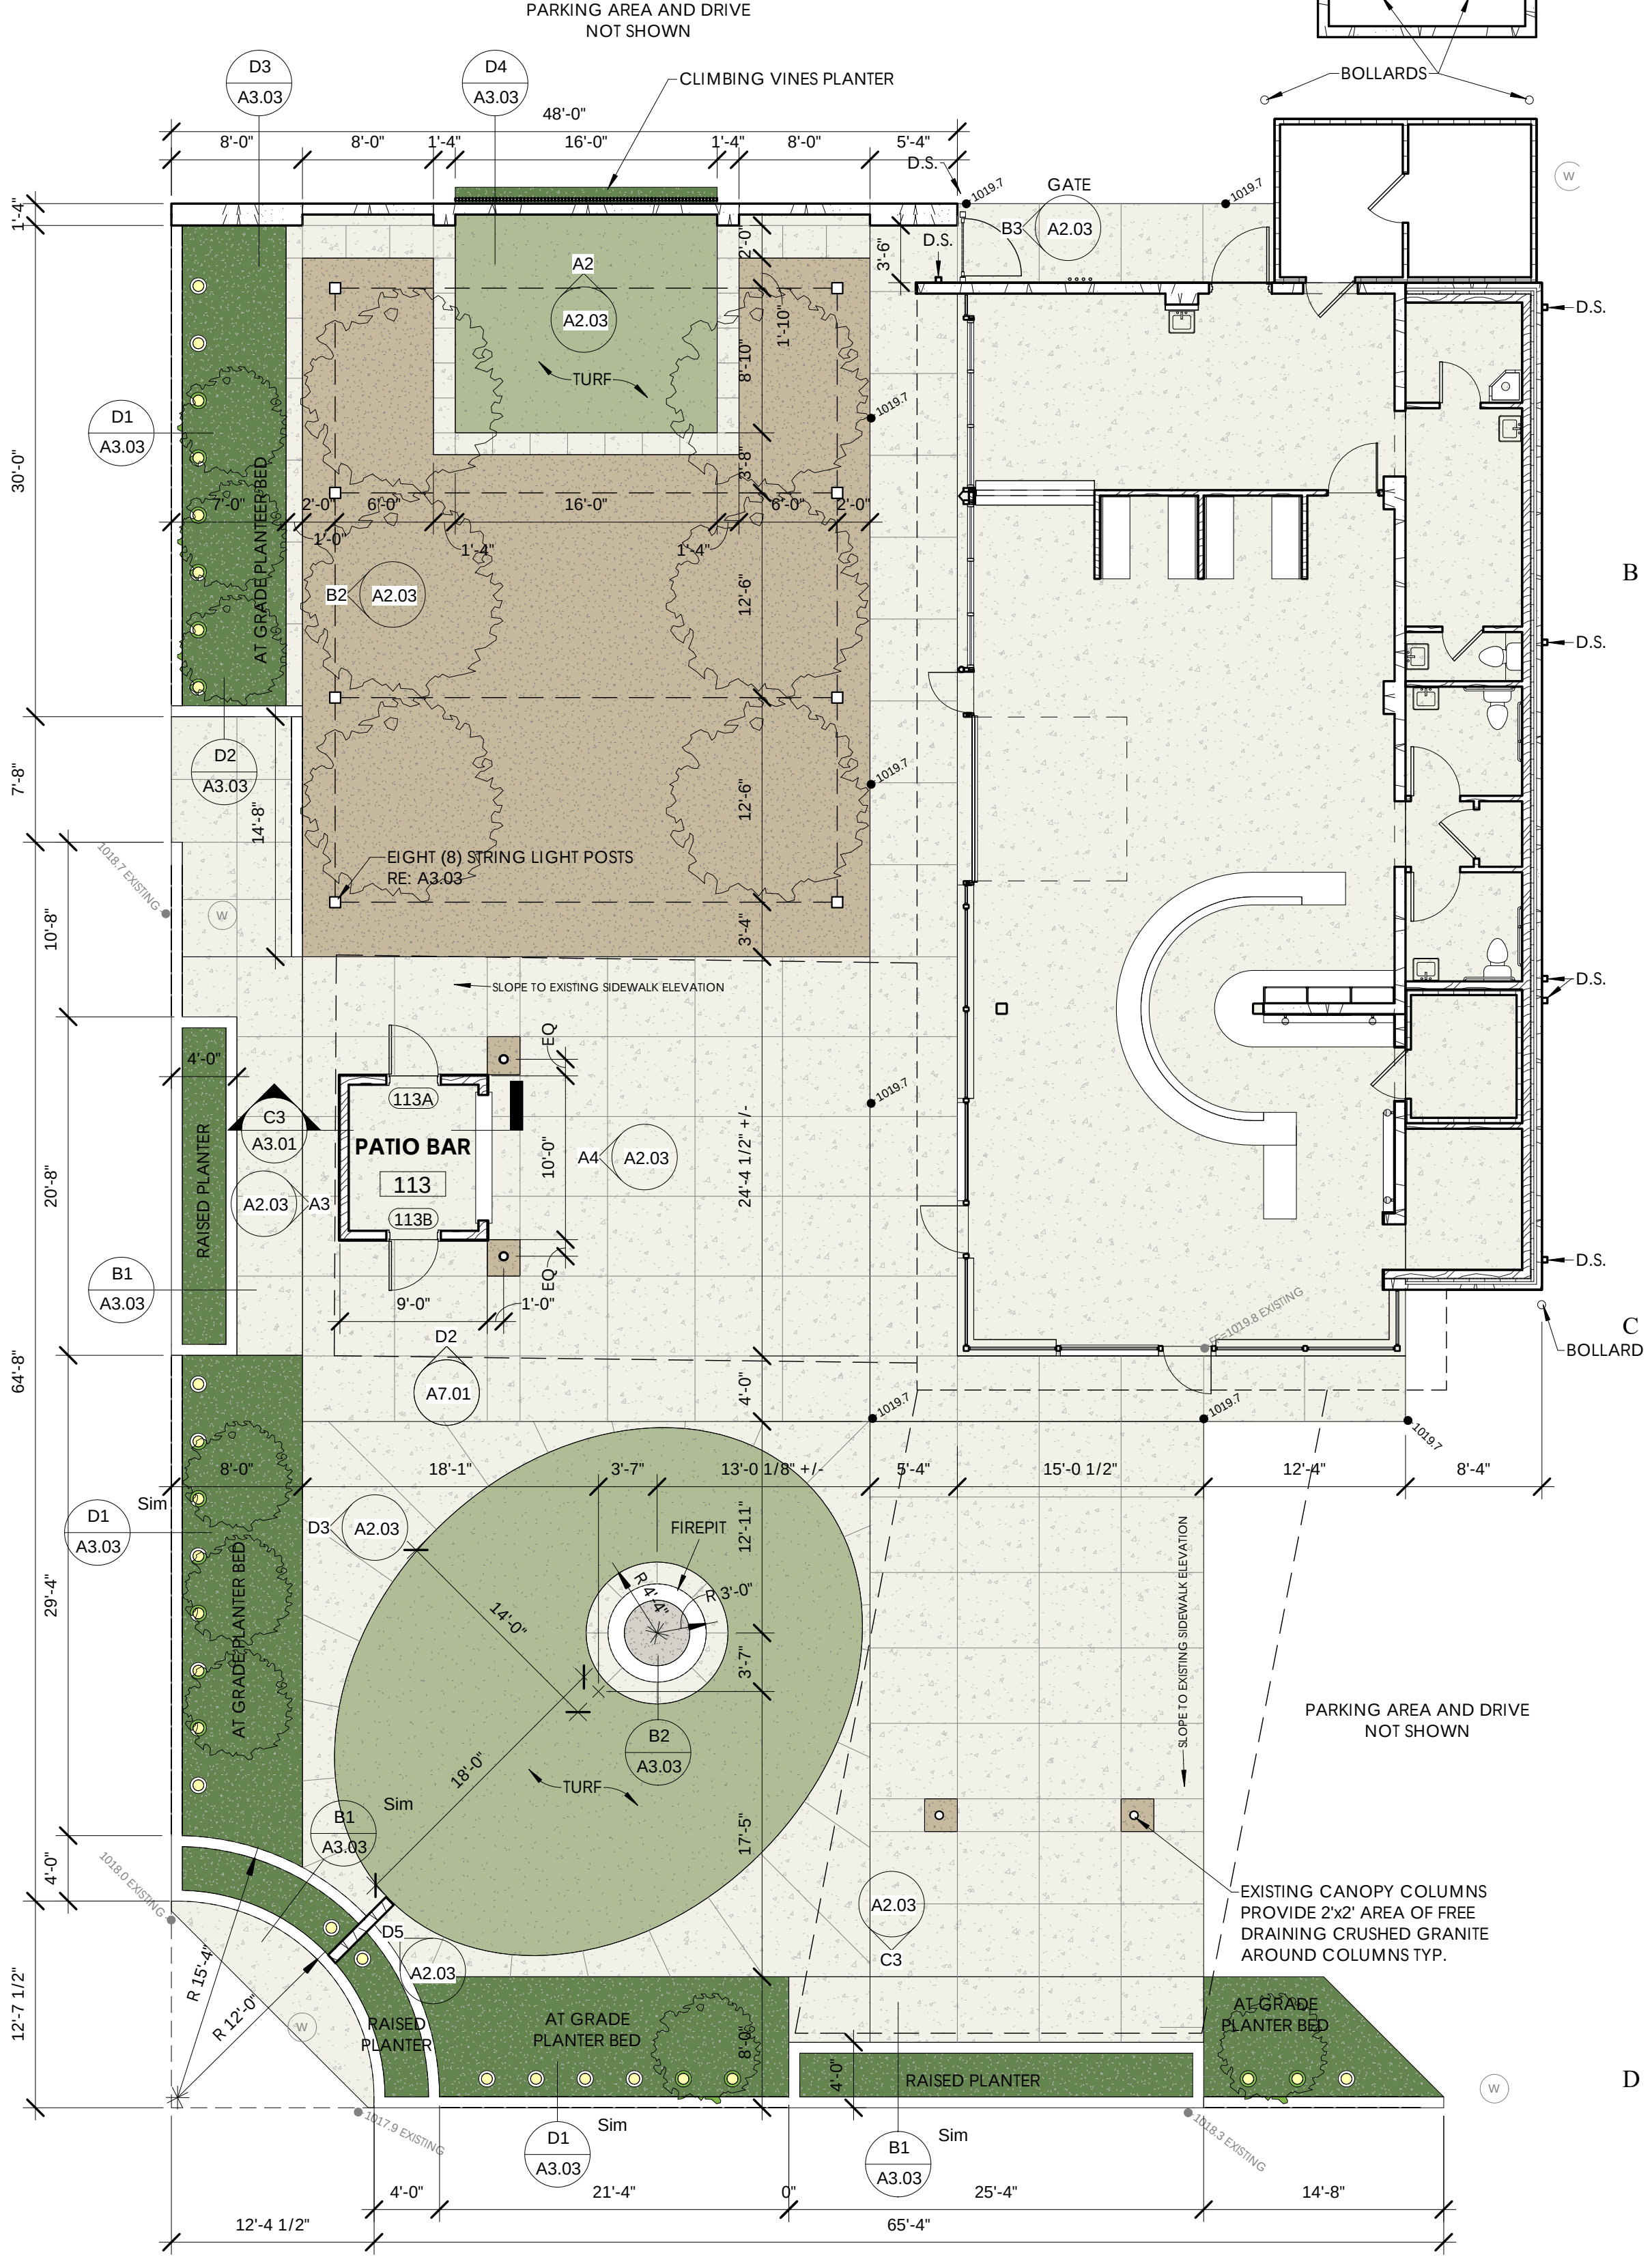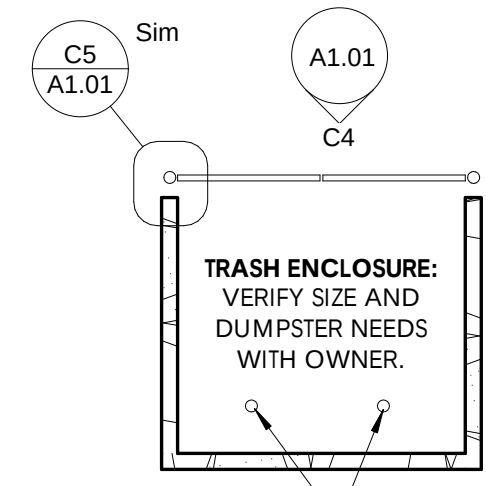

INTEGRATING NATURE
AND ARCHITECTURE
BBN
ARCHITECTS
INC.
228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:

PATIO

Sheet:


A1.01

Of:

OWNER-PROVIDED KITCHEN EQUIPMENT:

- 72" 4 DRAWER REFRIGERATED CHEF BASE
- 72" 1 DOOR PIZZA PREP TABLE
- 36" TWO DRAWER, 8 PAN REFRIGERATED TOP SALAD PREP STATION
- 30x96" STAINLESS PREP TABLE WITH SINK
- 6 BURNER COUNTERTOP GAS RANGE
- 36" COUNTERTOP GAS GRIDDLE
- 96" LONG 3 COMPARTMENT SINK
- 11' LONG DISH WASH RUN
- FRYER

THIS LIST WAS PROVIDED BY THE OWNER, IS NOT FINAL, AND IS PROVIDED HERE FOR GENERAL REFERENCE ONLY. LOCATIONS ARE SUBJECT TO CHANGE. EQUIPMENT PURCHASED BY OWNER AND INSTALLED BY GC. VERIFY EQUIPMENT LIST AND INSTALLATION LOCATIONS WITH THE OWNER PRIOR TO COMMENCEMENT OF WORK AND COORDINATE MECHANICAL, ELECTRICAL, AND PLUMBING AS REQUIRED.

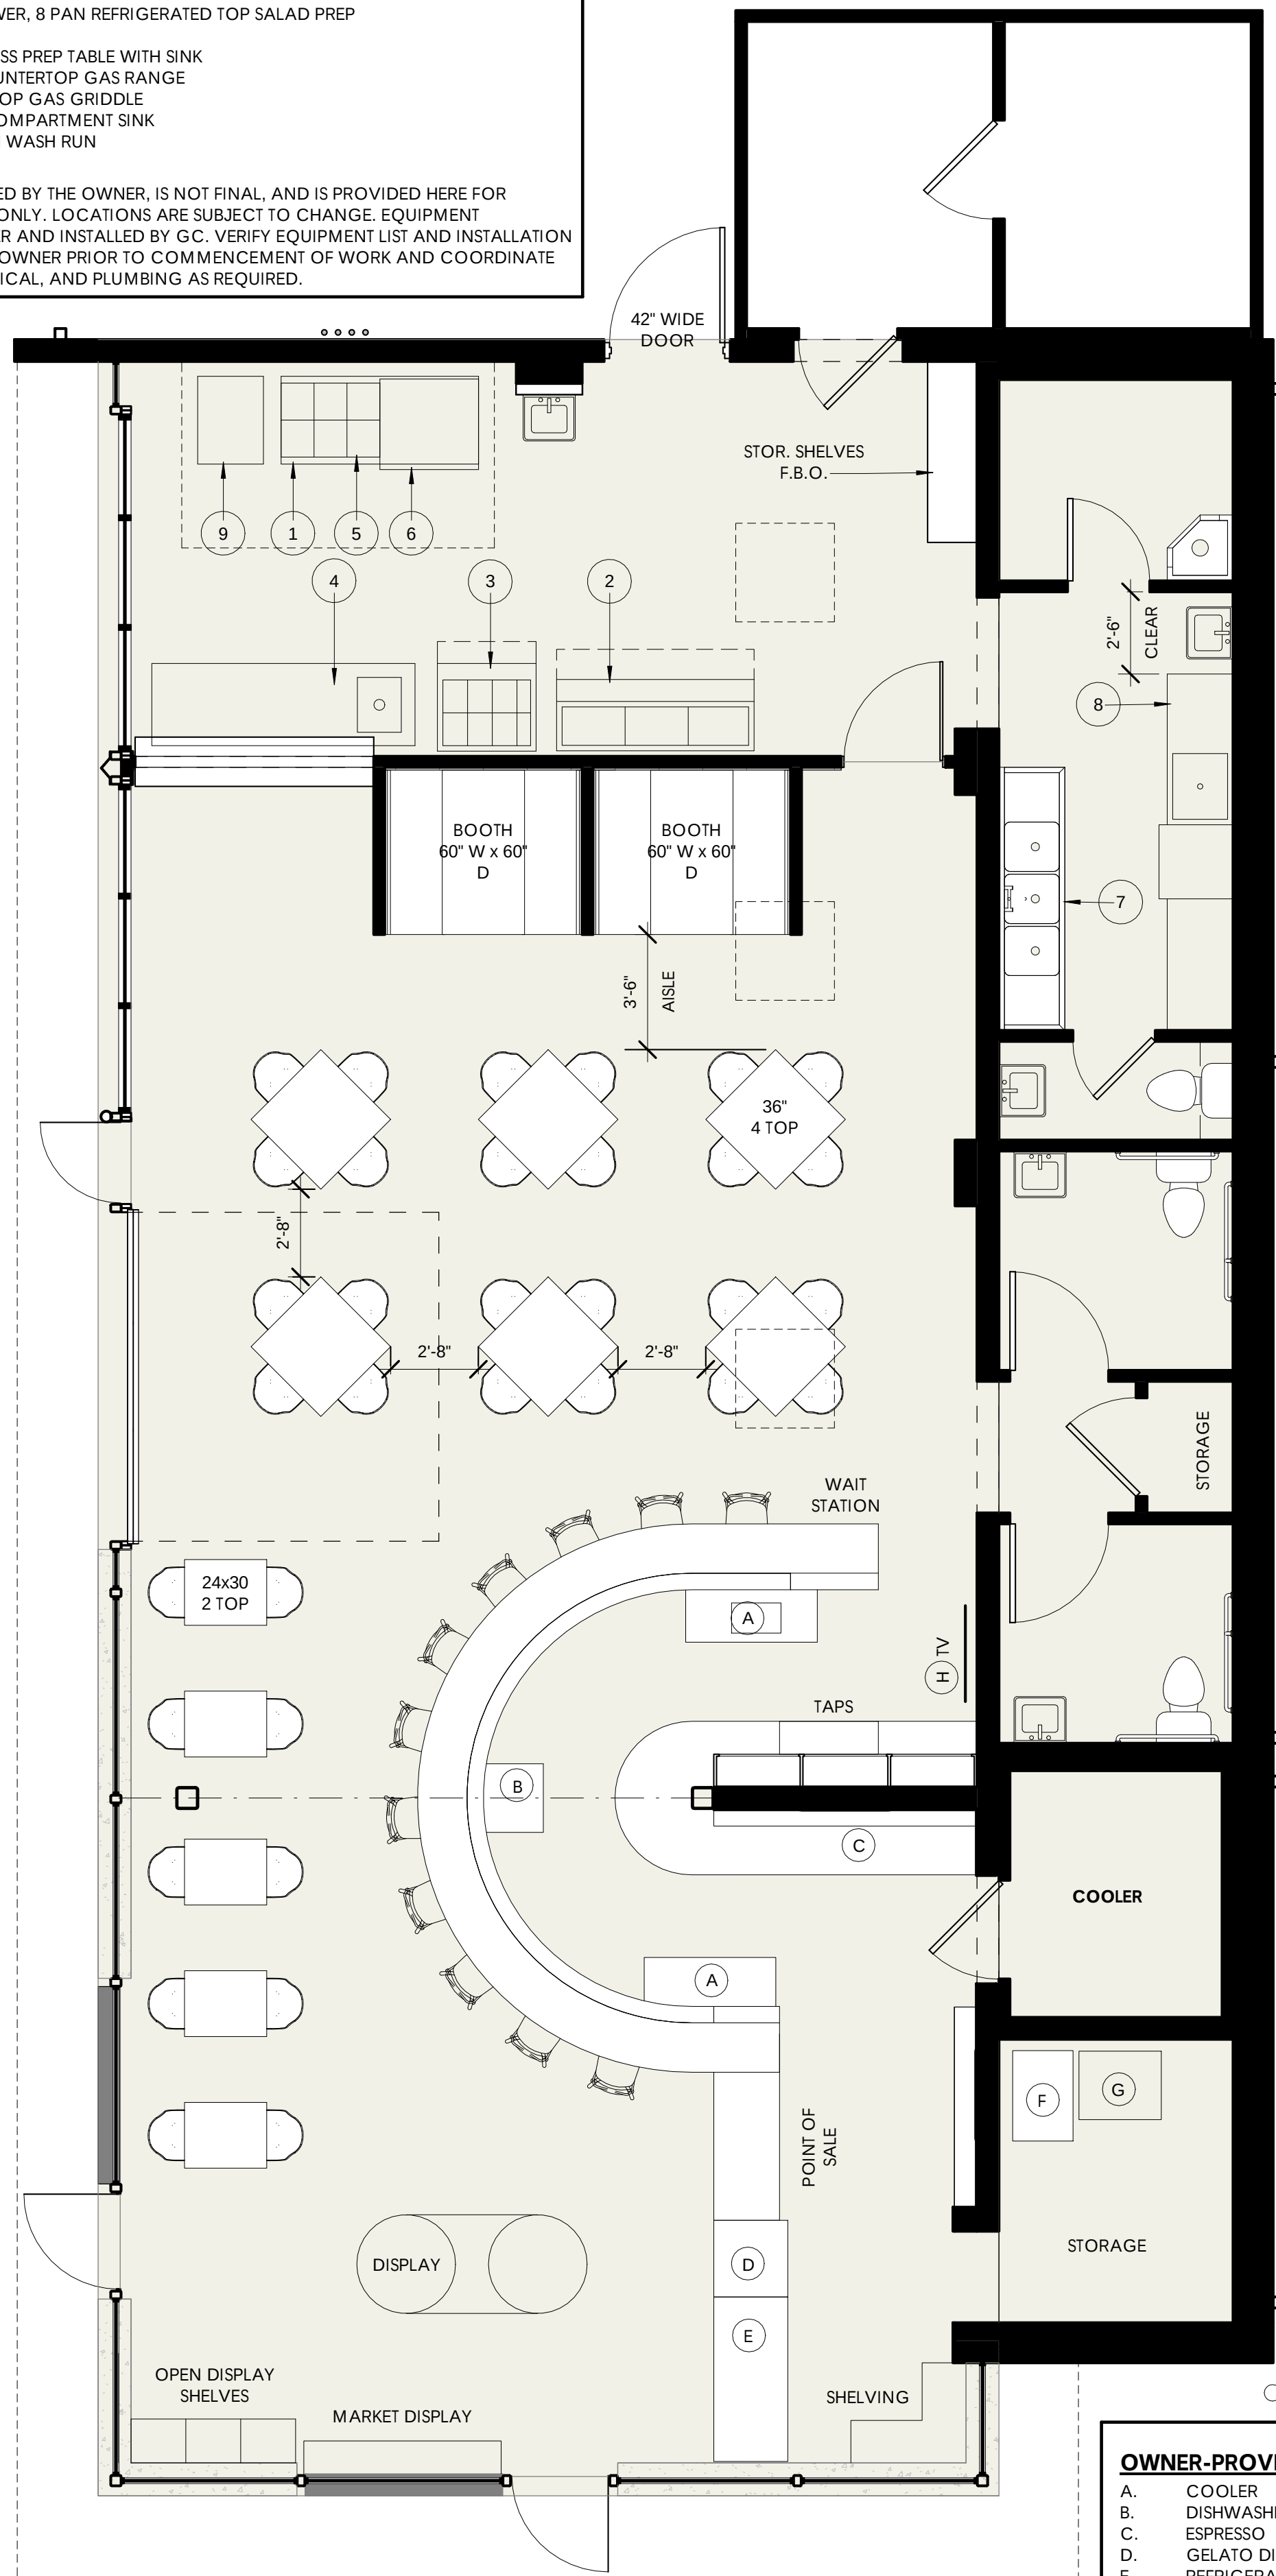


FURNISHING NOTE:

FURNISHINGS BY OWNER. PLAN PROVIDED FOR GENERAL INFORMATION ONLY.

OWNER-PROVIDED BAR EQUIPMENT:


- COOLER
- DISHWASHER
- ESPRESSO
- GELATO DISPLAY CASE
- REFRIGERATED BAKERY DISPLAY CASE
- ICE MACHINE
- SODA STORAGE
- TV

THIS LIST WAS PROVIDED BY THE OWNER, IS NOT FINAL, AND IS PROVIDED HERE FOR GENERAL REFERENCE ONLY. LOCATIONS ARE SUBJECT TO CHANGE. EQUIPMENT PURCHASED BY OWNER AND INSTALLED BY GC. VERIFY EQUIPMENT LIST WITH THE OWNER PRIOR TO COMMENCEMENT OF WORK AND COORDINATE MECHANICAL, ELECTRICAL, AND PLUMBING AS REQUIRED.

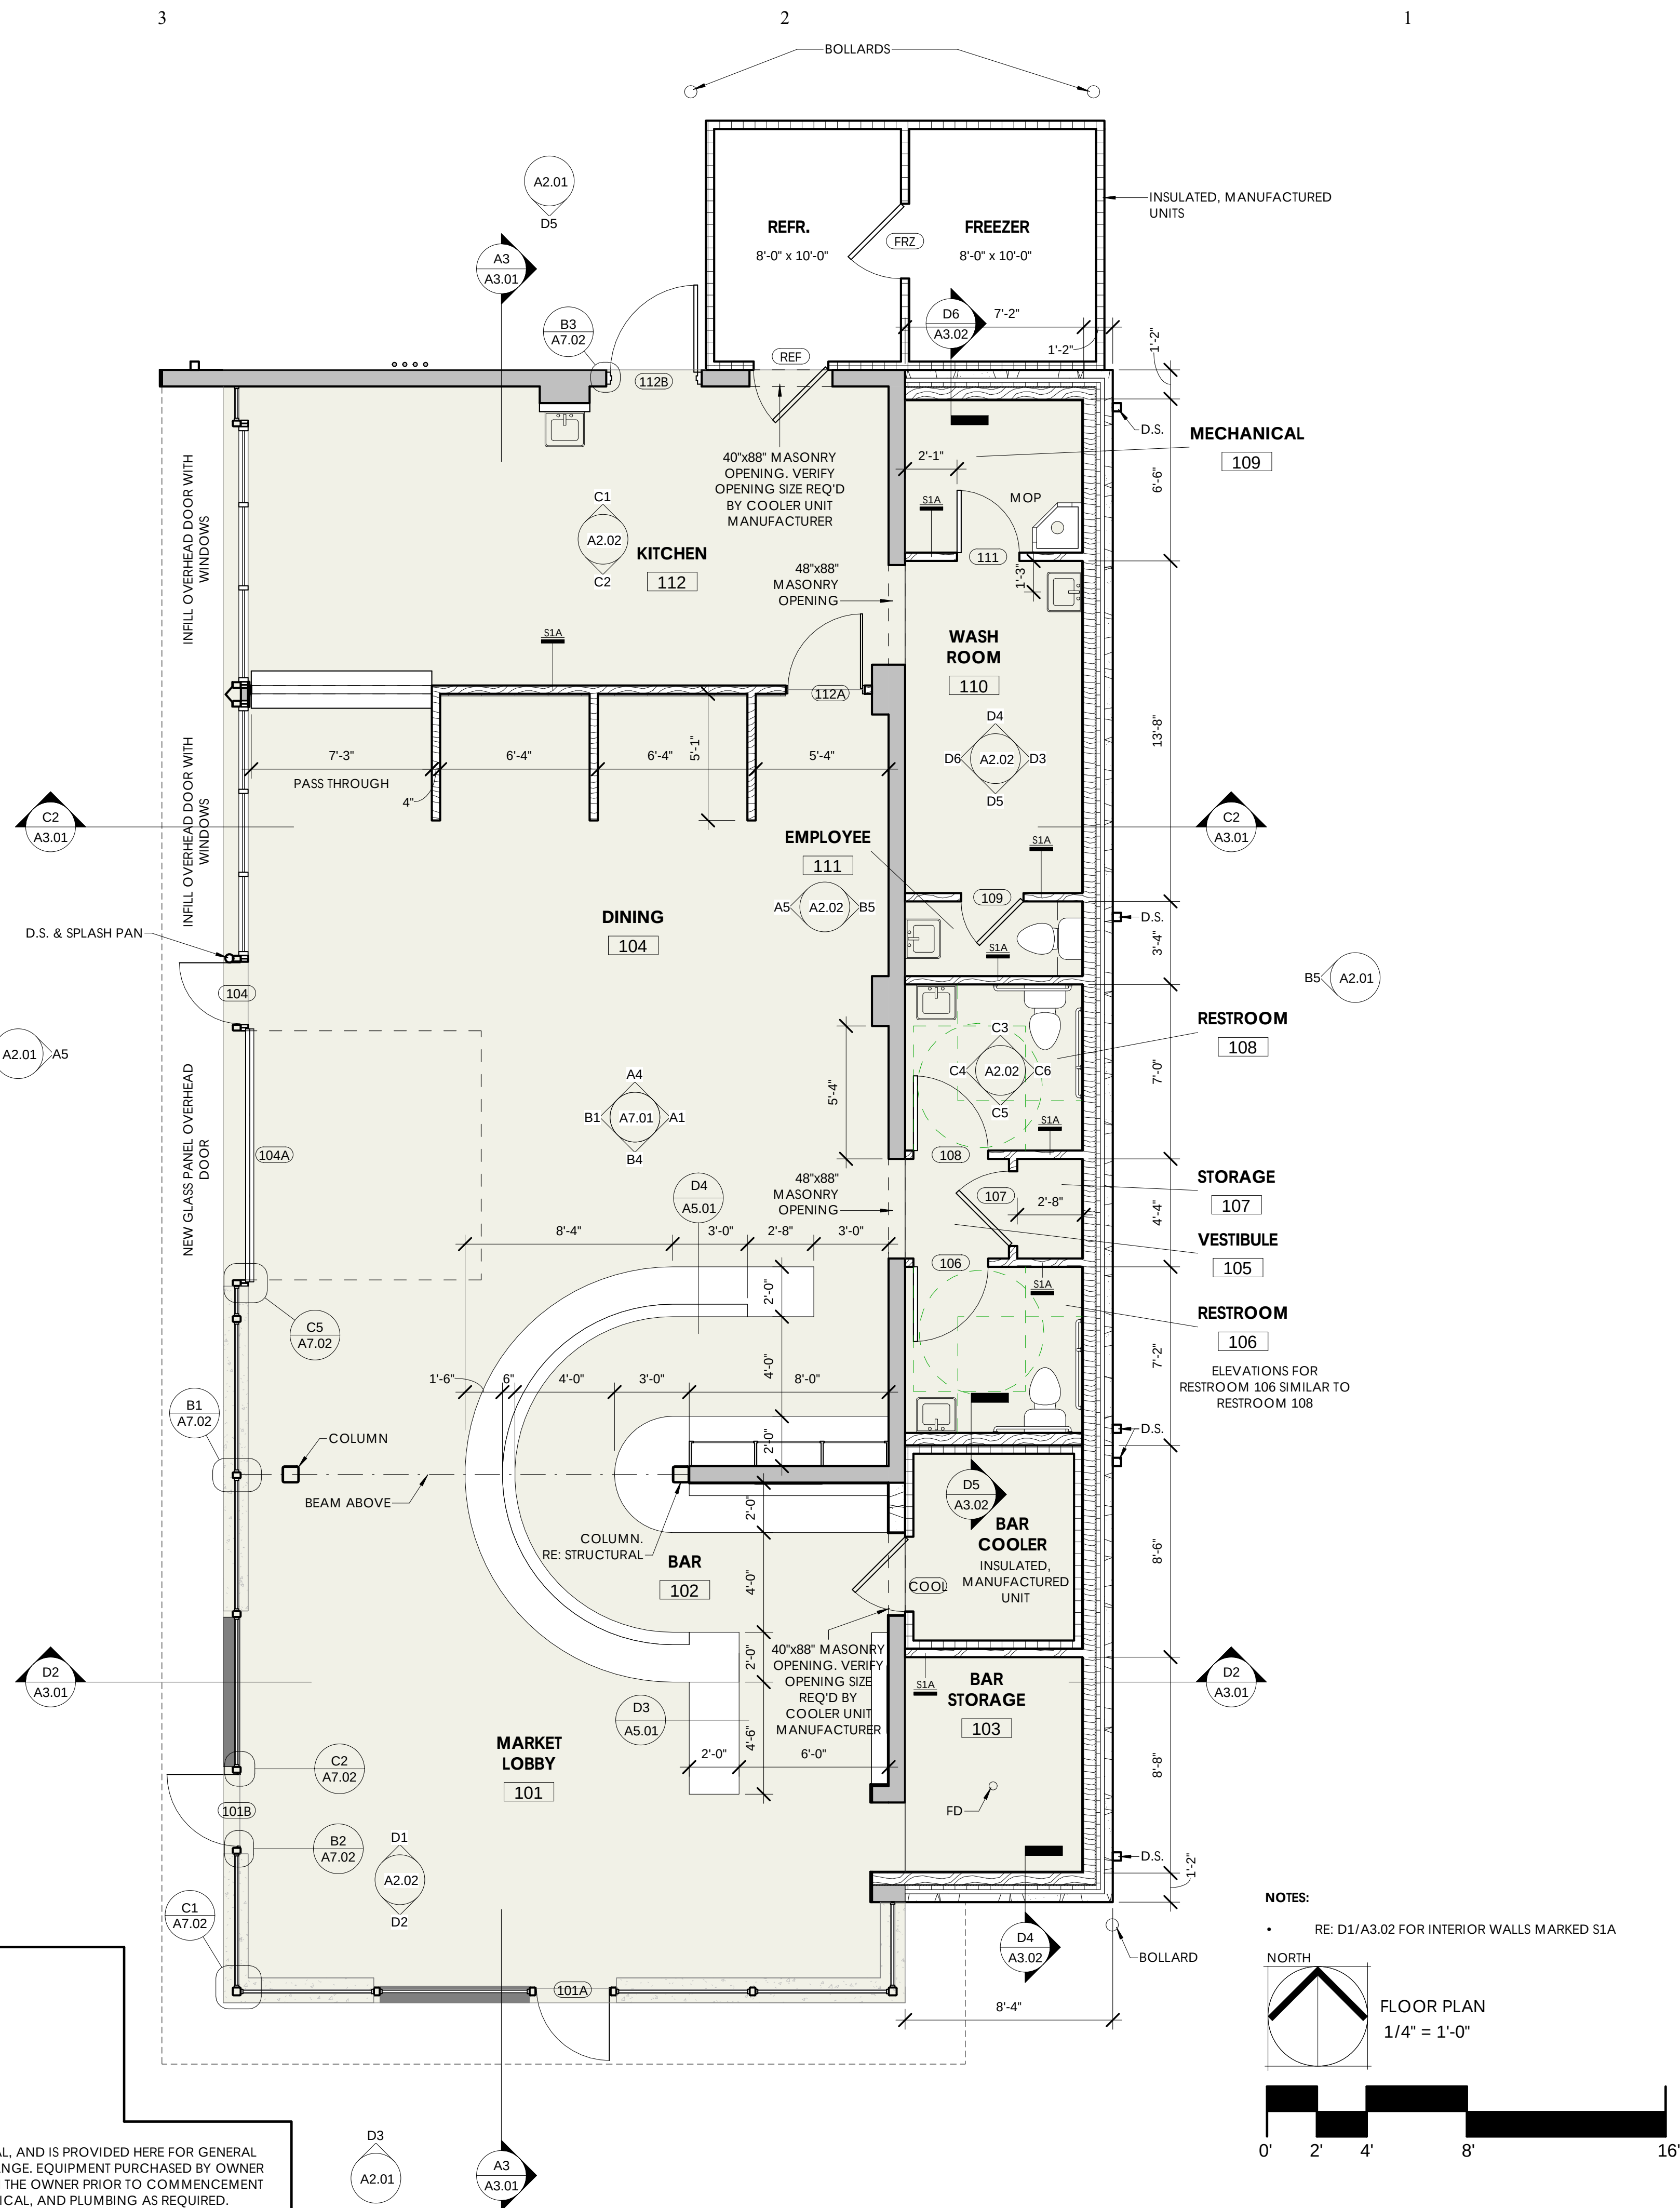


NOTES:

- RE: D1/A3.02 FOR INTERIOR WALLS MARKED S1A



FLOOR PLAN
1/4" = 1'-0"

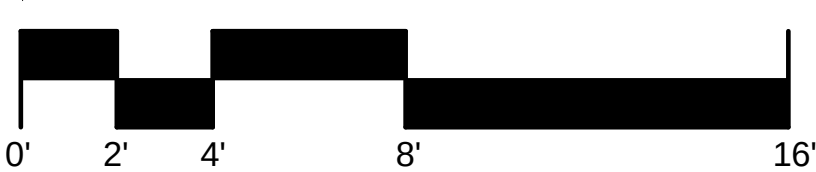

INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:



FLOOR PLAN

Sheet:


A1.02

Of:

1. VERIFY CONDITION OF EXISTING ROOF
2. EXISTING CANOPIES CURRENTLY DRAIN ONTO EXISTING LOBBY ROOF. REVIEW ROOF CONDITIONS WITH ROOFING CONTRACTOR AND MAKE RECOMMENDATIONS TO OWNER AND ARCHITECT AS NEEDED.
3. INSTALL ROOF ANCHORS COMPLIANT WITH ANSI/ASSE Z350 FOR ROOF EQUIPMENT KEF, KMAU, RTU-1, RTU-2, AND EF-1. SEE ROOF ANCHOR DETAIL ON A5.01



INTERIOR LIGHT FIXTURES ARE BEING ACQUIRED BY THE OWNER. VERIFY FIXTURES, LOCATIONS, AND MOUNTING WITH THE OWNER. COORDINATE ALL CONNECTIONS, JUNCTION BOX LOCATIONS, AND CONDUIT ROUTING WITH THE OWNER. FIXTURES AND LOCATIONS SHOWN HERE ARE NOT FINAL AND ARE SHOWN FOR GENERAL REFERENCE ONLY.



REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number:	19013B
-----------------	---------------

Date: 5/25/2022

Project Name:

PARKSIDE RESTAURANT

Project Address:
**1026 POYNTZ AVE.
MANHATTAN, KS 66502**




Sheet Title:


CEILING & ROOF PLANS

Sheet

A1.03

Of

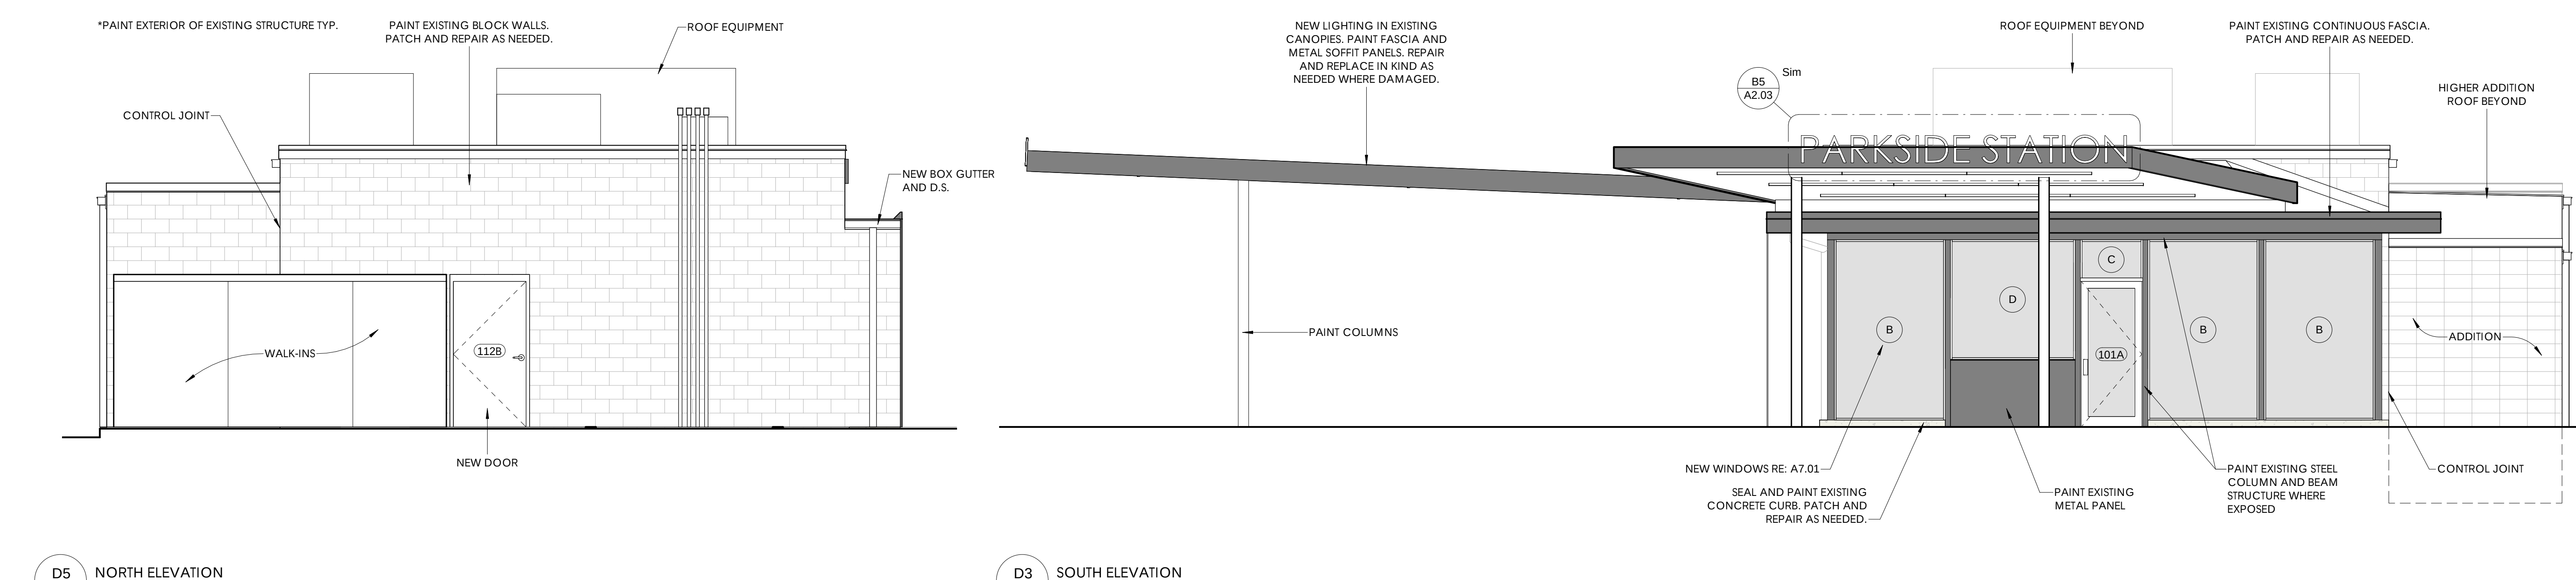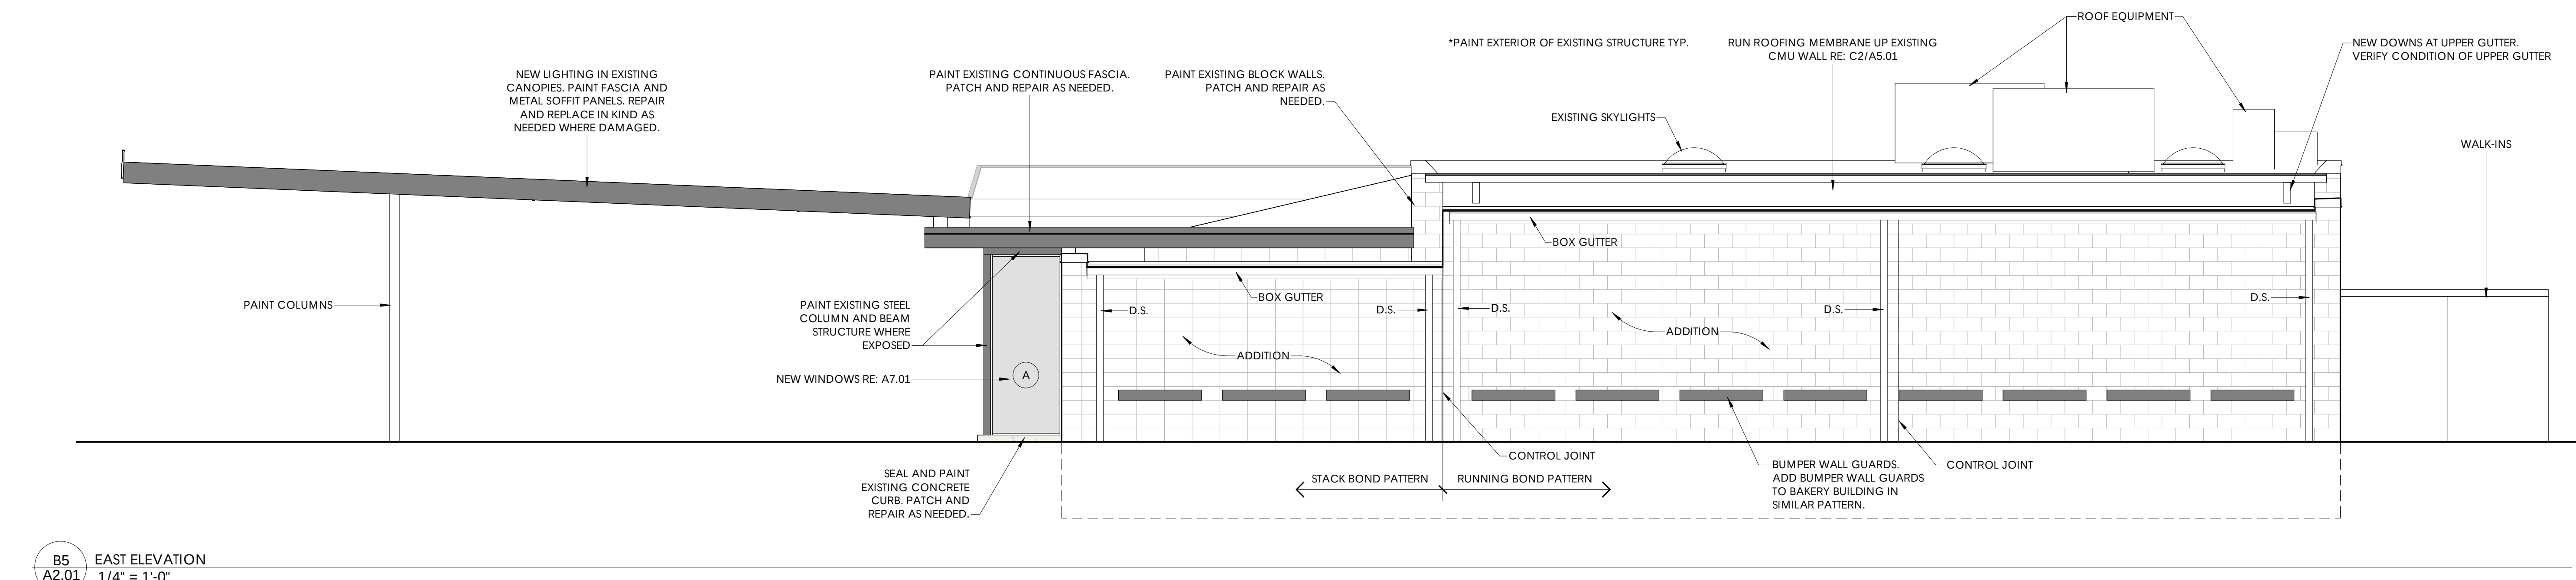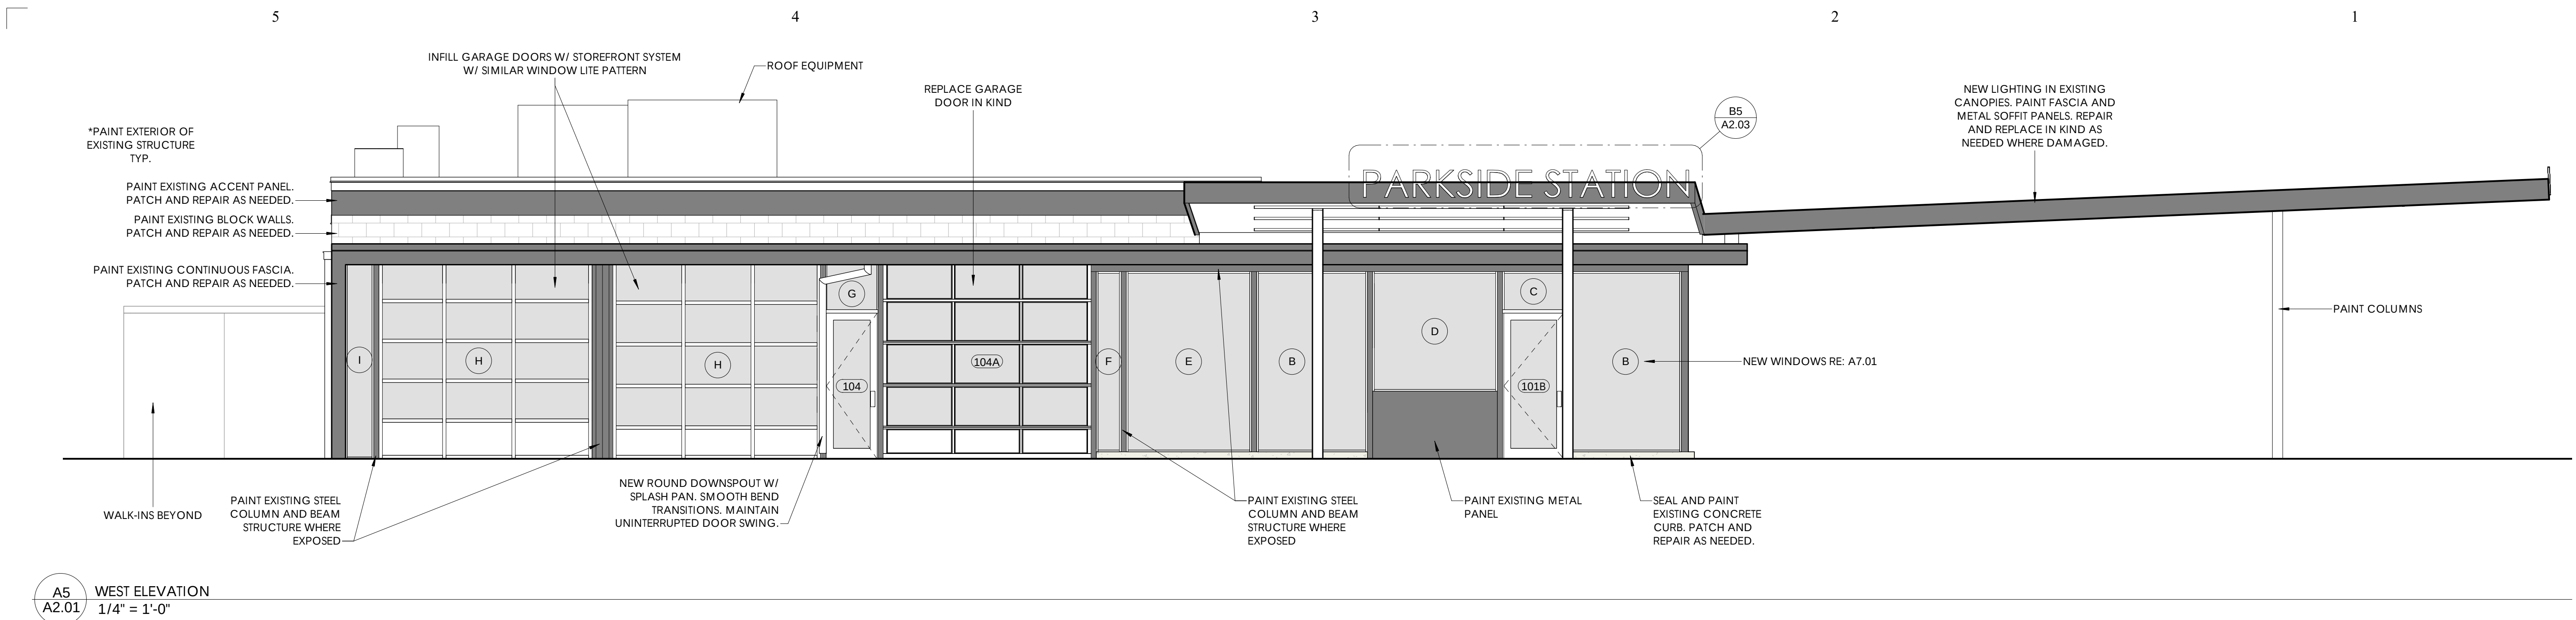

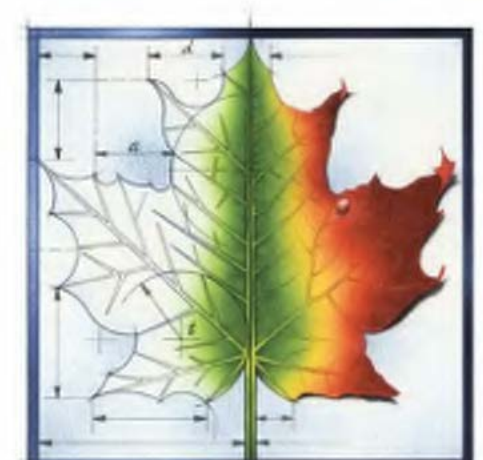

INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
BID SET		

Project Number: **19013B**

Date: **5/25/2022**






















Project Name: **PARKSIDE RESTAURANT**

Project Address: **1026 POYNTZ AVE. MANHATTAN, KS 66502**

Sheet Title: **ELEVATIONS**

Sheet: **A2.01**

Of:

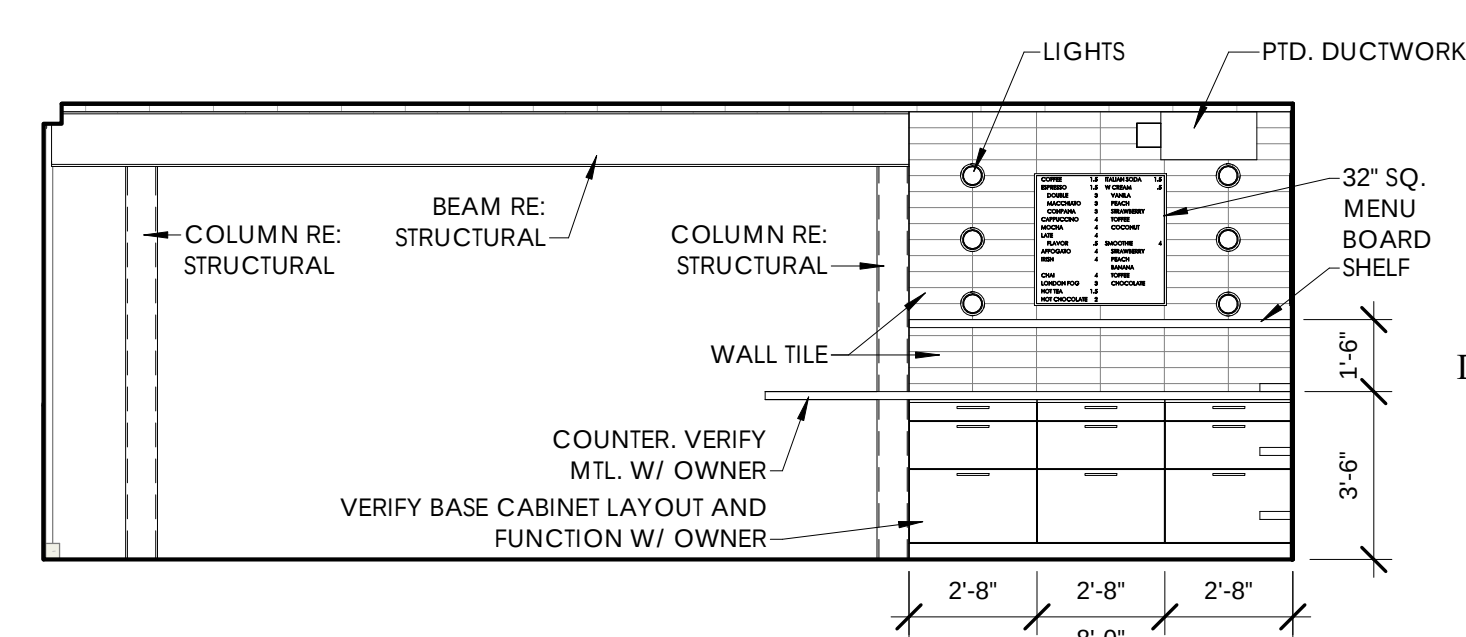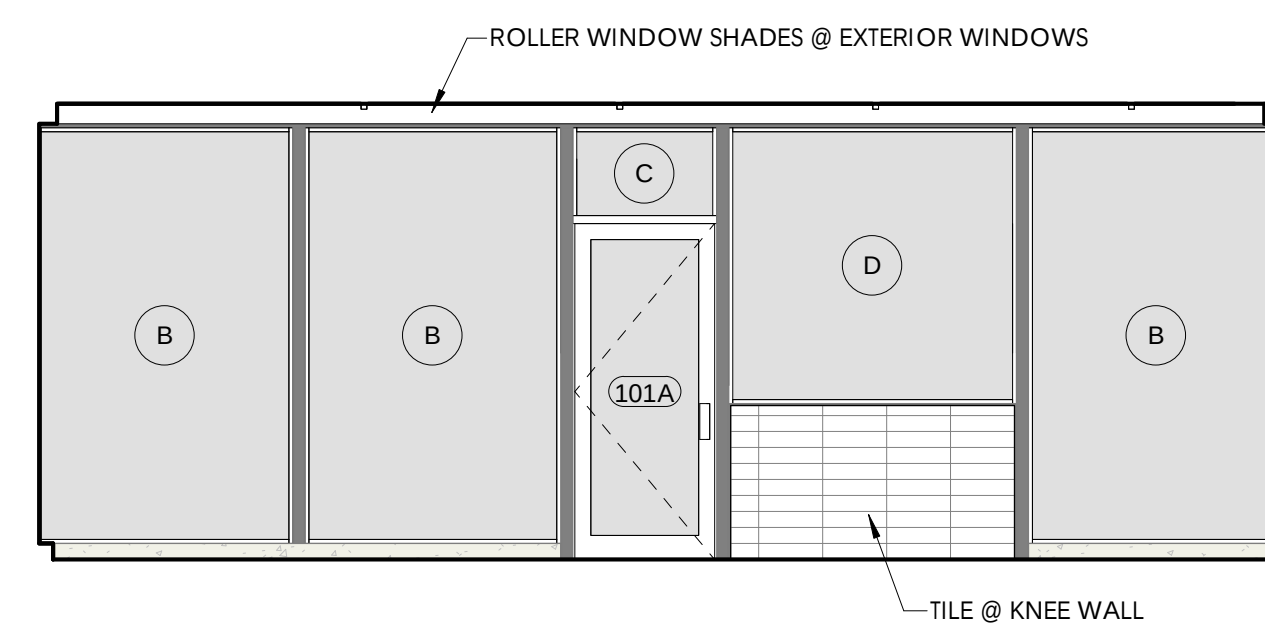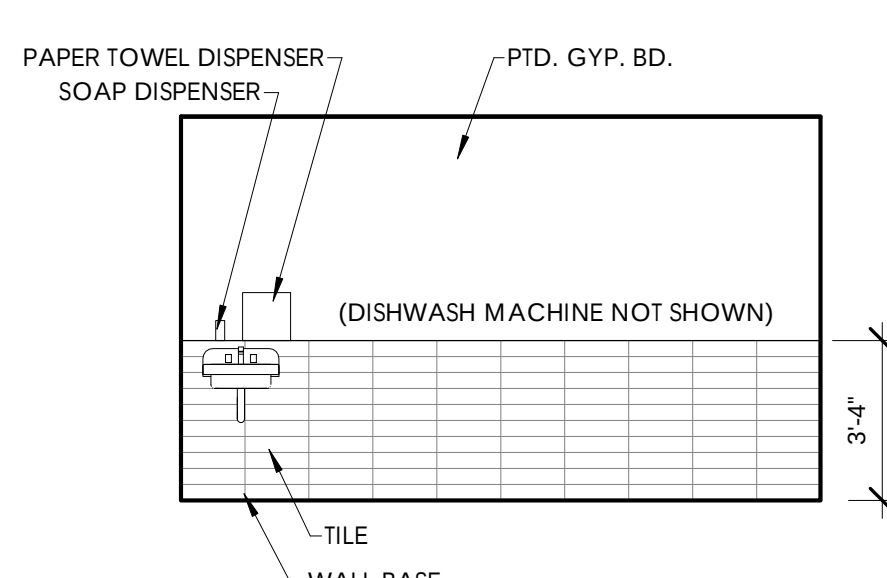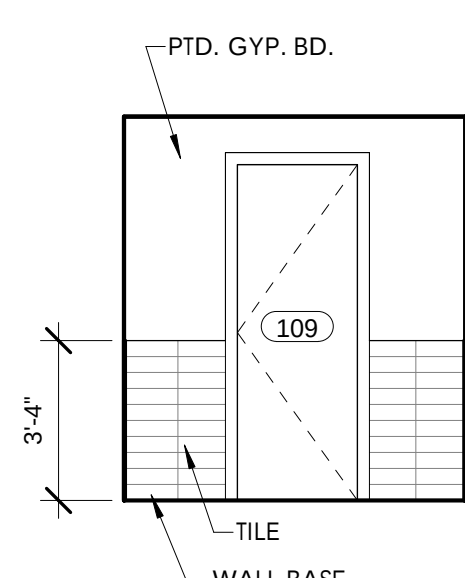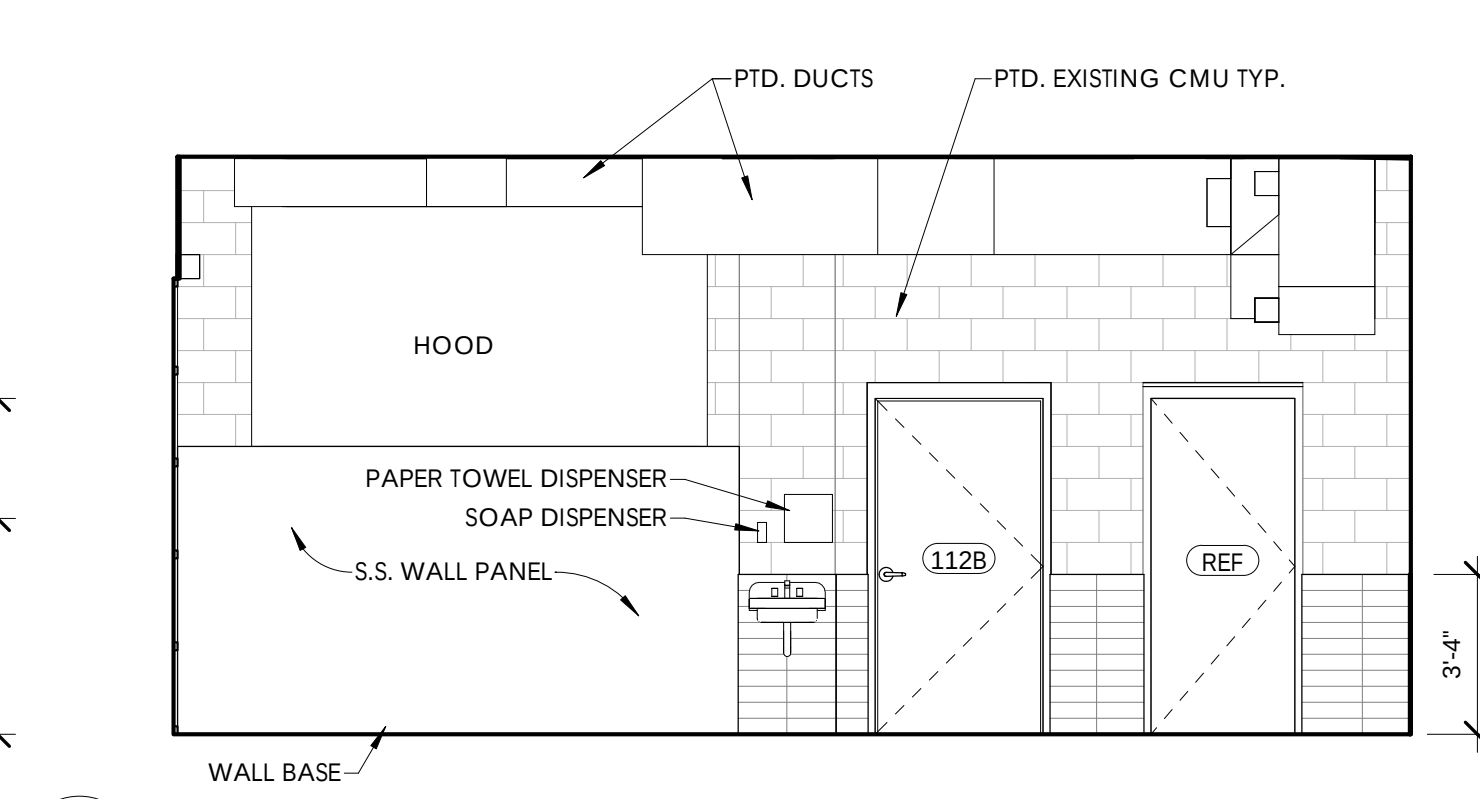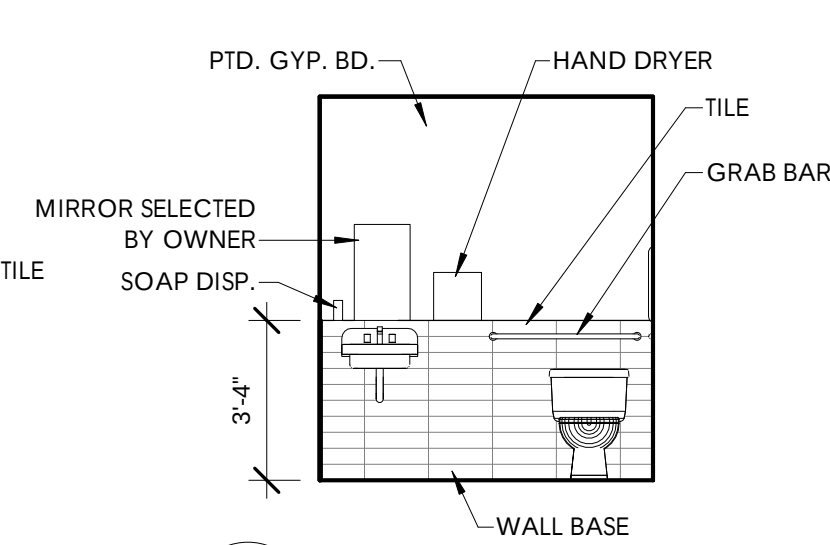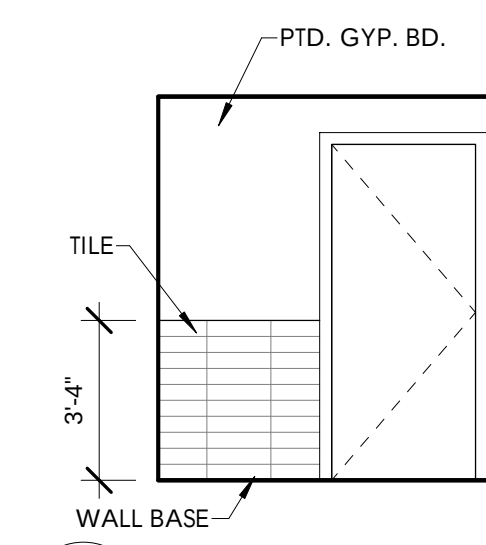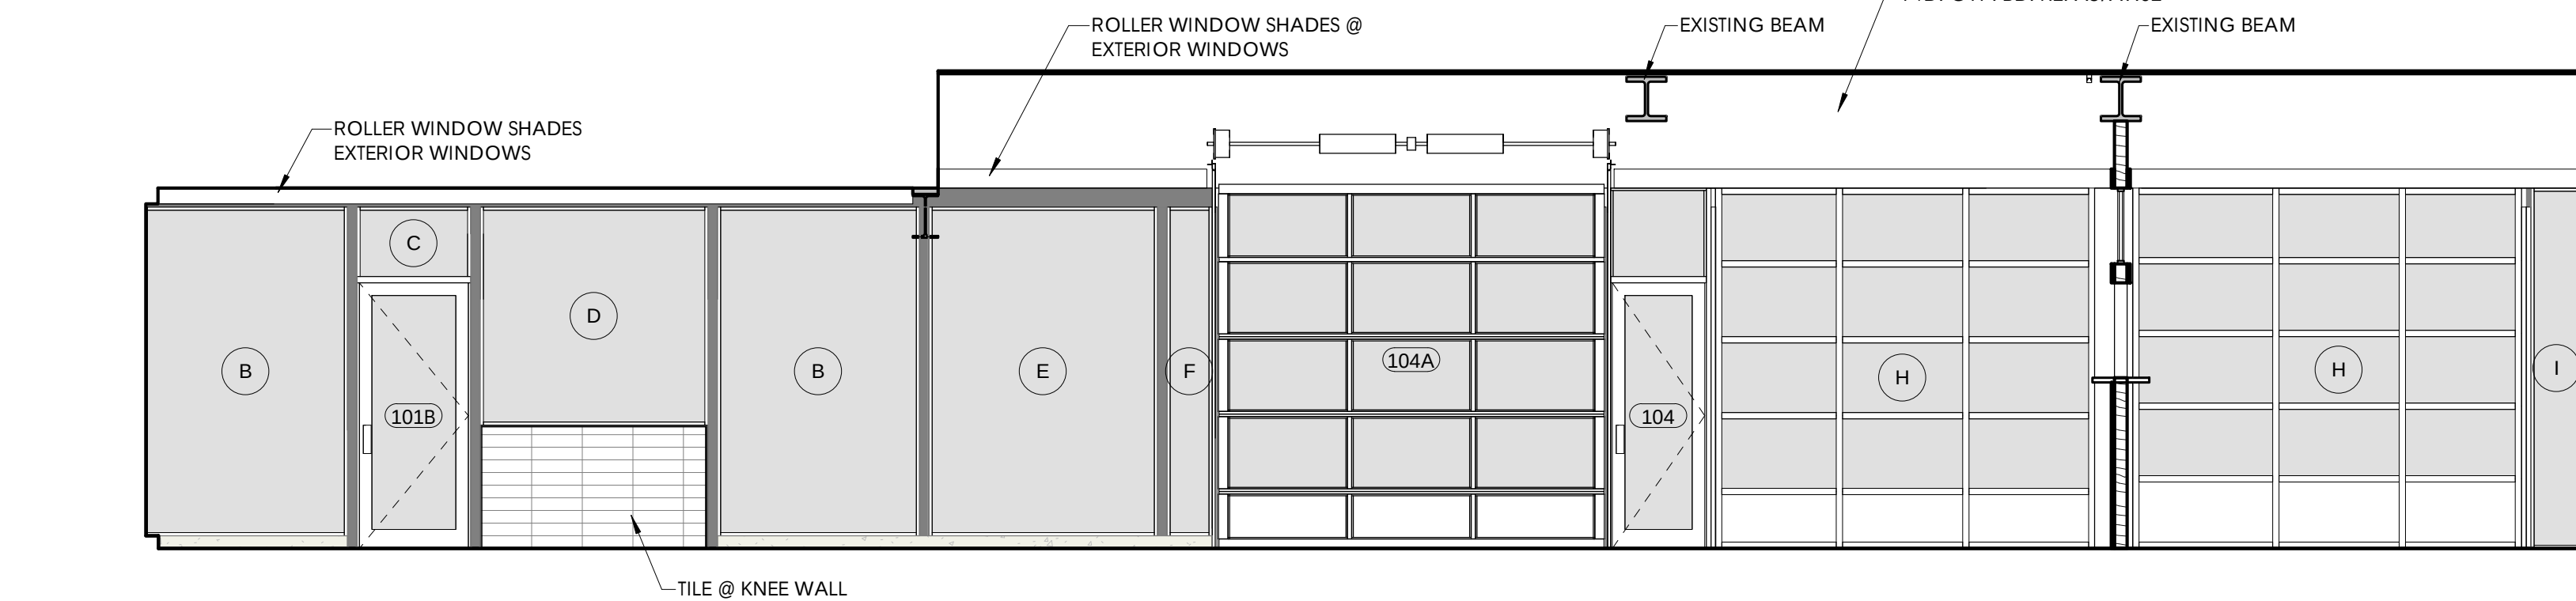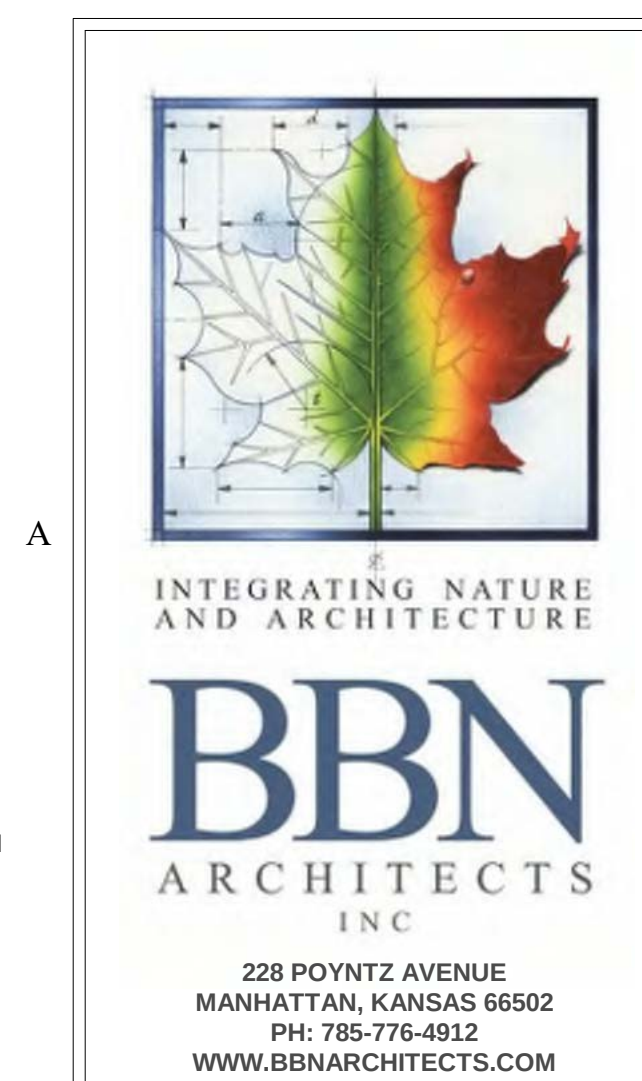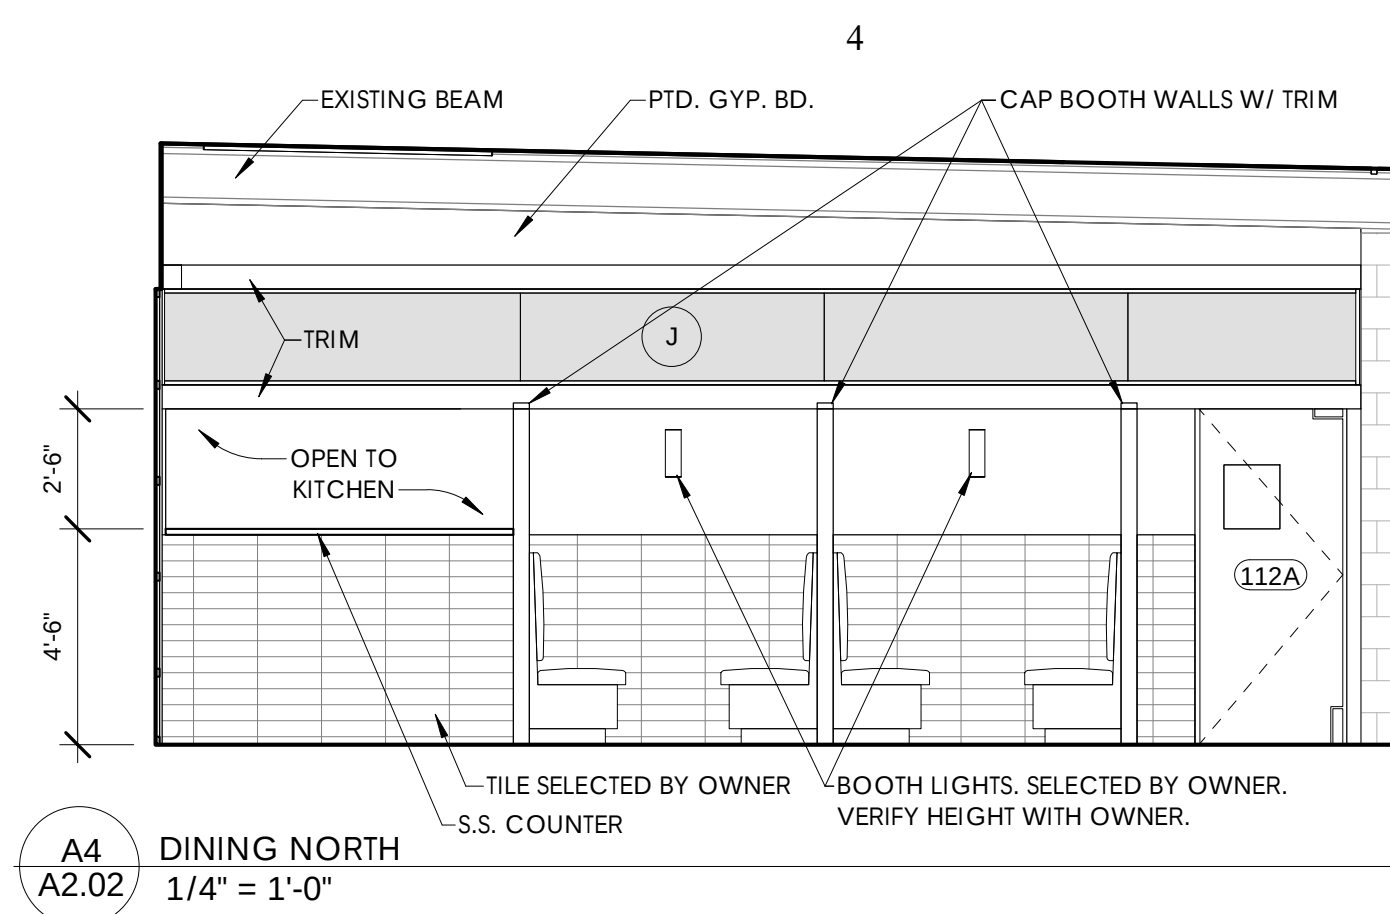

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013E

Date: 5/25/2022

Project Name:

PARKSIDE RESTAURANT

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502


Sheet Title:

INTERIOR ELEVATIONS


Sheet

A2.02


Of:

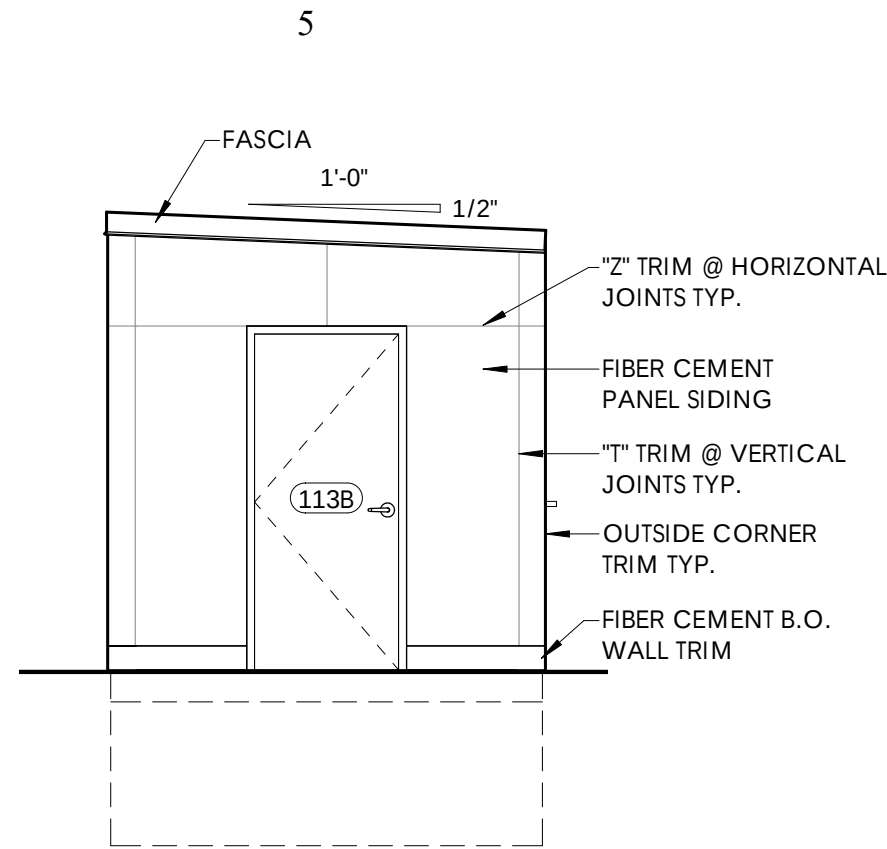


A5
A2.03
PATIO BAR SOUTH
1/4" = 1'-0"

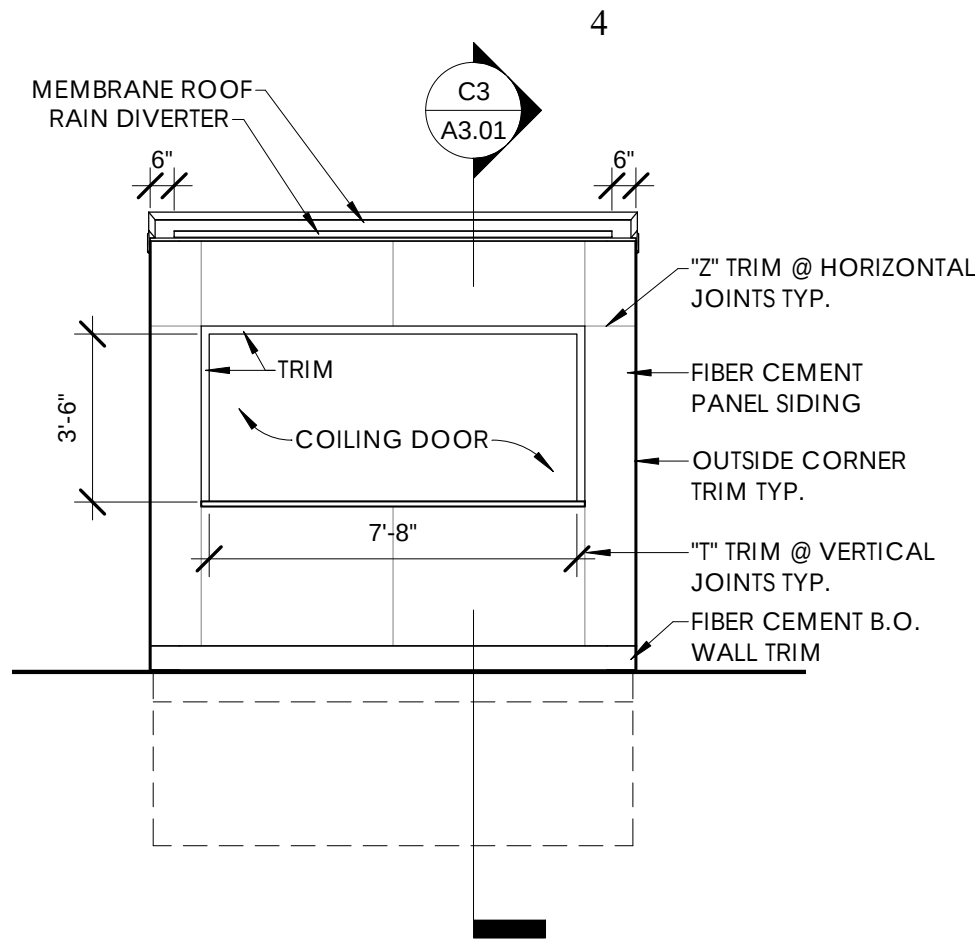


A4
A2.03
PATIO BAR EAST
1/4" = 1'-0"

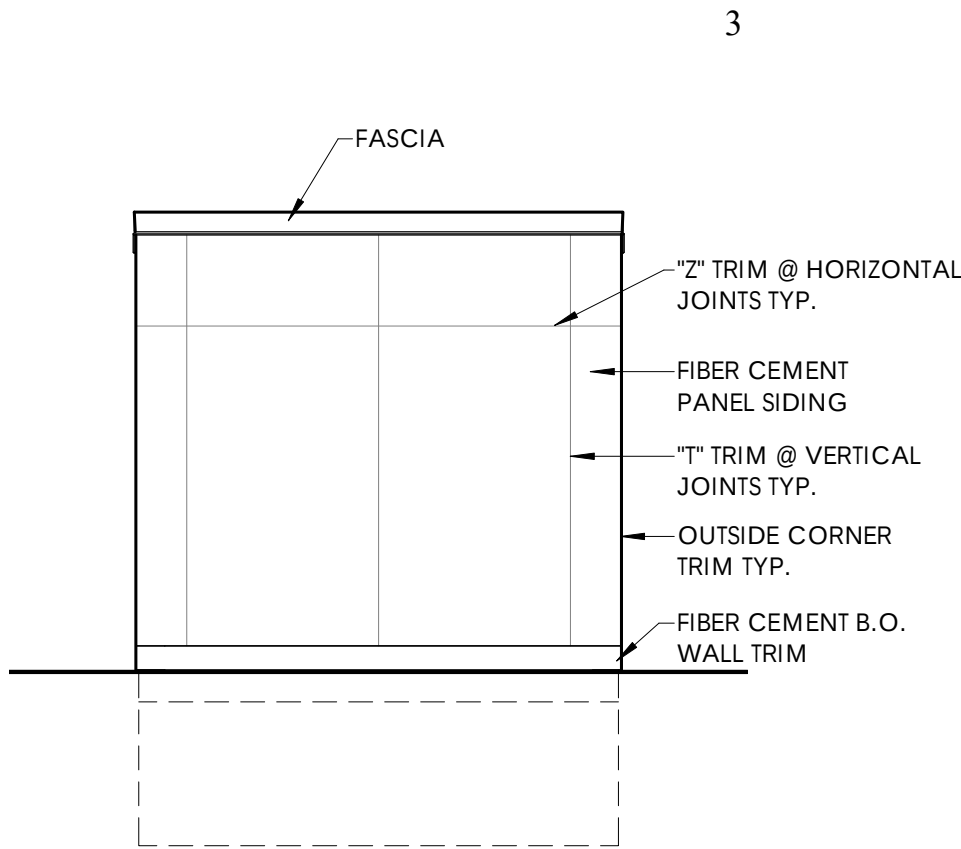


A3
A2.03
PATIO BAR WEST
1/4" = 1'-0"

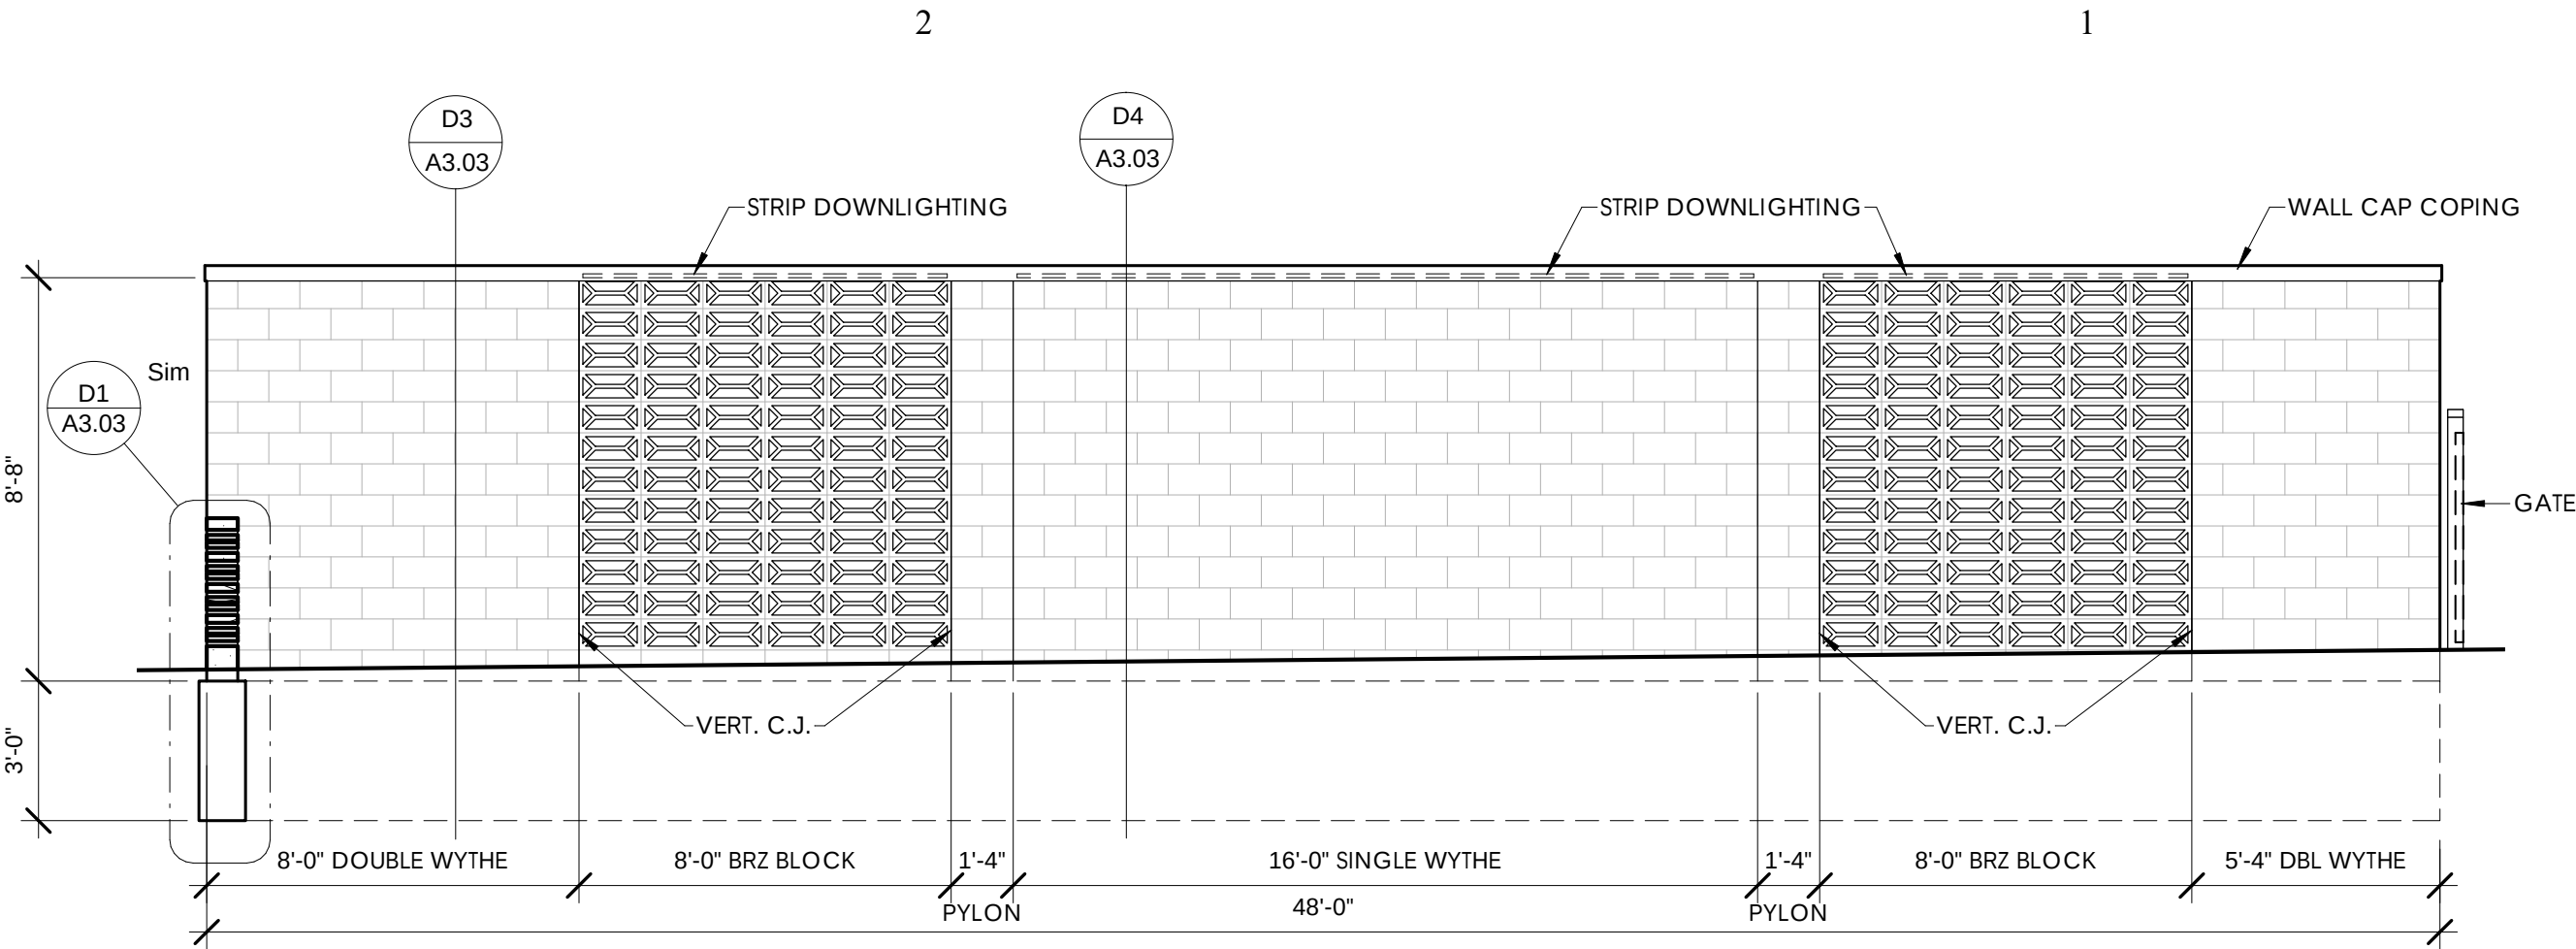


A2
A2.03
NORTH WALL
1/4" = 1'-0"

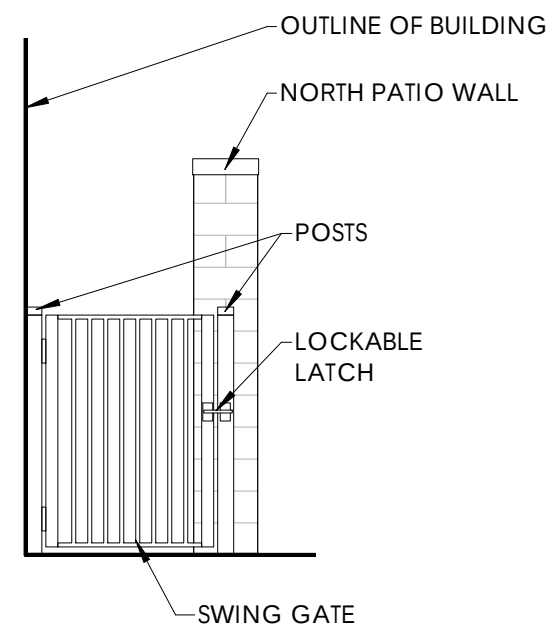


B3
A2.03
GATE
1/4" = 1'-0"

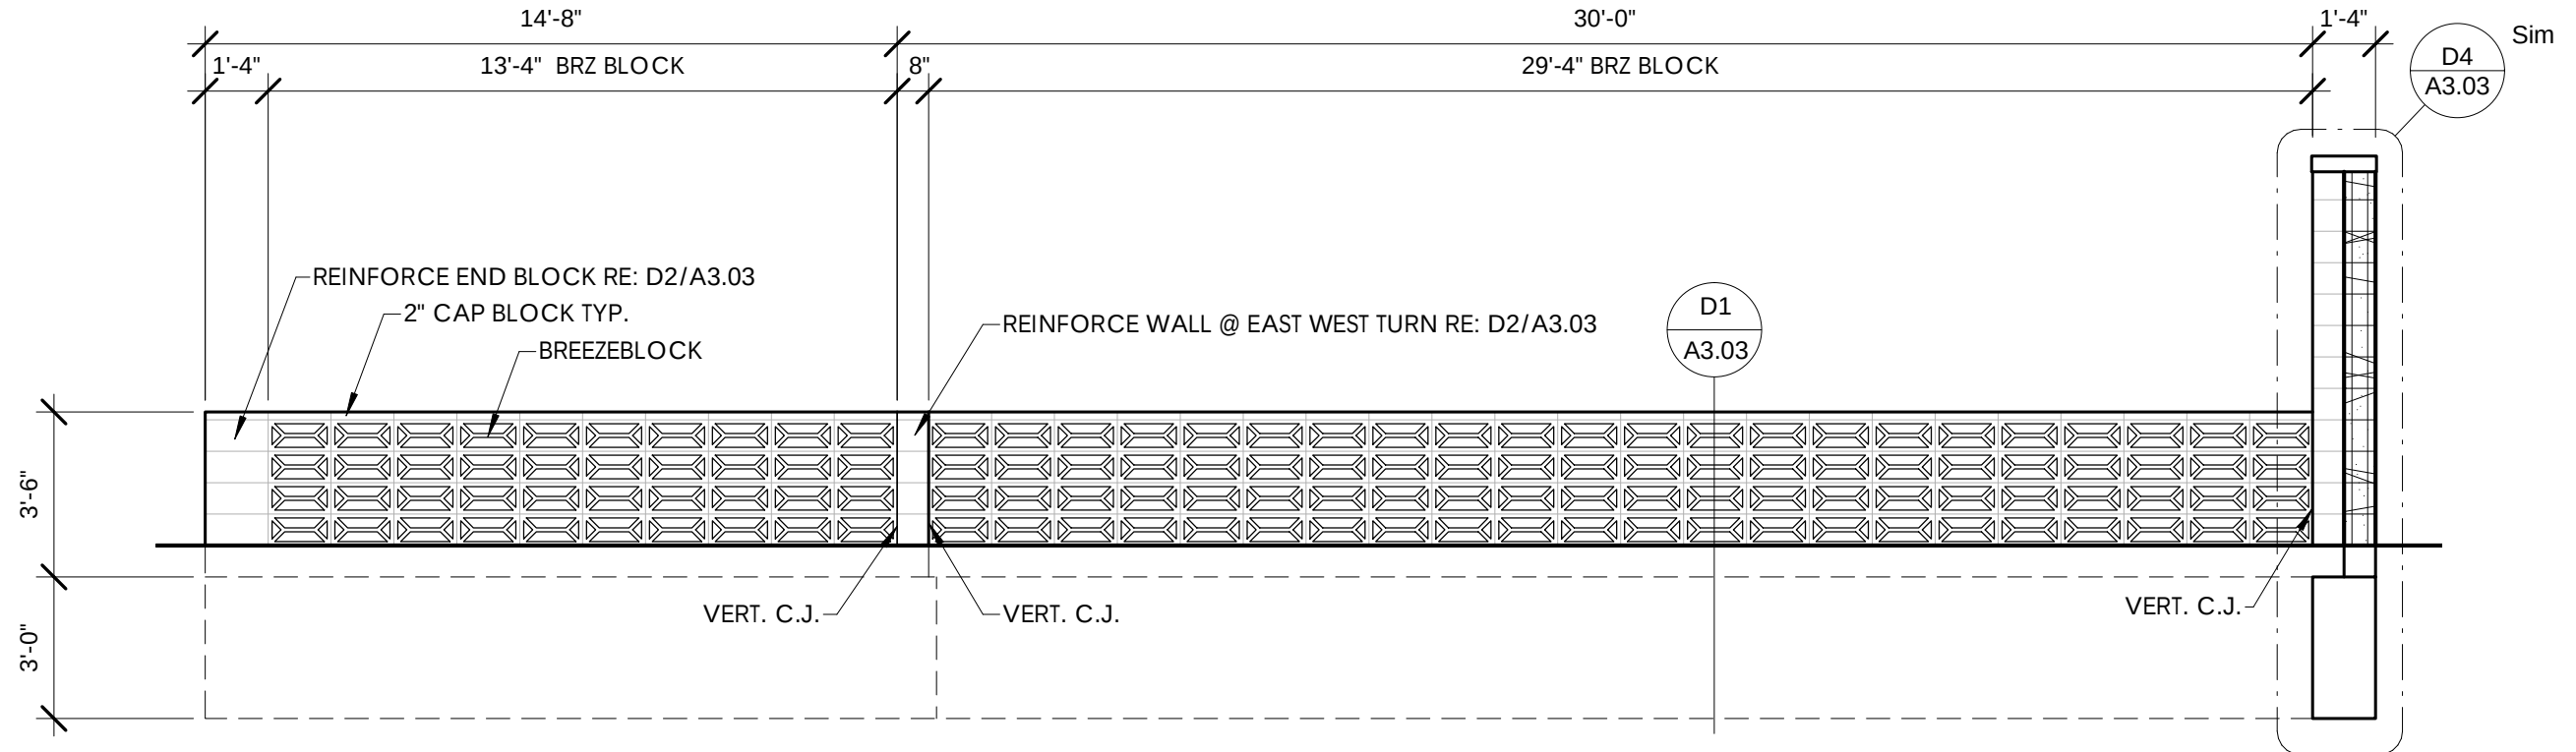


B2
A2.03
PLANTER A EAST
1/4" = 1'-0"

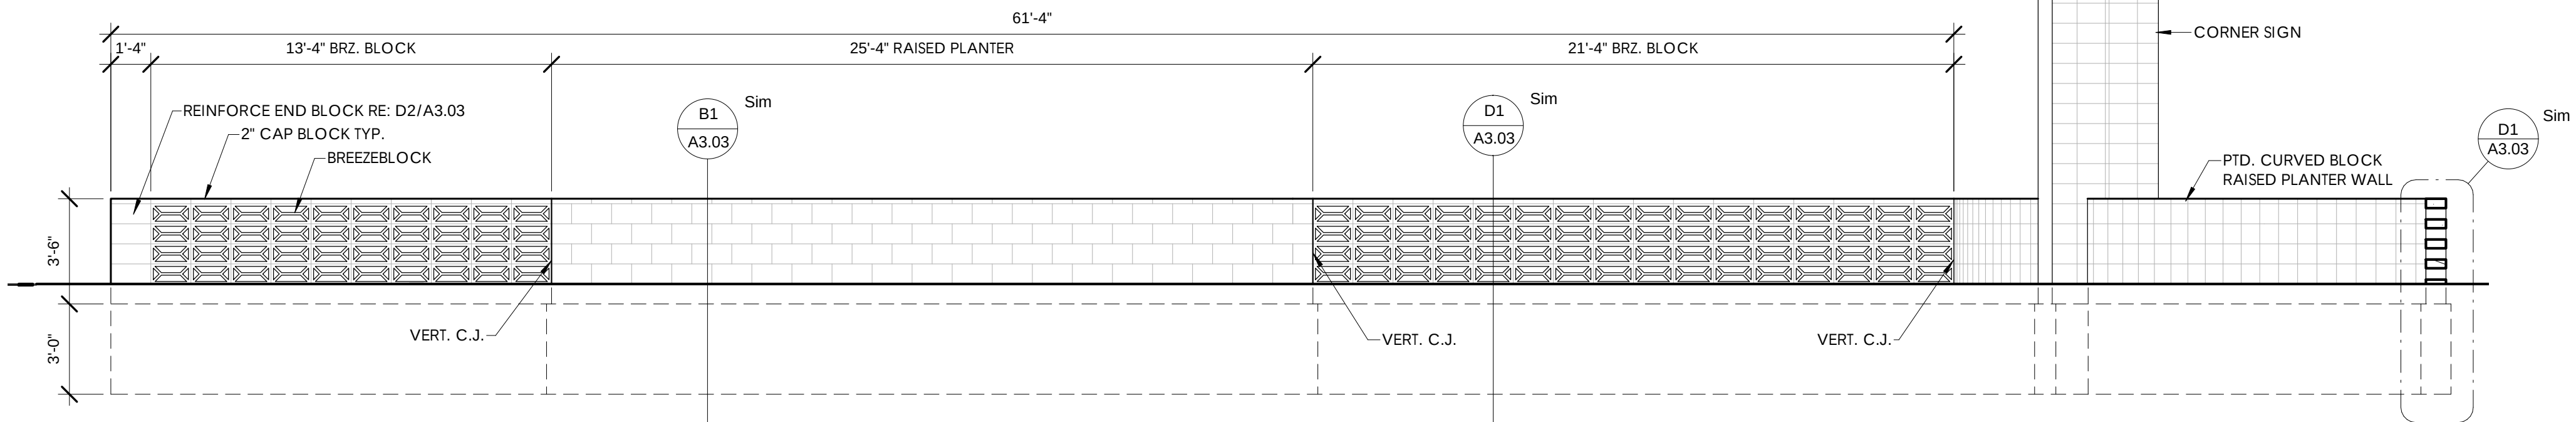

C3
A2.03
PLANTER B NORTH
1/4" = 1'-0"

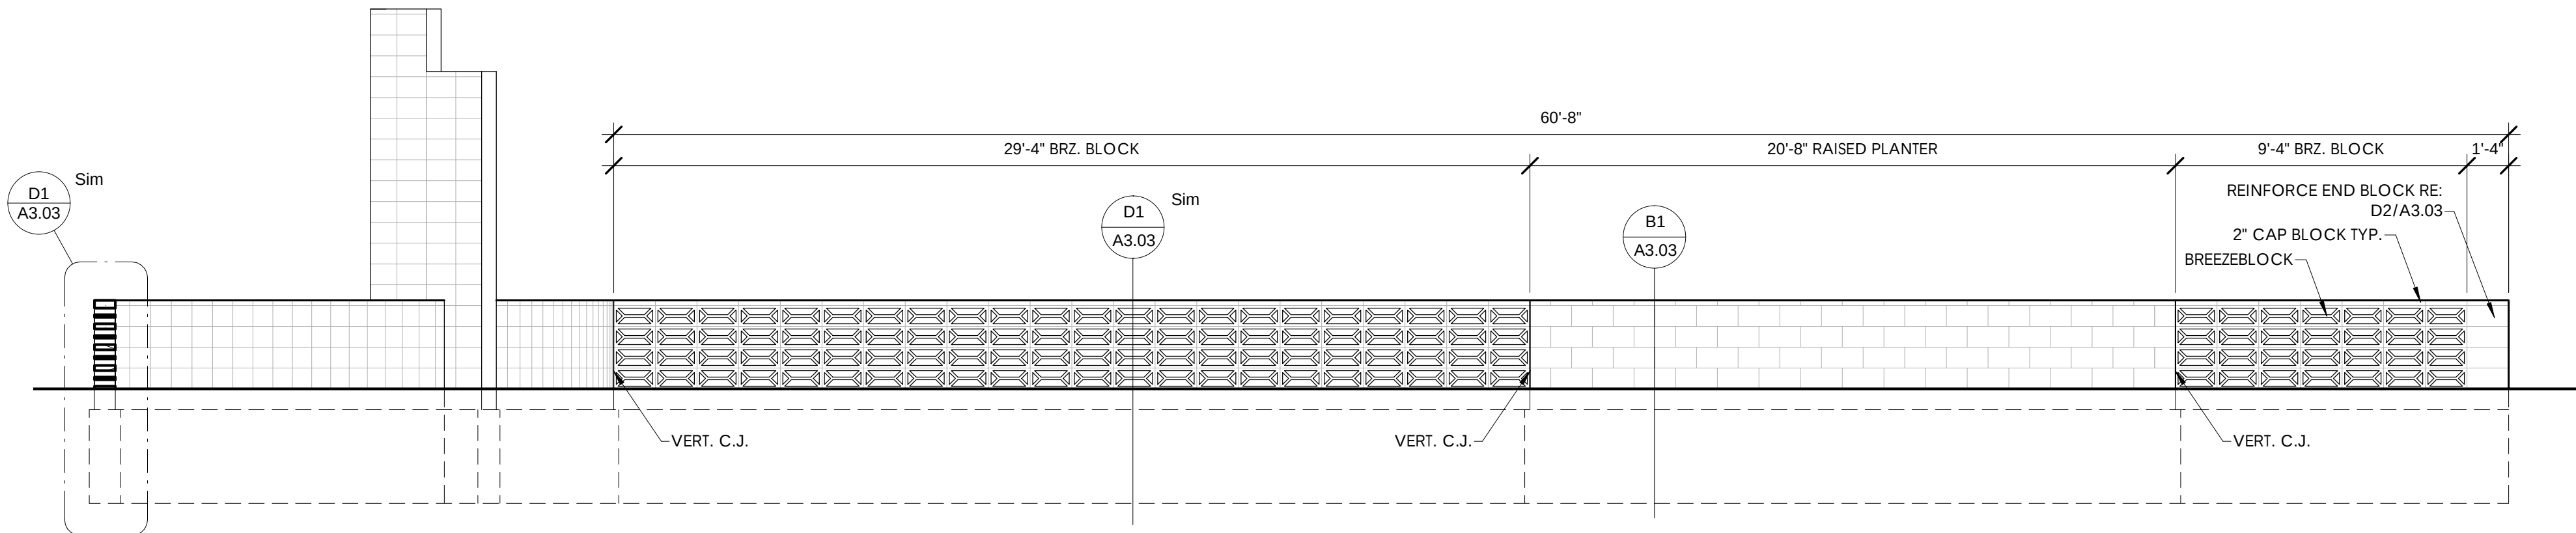

D3
A2.03
PLANTER B EAST
1/4" = 1'-0"

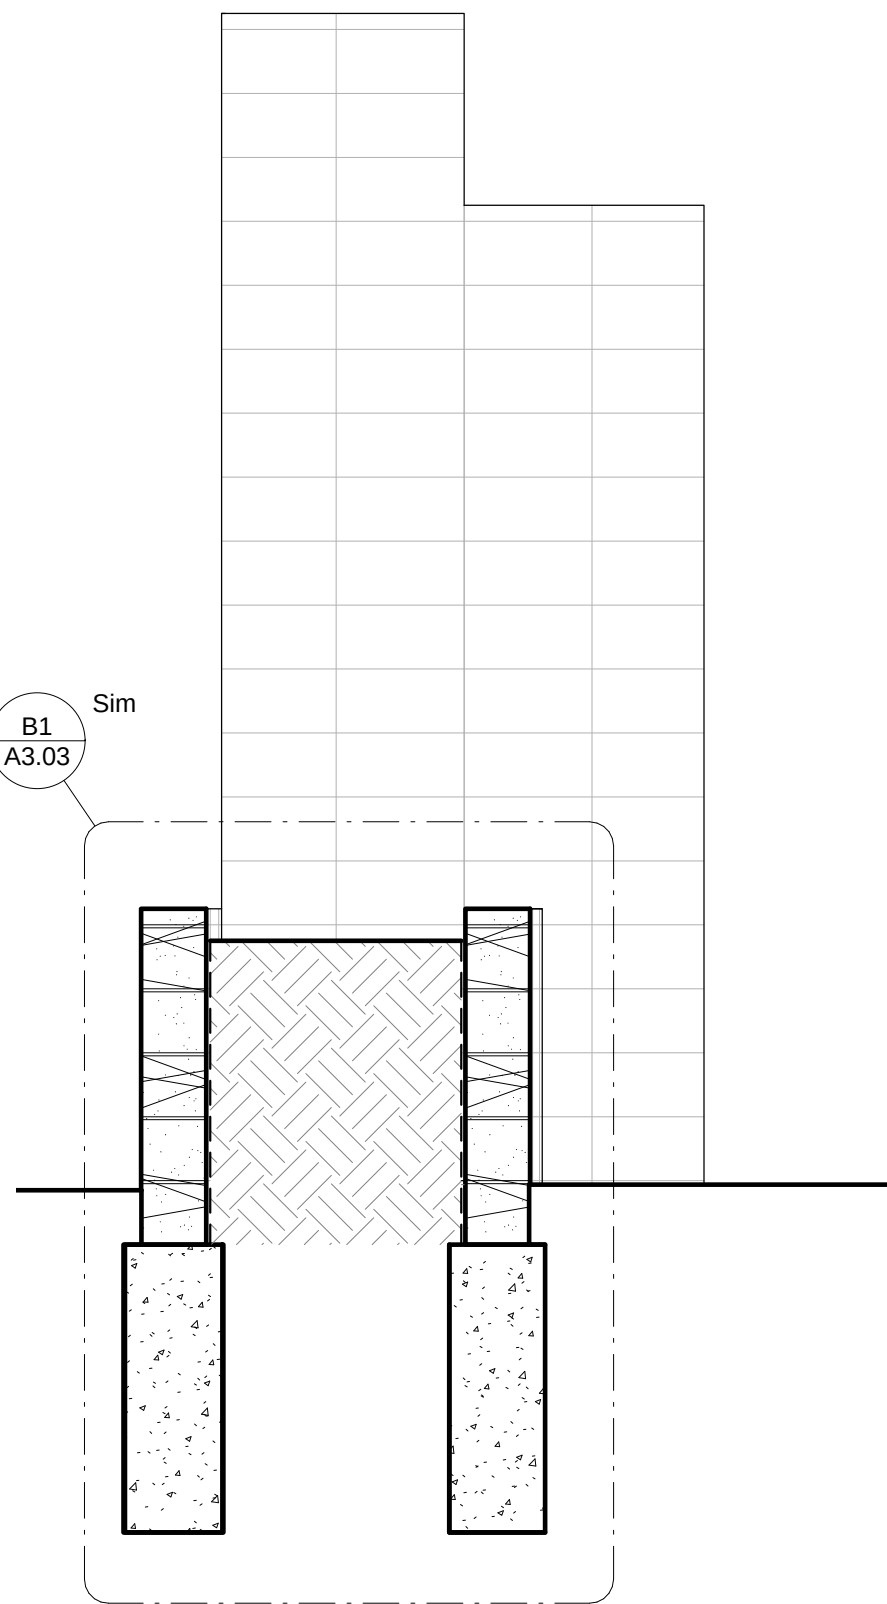

D5
A2.03
CORNER SIGN
1/2" = 1'-0"


***BRANDING NOTE:
THE OWNER IS IN THE PROCESS OF DEVELOPING THEIR BRANDING.
PLEASE INCLUDE AN ALLOWANCE FOR THE CORNER AND CANOPY
SIGNS UNTIL SUCH TIME THAT THIS BRANDING PROCESS IS COMPLETE.

WHEN COMPLETED, THESE SIGNS WILL NEED TO BE APPROVED THROUGH
THE CITY'S SIGN PERMIT PROCESS.

INTERNALLY ILLUMINATED LETTERS MOUNTED TO EXISTING CANOPY. 16" HEIGHT +/-

PARKSIDE STATION

B5
A2.03
CANOPY SIGN
1/2" = 1'-0"

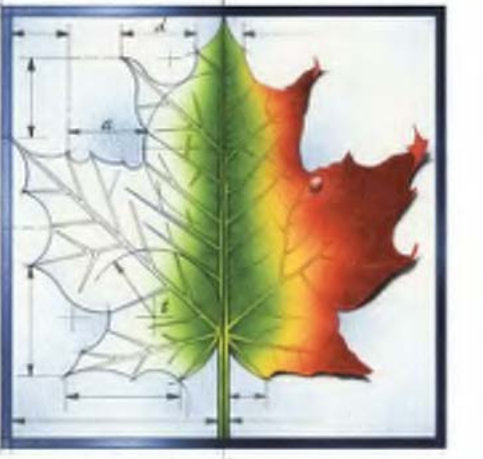

INTEGRATING NATURE
AND ARCHITECTURE
BBN
ARCHITECTS
INC.
228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:



**PARKSIDE
RESTAURANT**

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:
**ELEVATIONS
OF SITE
FEATURES**

Sheet:
A2.03

Of:

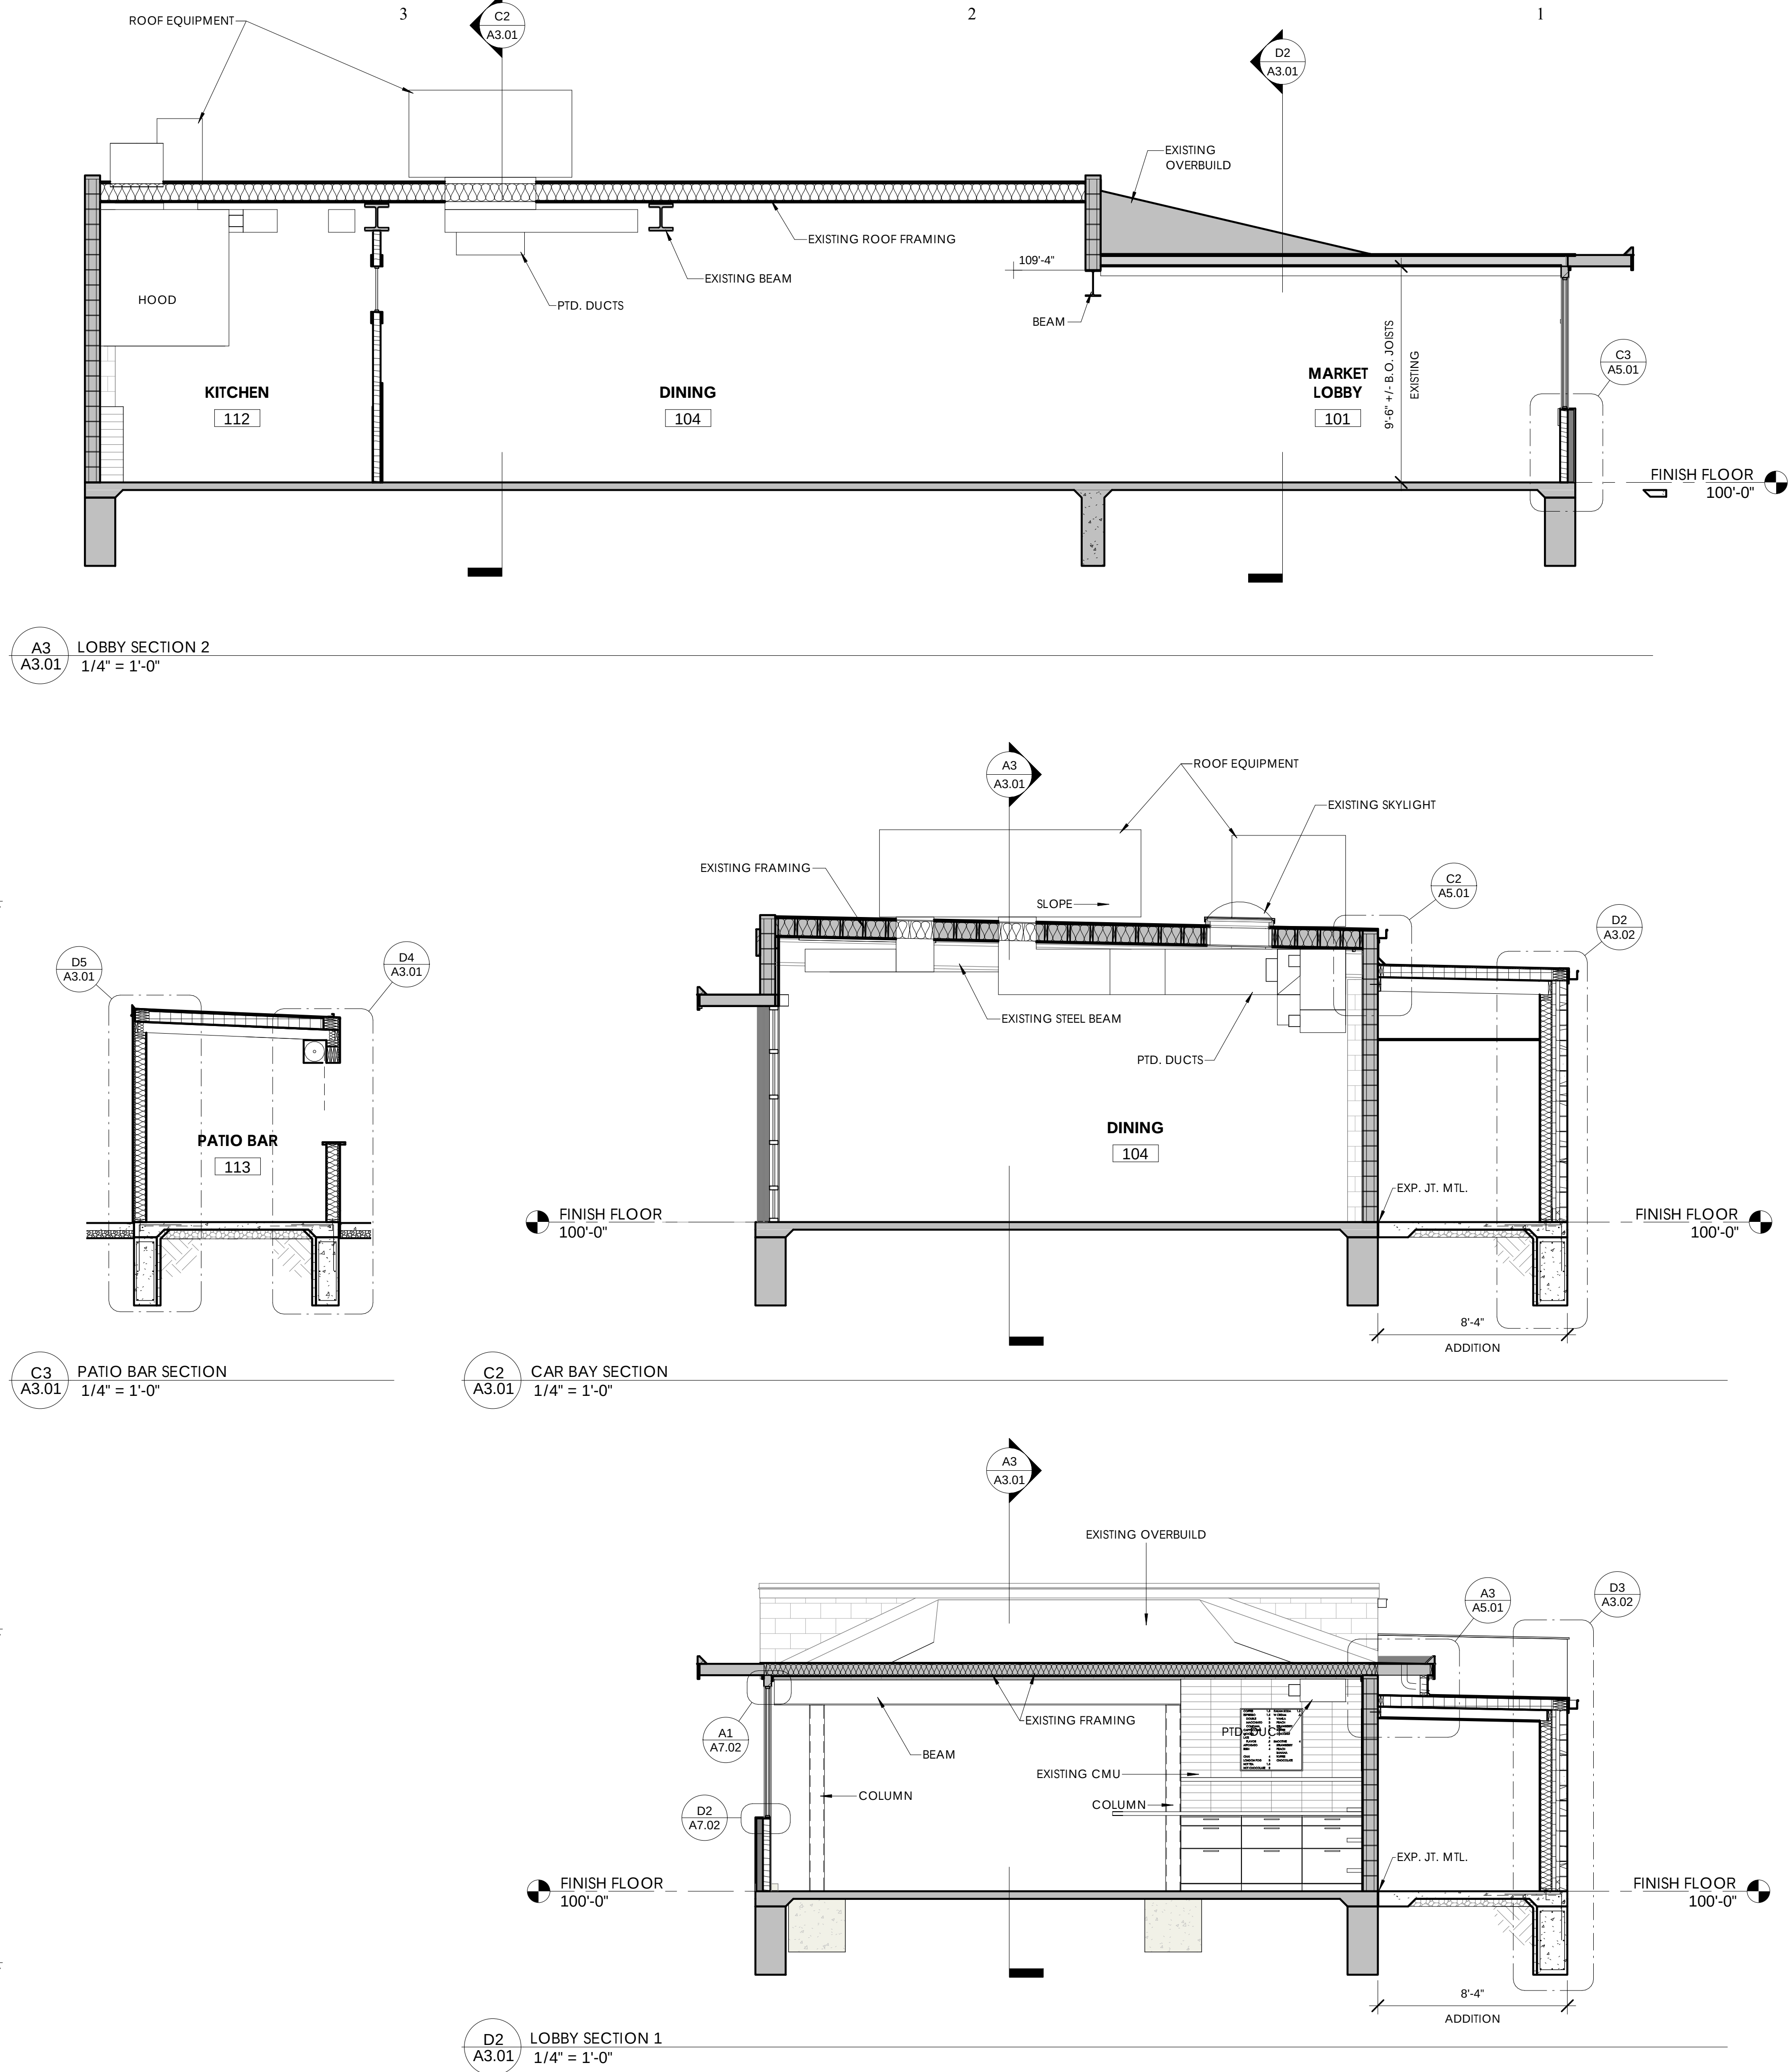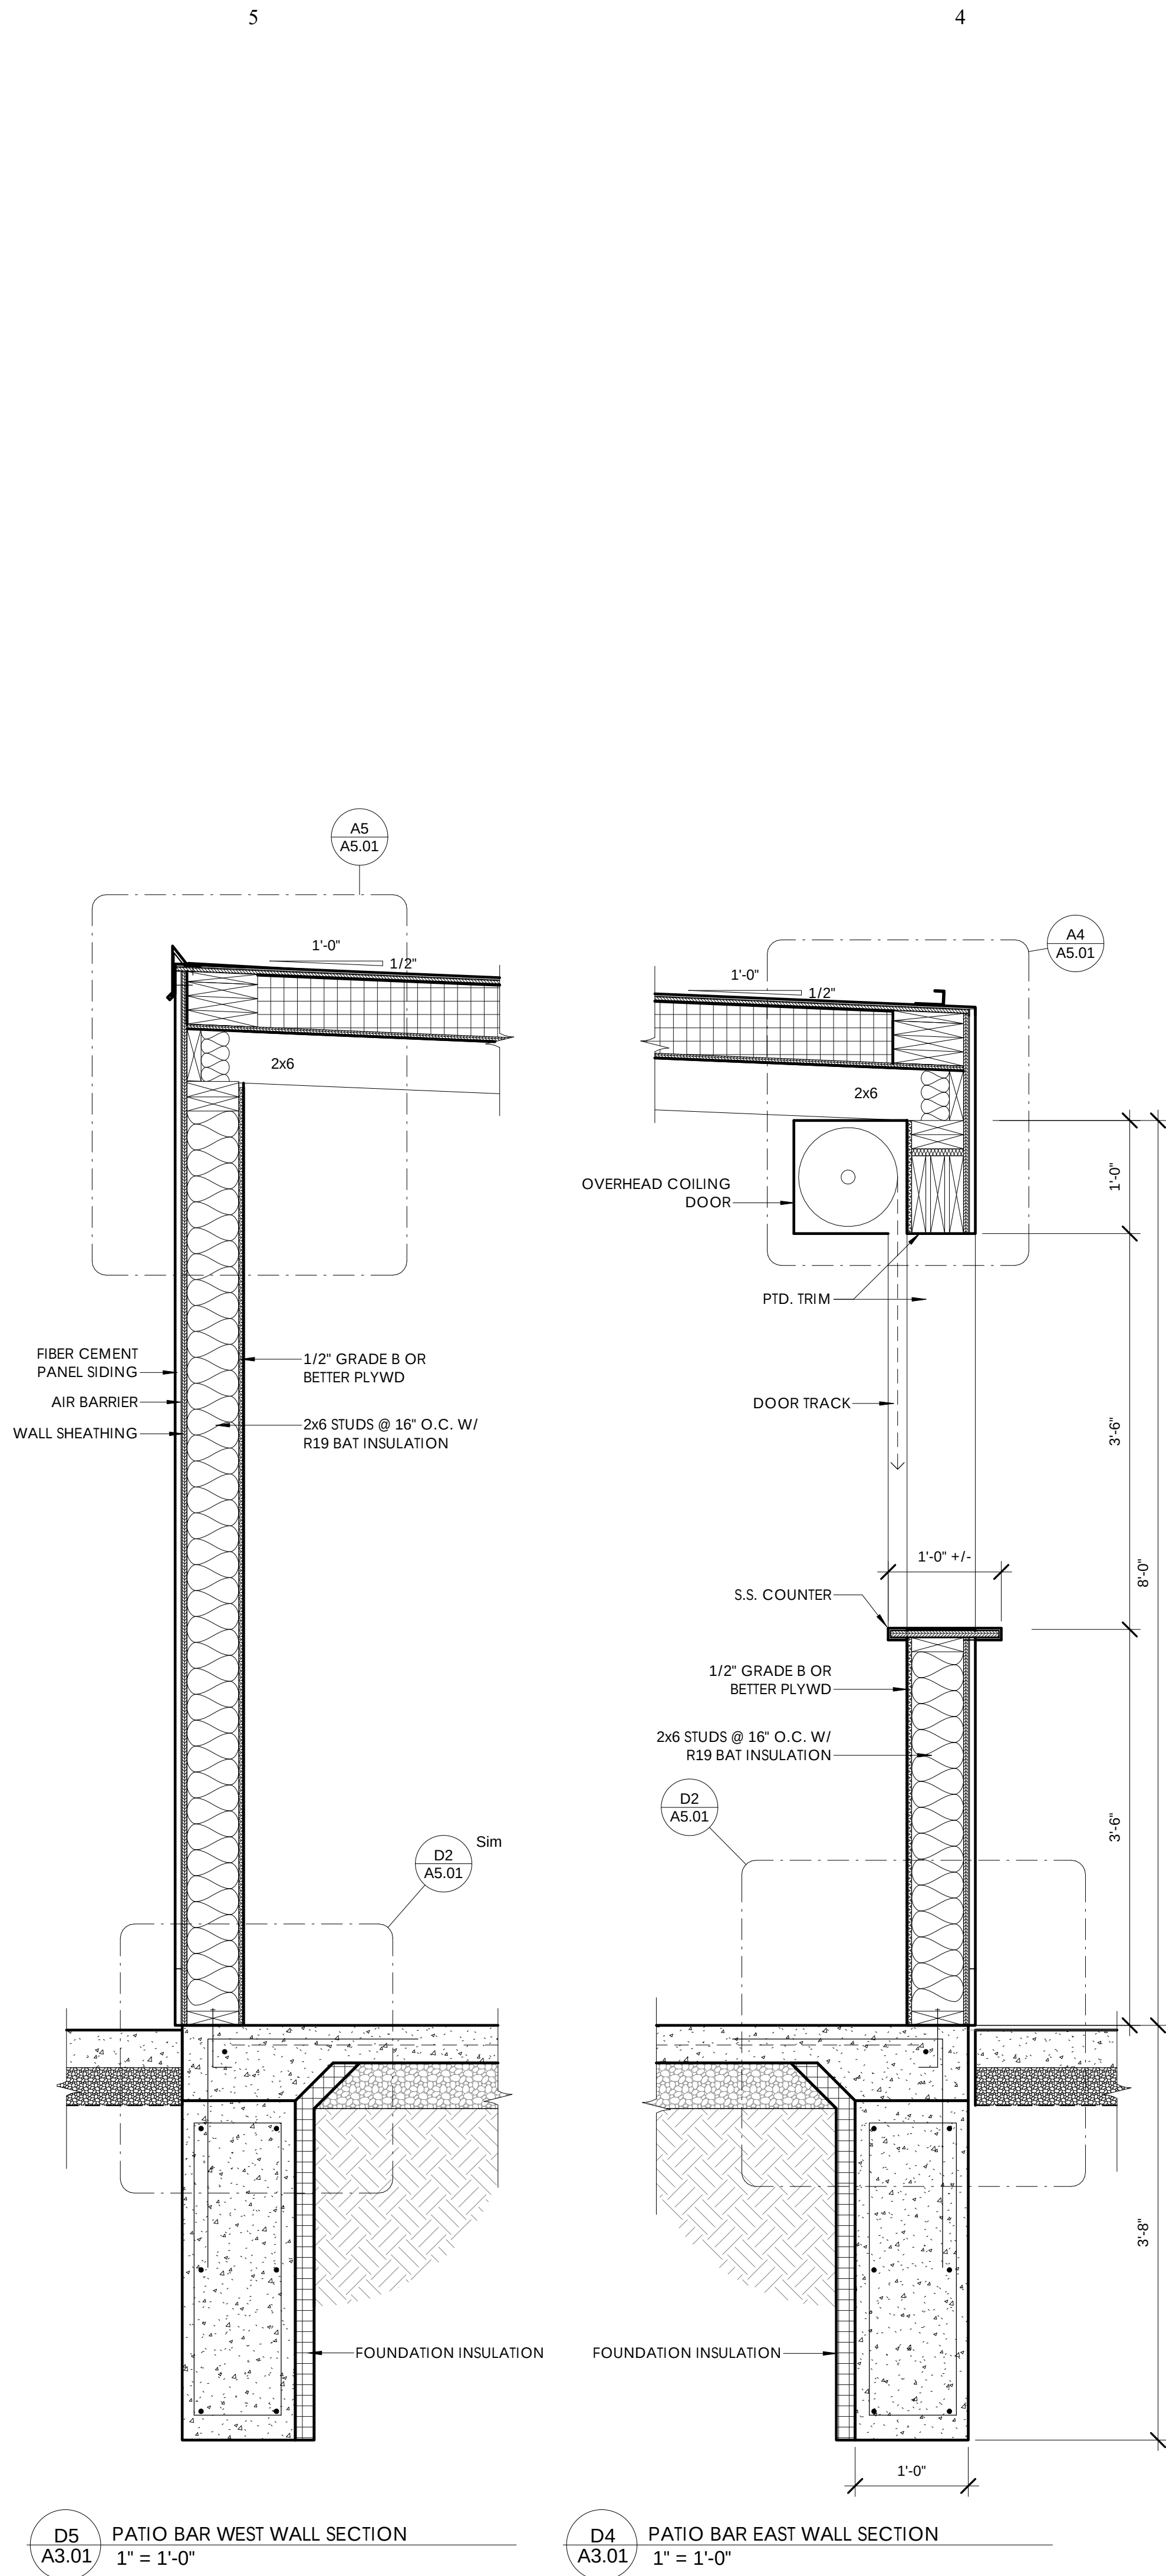

INTEGRATING NATURE AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
BID SET		

Project Number: **19013B**

Date: **5/25/2022**

Project Name: **PARKSIDE RESTAURANT**

Project Address: **1026 POYNTZ AVE. MANHATTAN, KS 66502**

Sheet Title: **BUILDING SECTIONS**

Sheet: **A3.01**

Of:


5

4


3

2


1

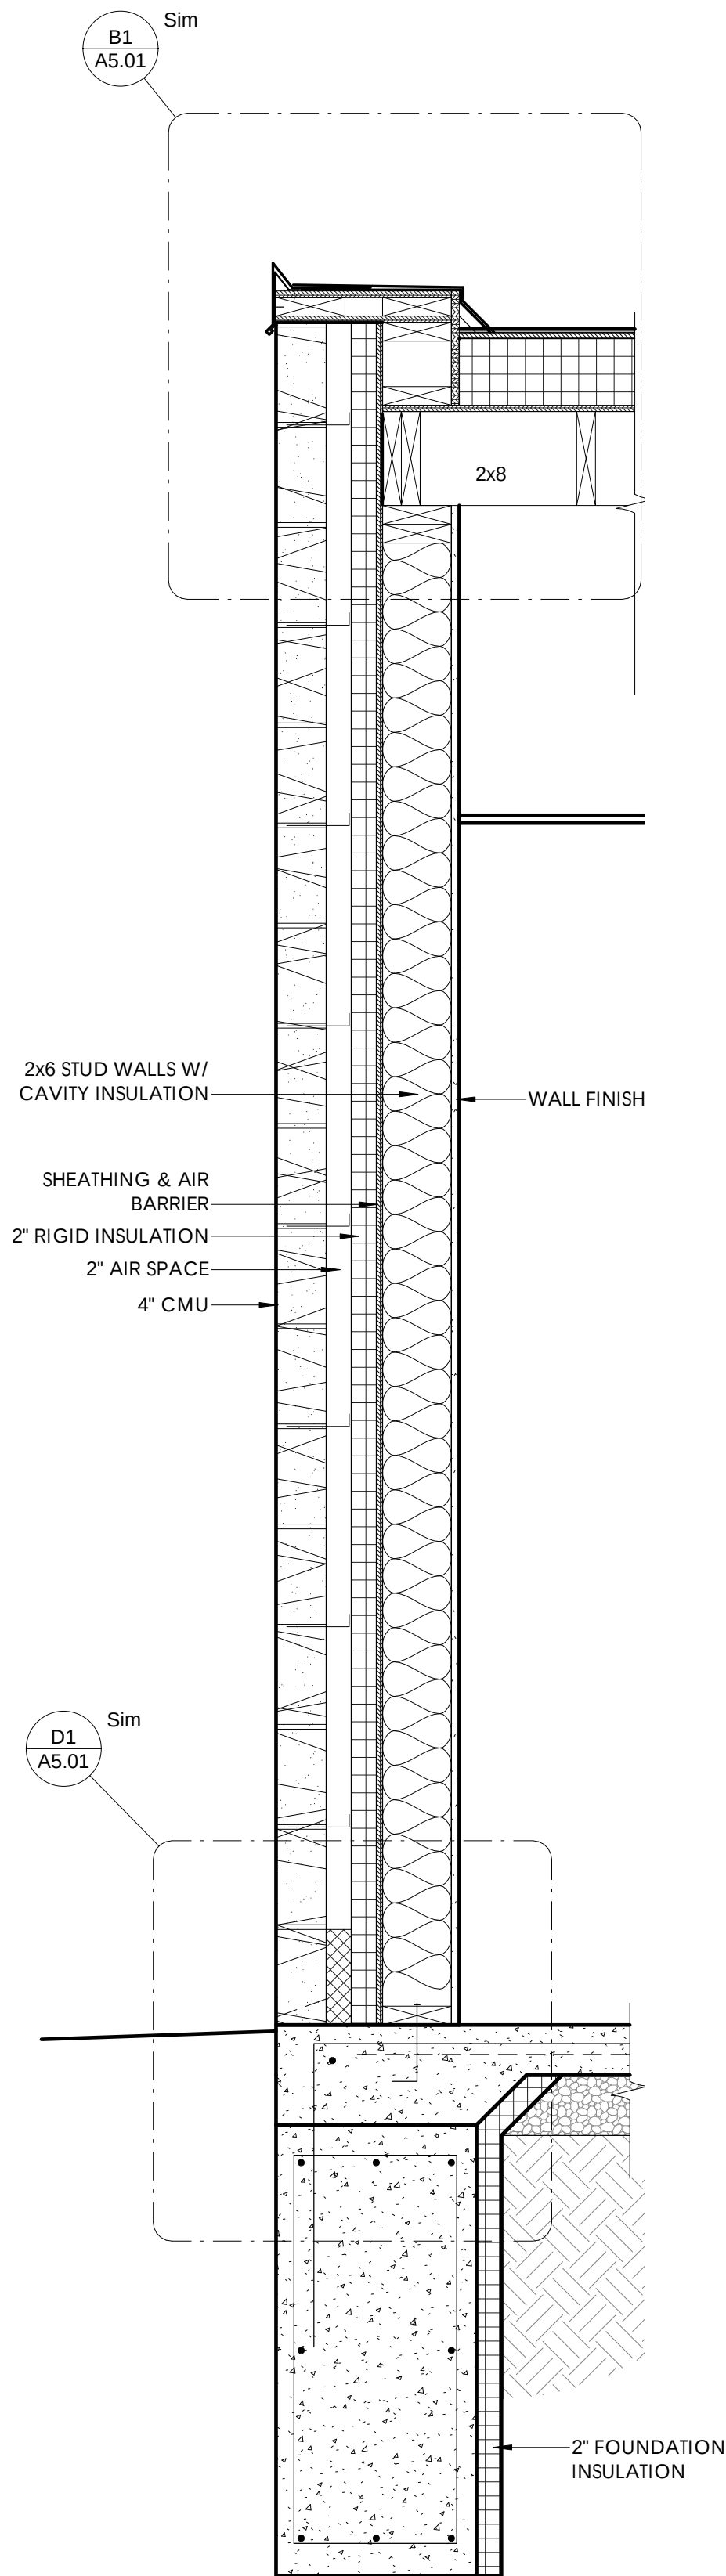


D6
A3.02 WALL SECTION @ NORTH ADDITION WALL
1" = 1'-0"

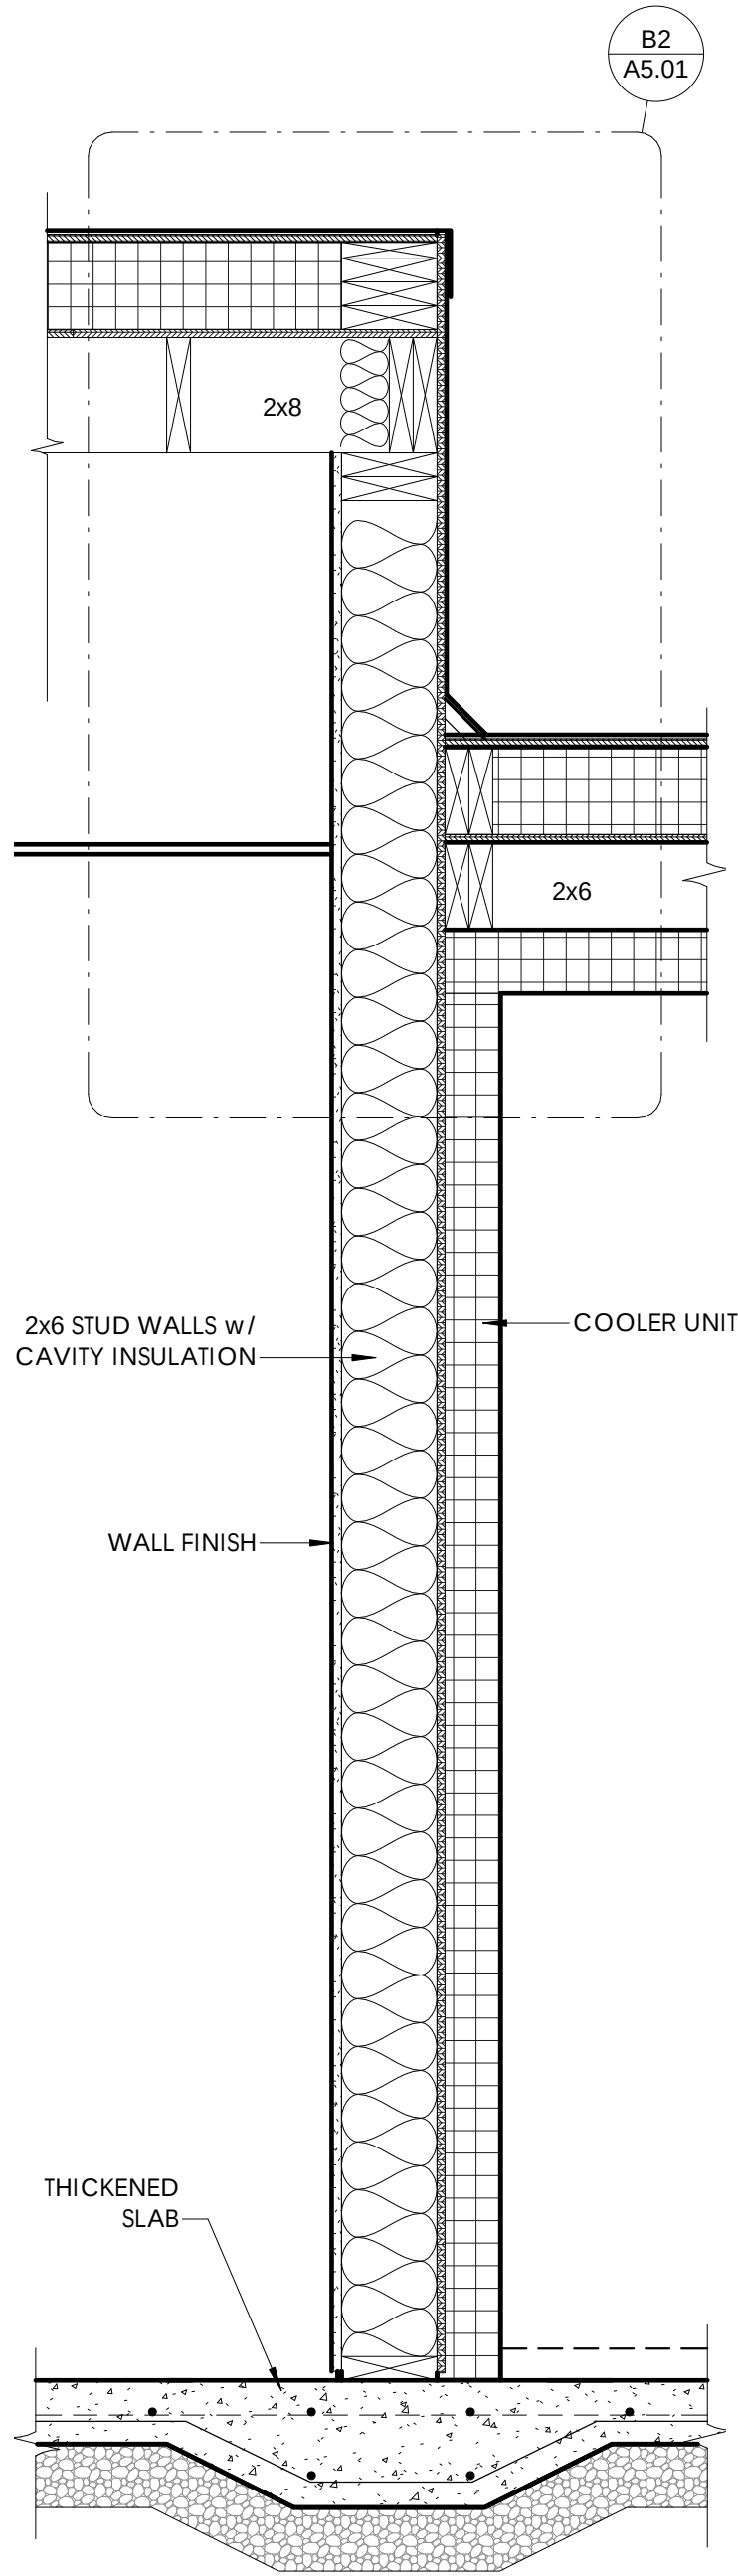


D5
A3.02 WALL SECTION @ ELEVATION CHANGE
1" = 1'-0"

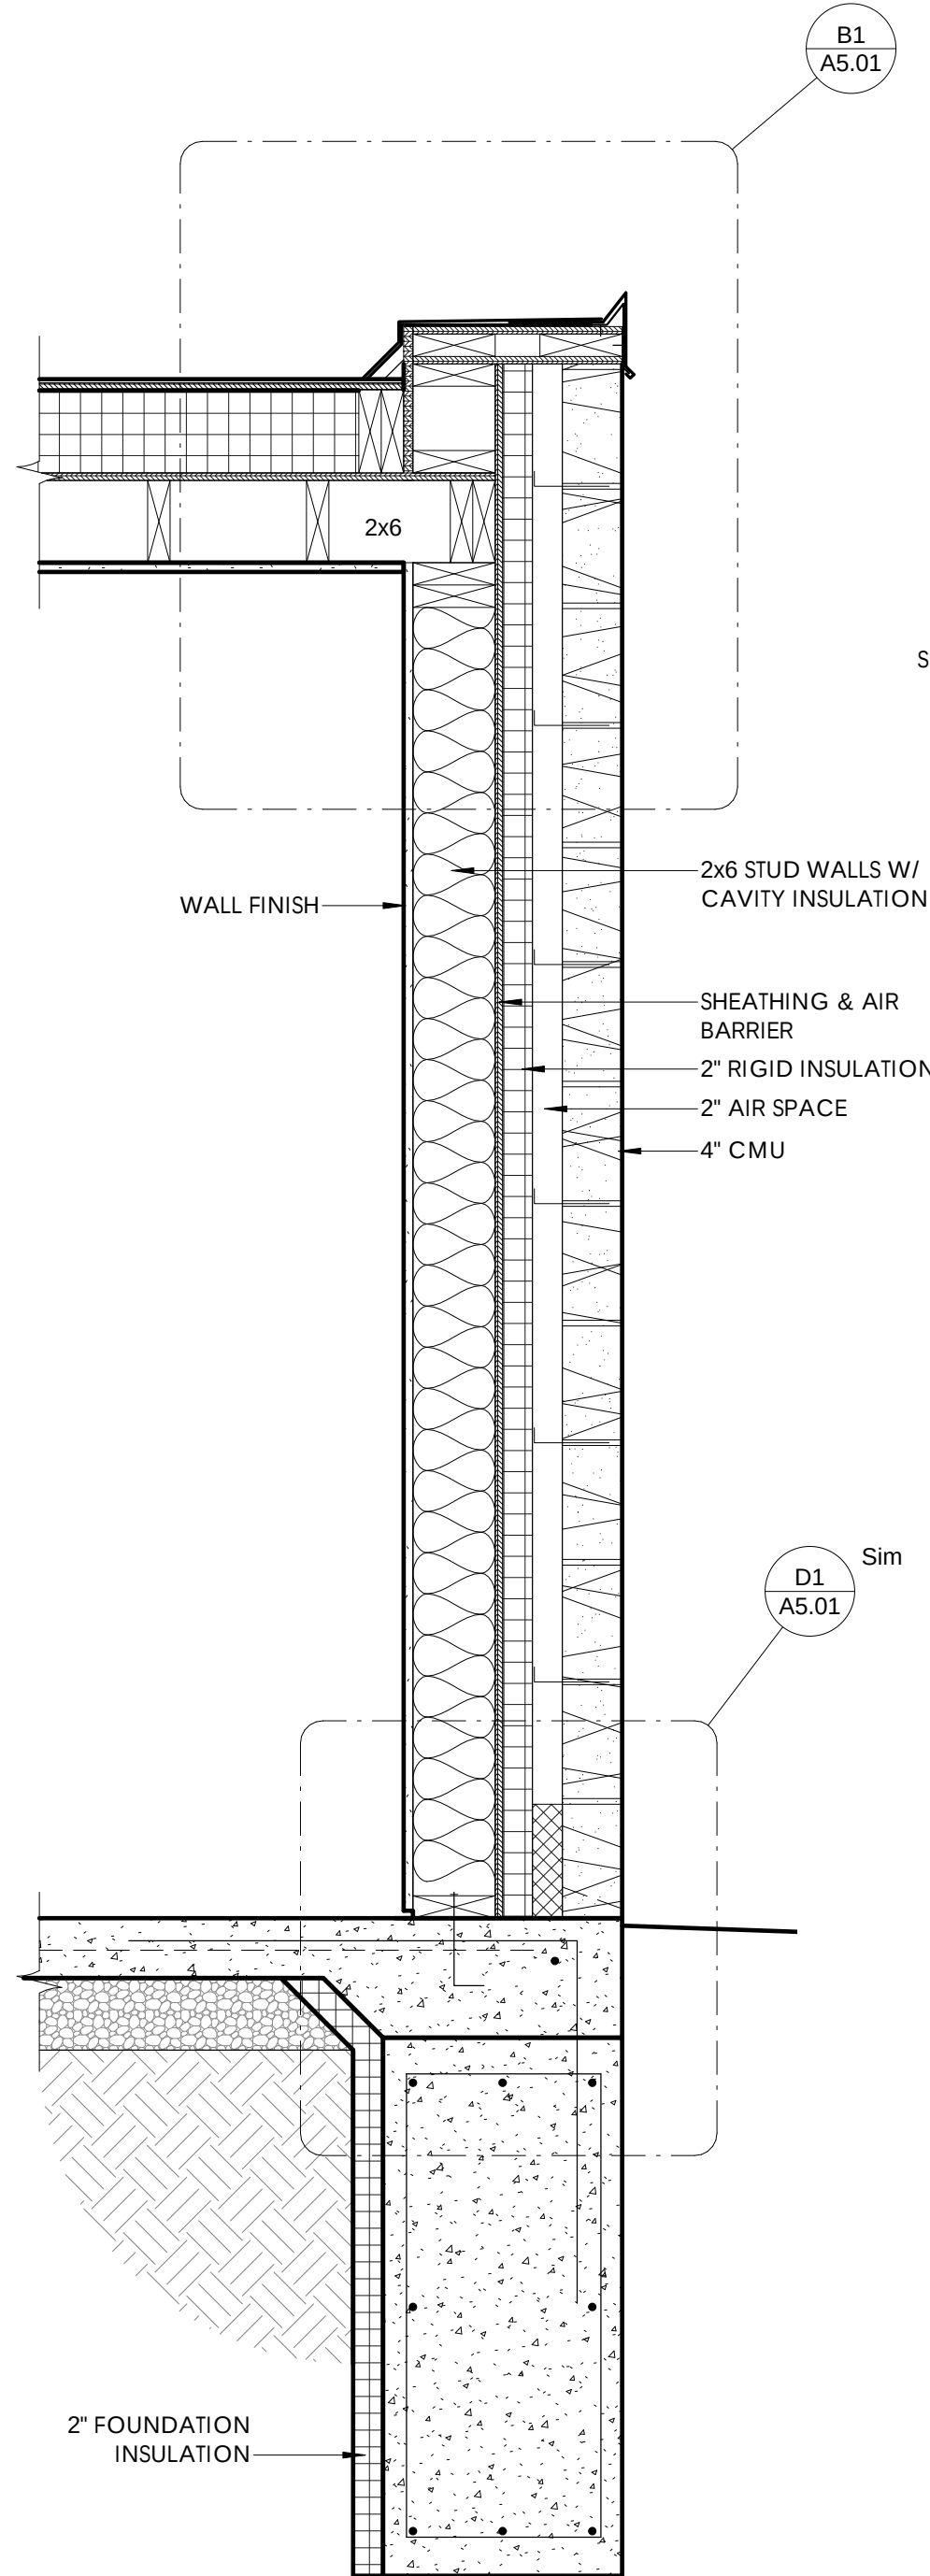


D4
A3.02 WALL SECTION @ SOUTH ADDITION WALL
1" = 1'-0"

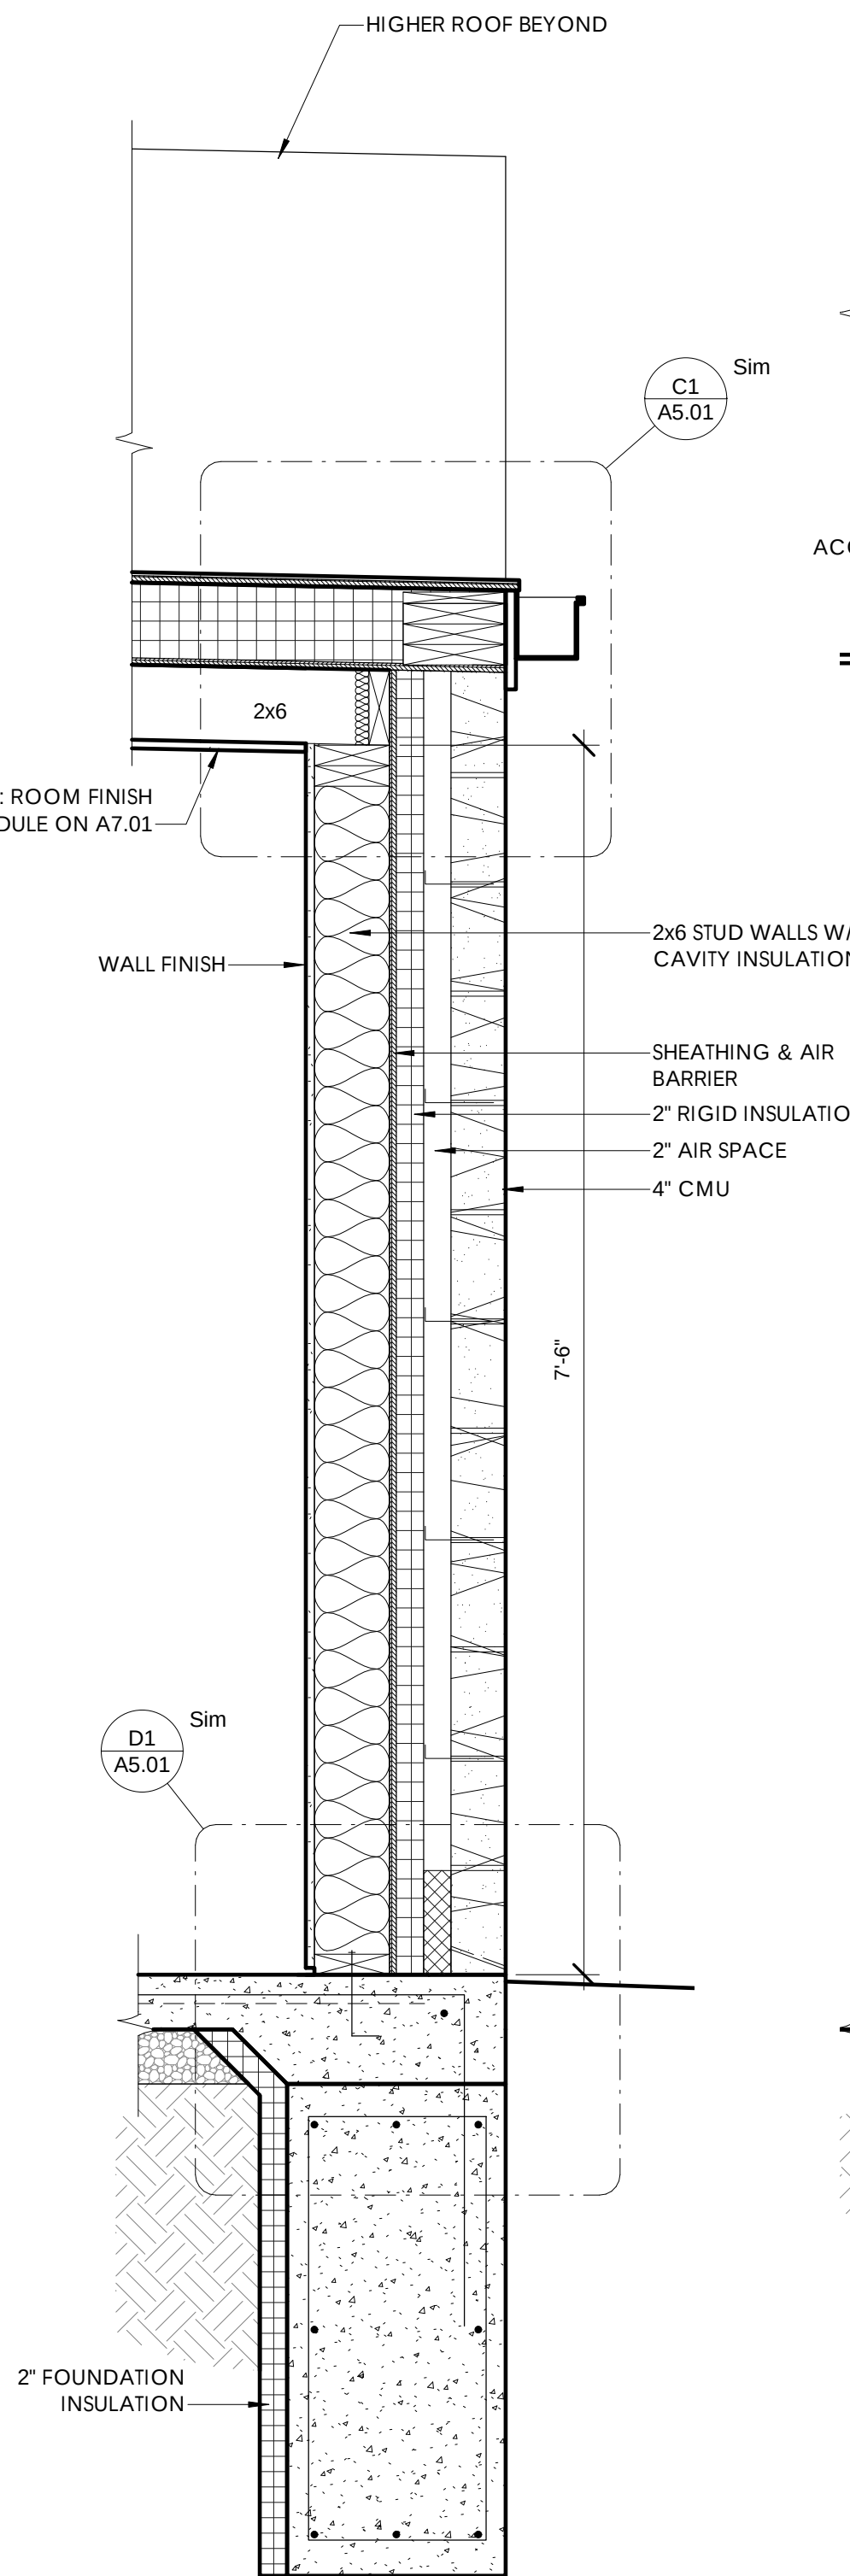

D3
A3.02 WALL SECTION @ LOWER WALL ELEVATION
1" = 1'-0"

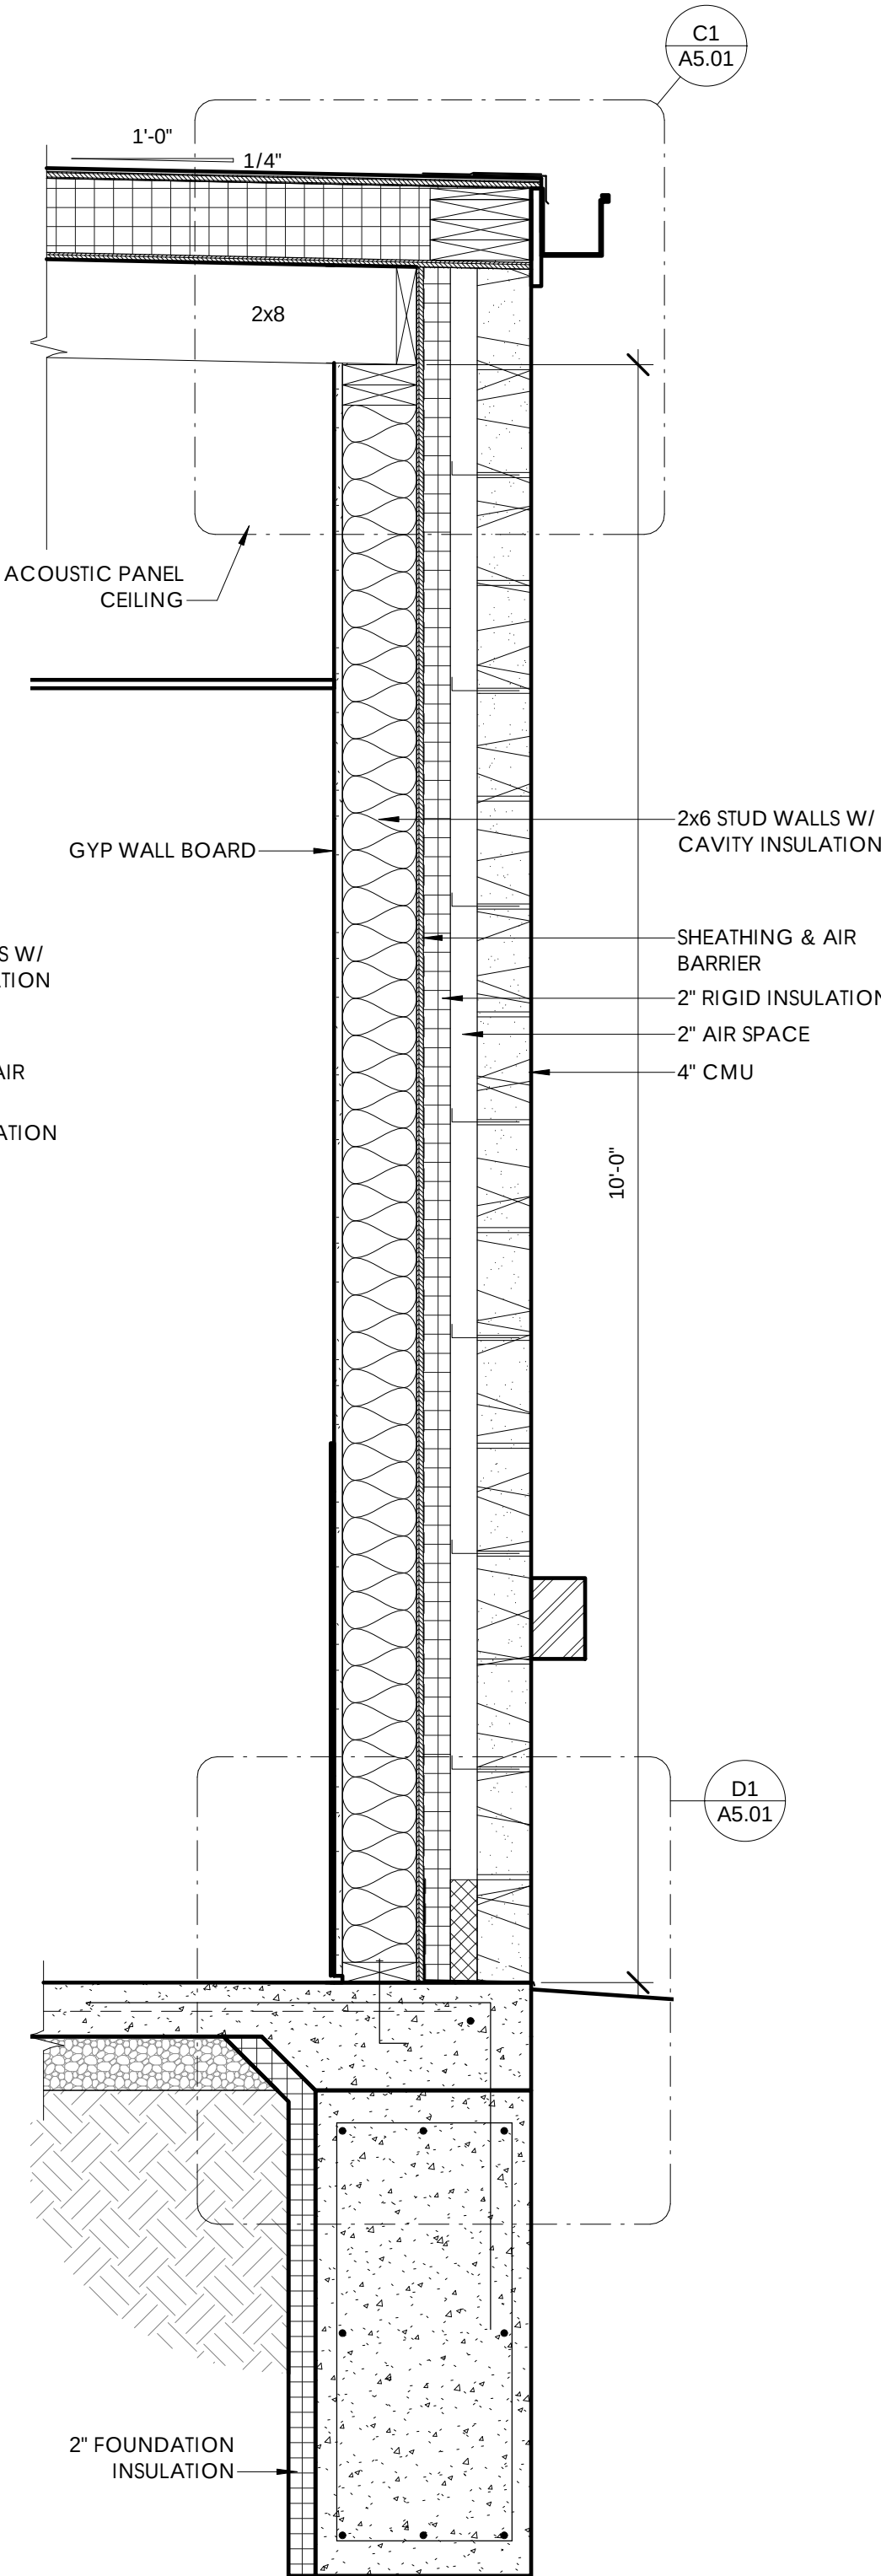

D2
A3.02 TYPICAL ADDITION EAST WALL SECTION
1" = 1'-0"

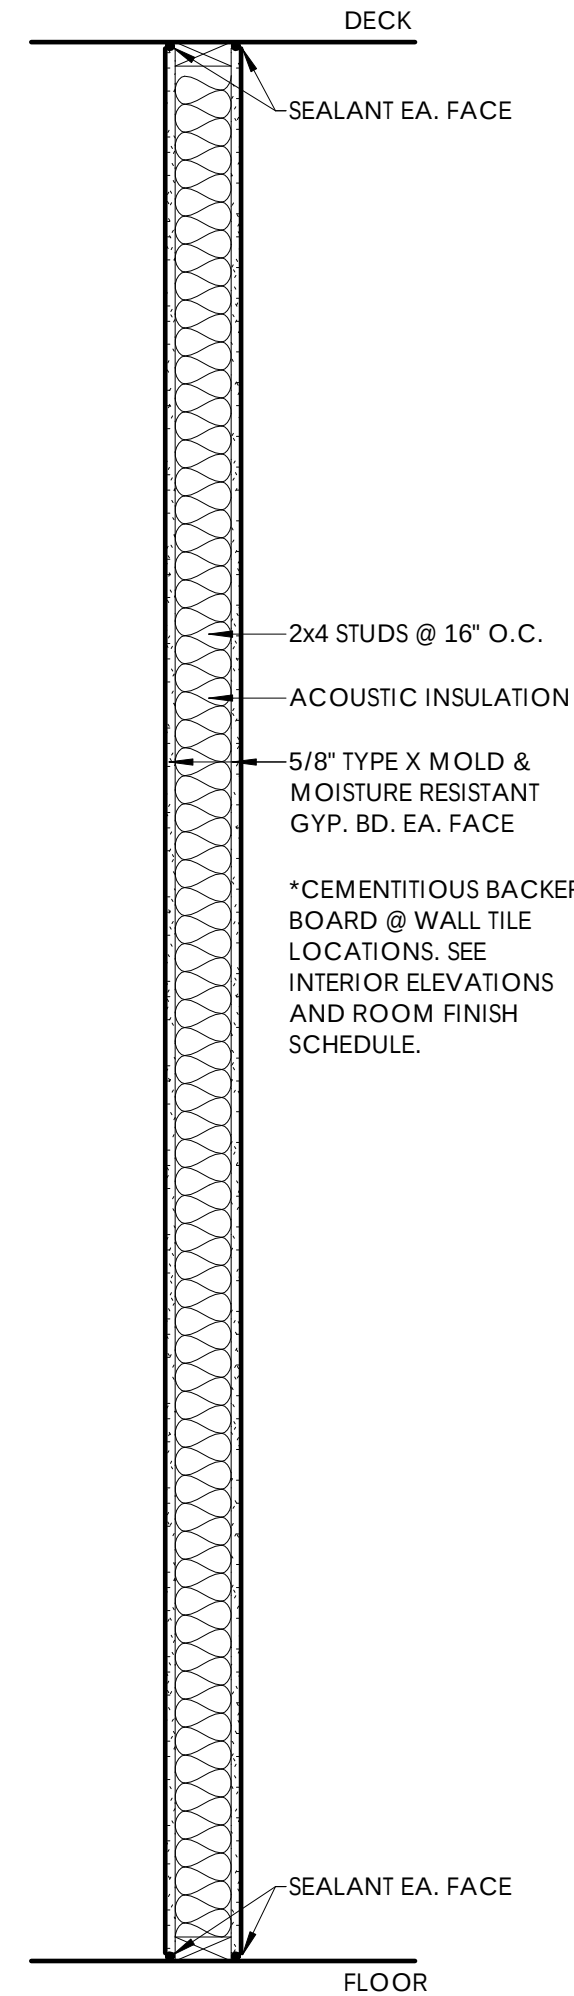

D1
A3.02 TYPICAL INTERIOR STUD WALL - S1A
1" = 1'-0"



INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
**1026 POYNTZ AVE.
MANHATTAN, KS 66502**


Sheet Title:

**WALL
SECTIONS**

Sheet:

A3.02

Of:

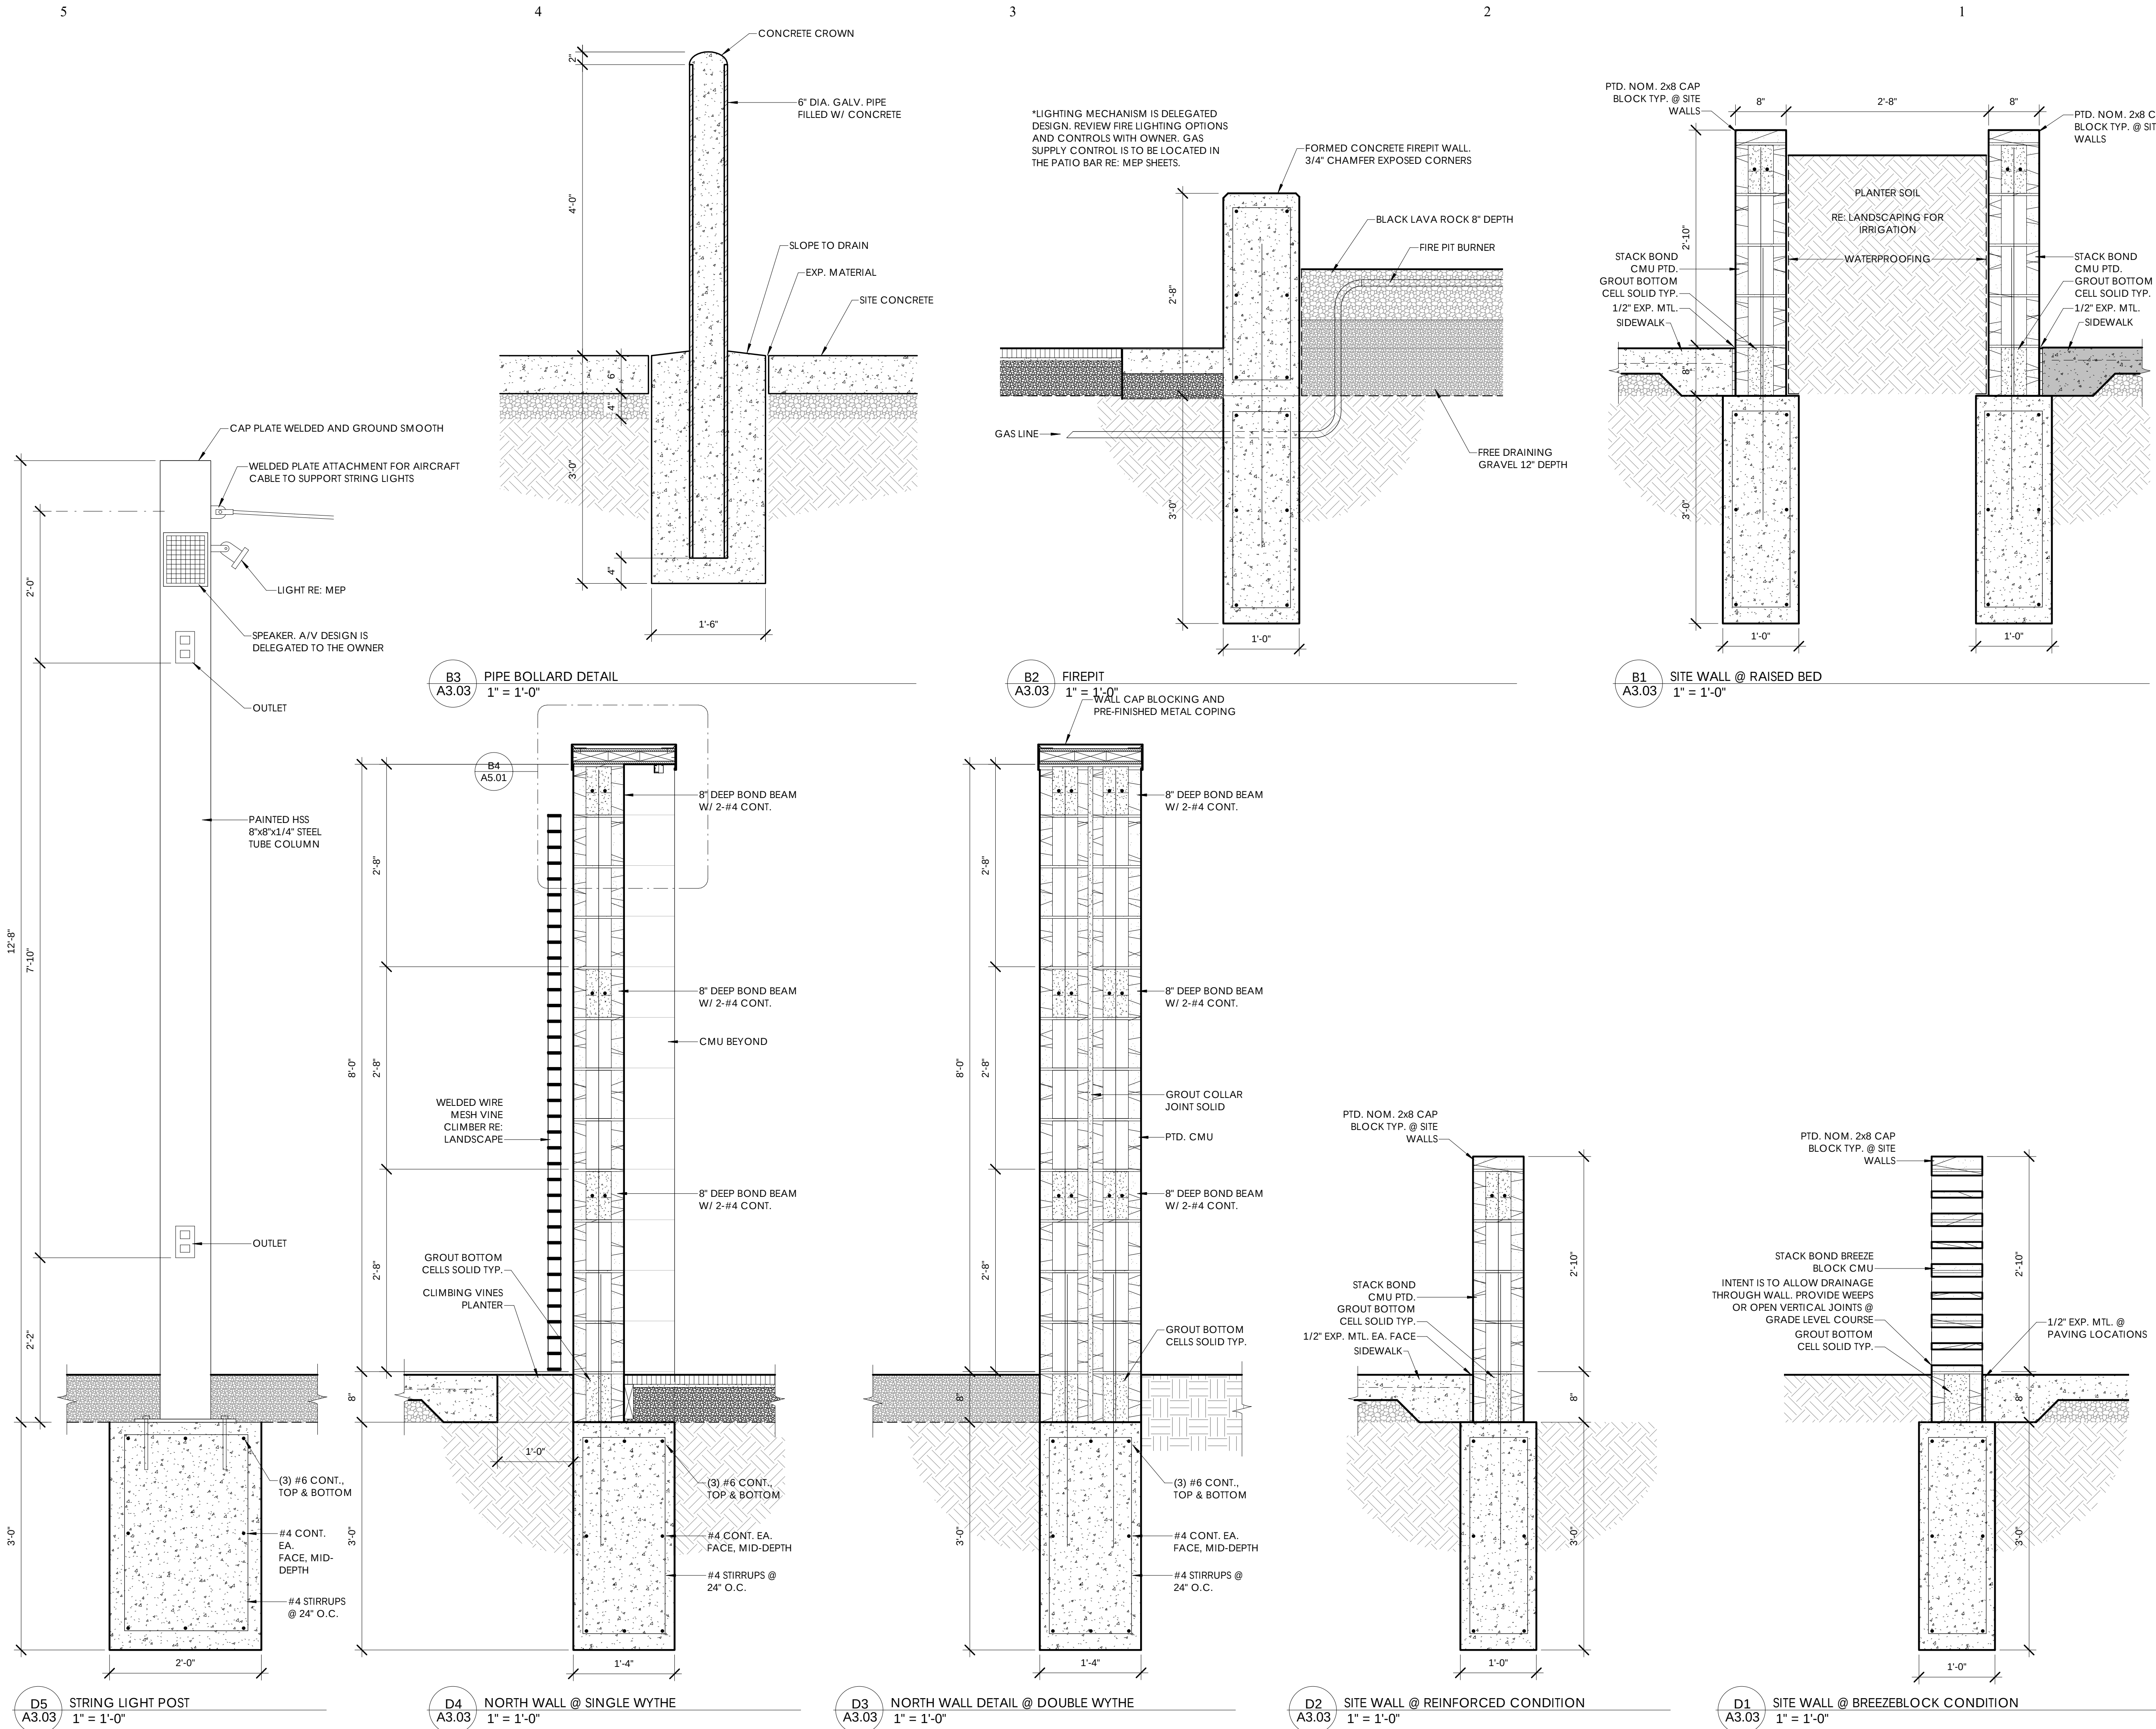

INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:

1026 POYNTZ AVE.
MANHATTAN, KS 66502


Sheet Title:

**SITE WALL
SECTIONS
DETAILS**

Sheet:

A3.03

Of:

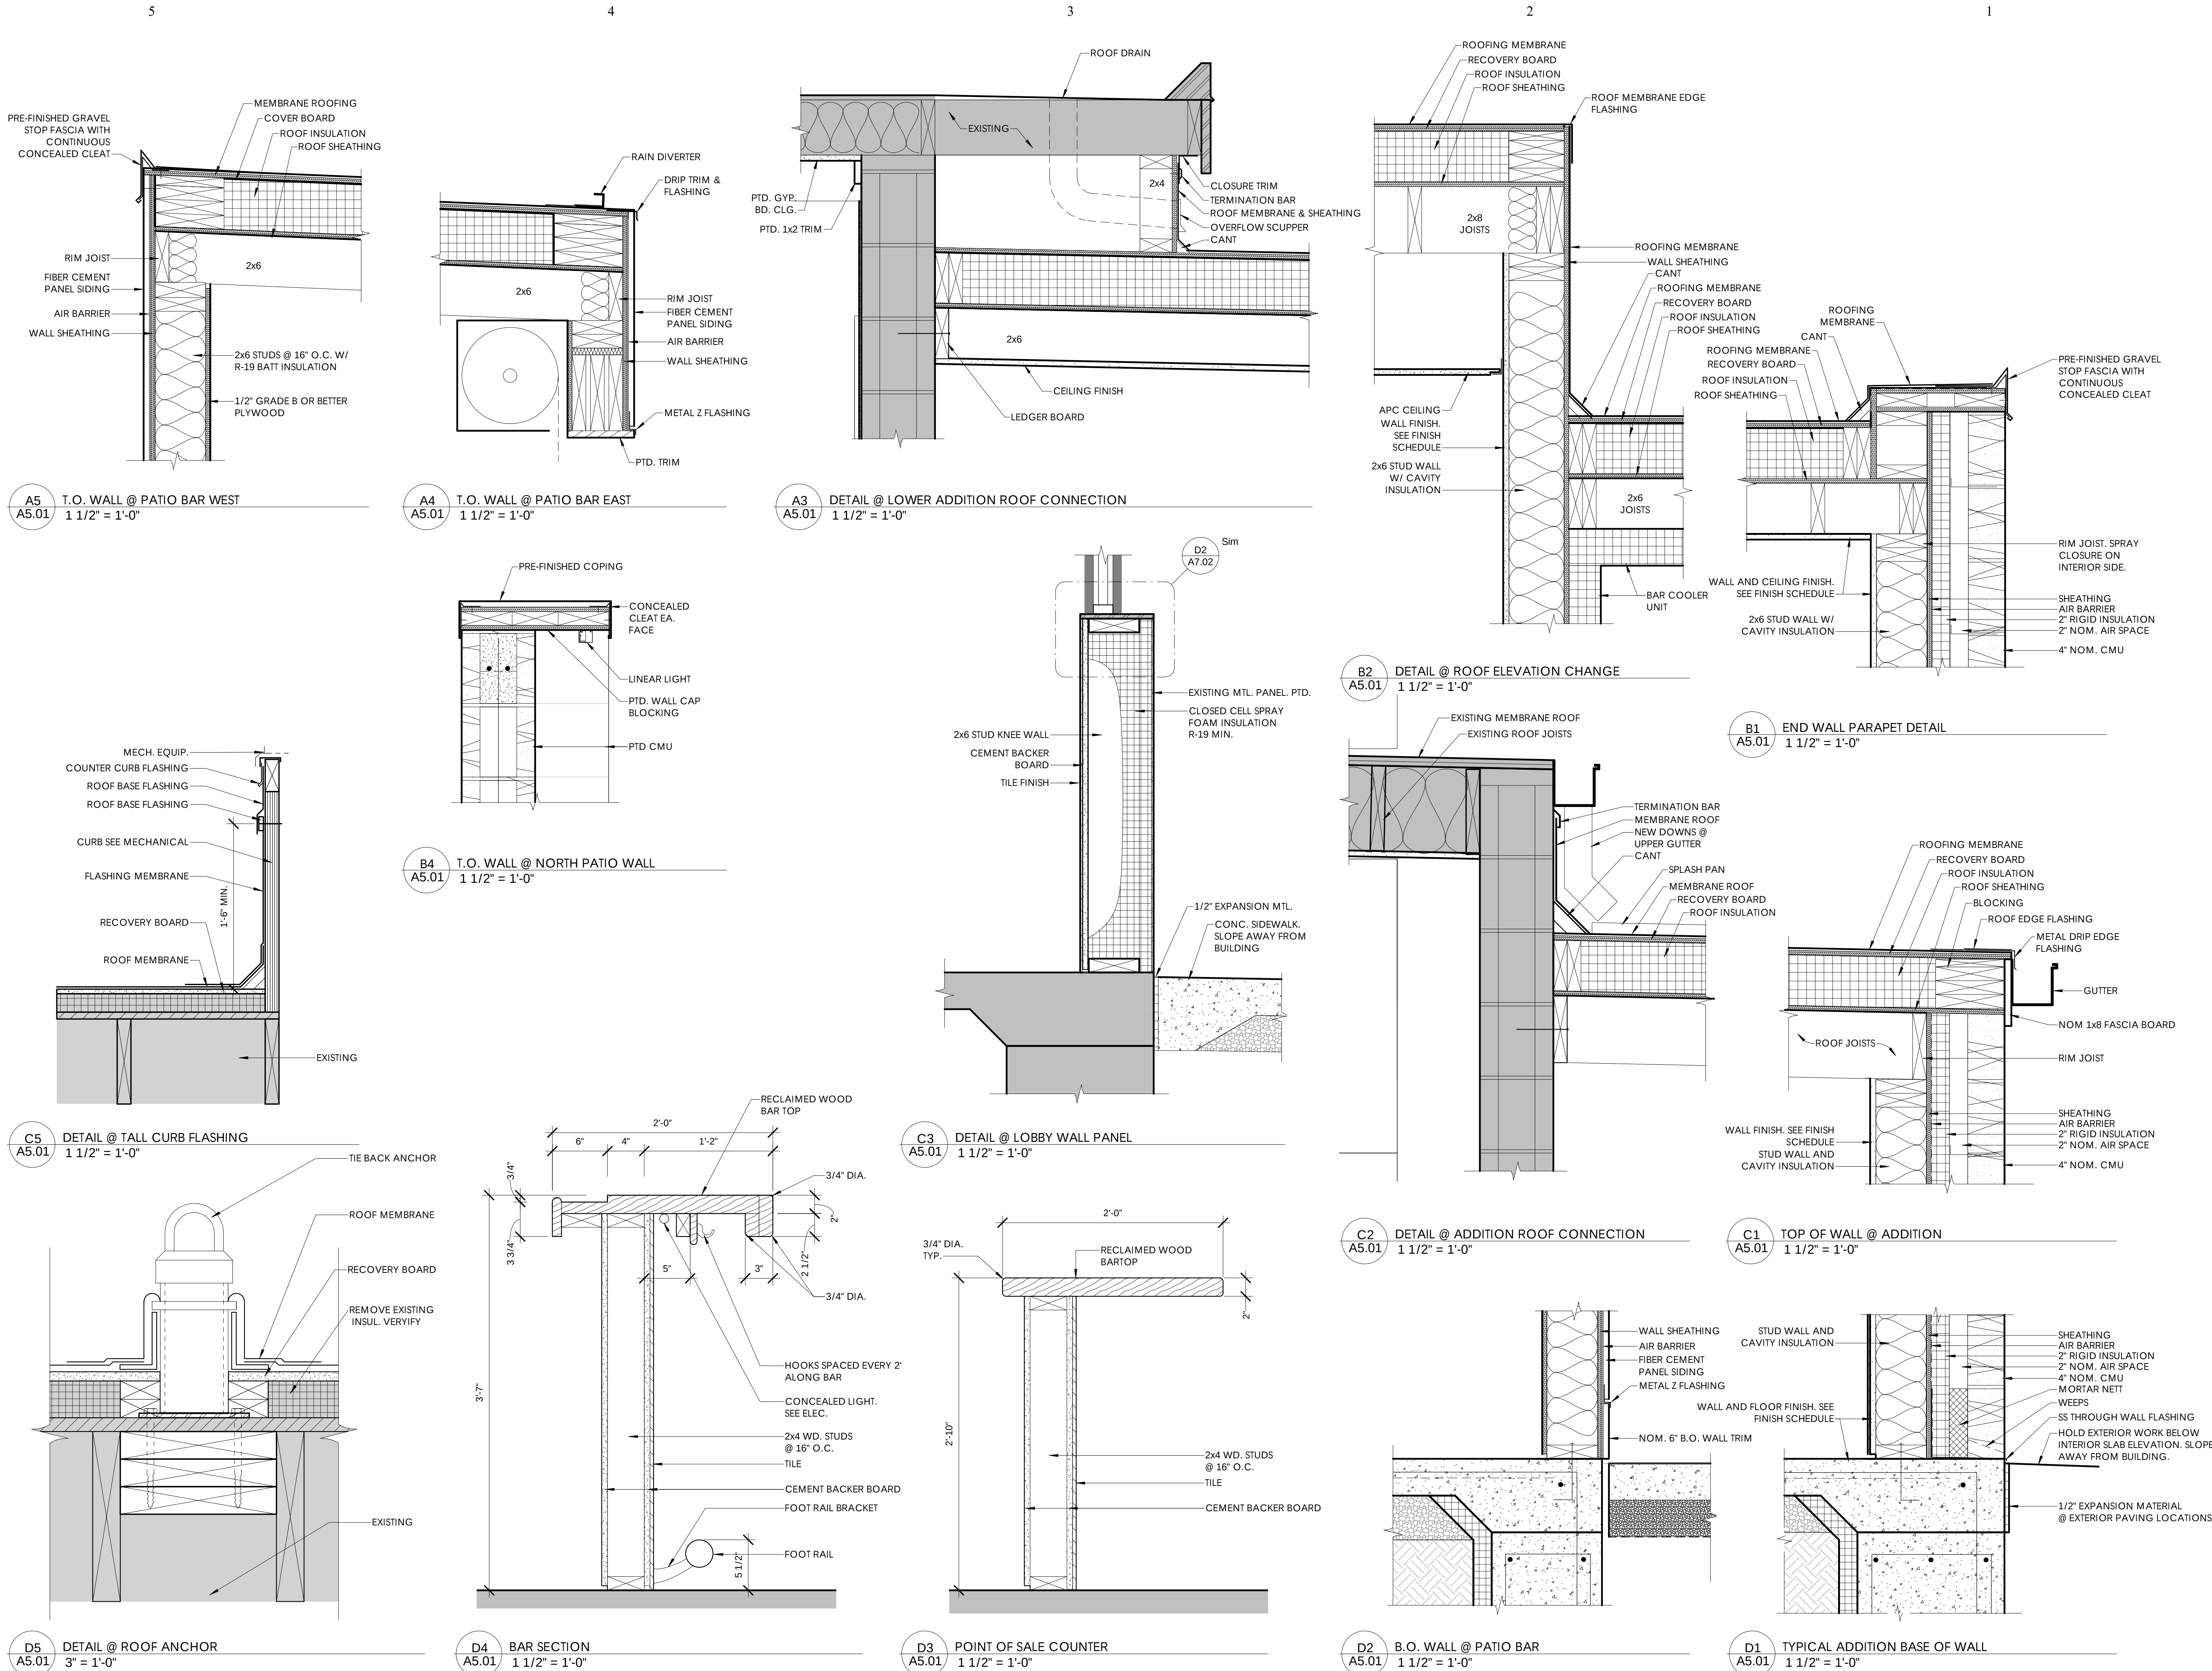

INTEGRATING NATURE AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
BID SET		

Project Number: **19013B**

Date: **5/25/2022**


Project Name: **PARKSIDE RESTAURANT**

Project Address: **1026 POYNTZ AVE. MANHATTAN, KS 66502**


Sheet Title: **DETAILS**

Sheet: **A5.01**


Of:

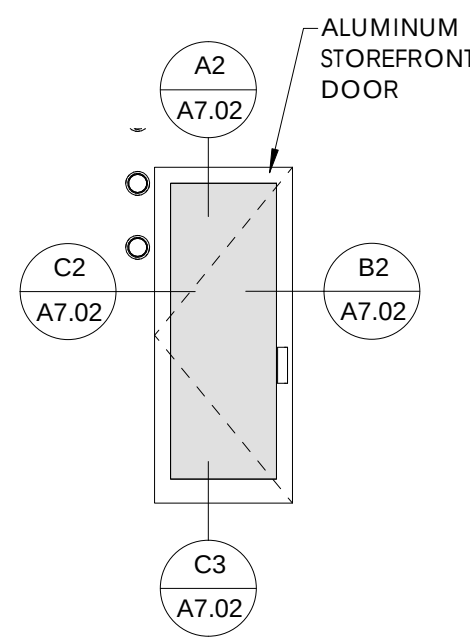


DOOR TYPE A

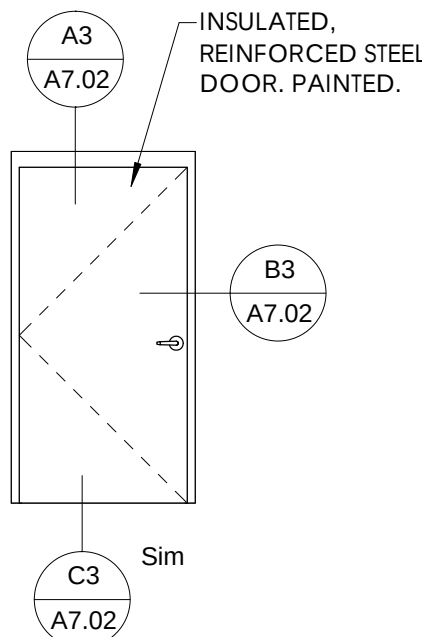


DOOR TYPE B

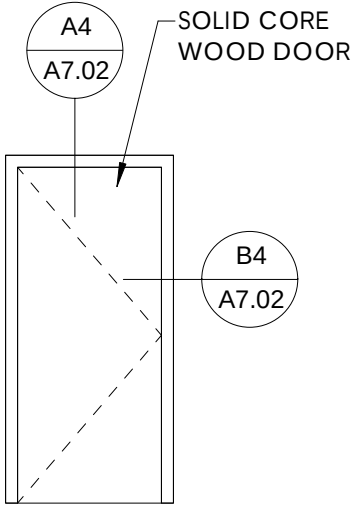


DOOR TYPE C

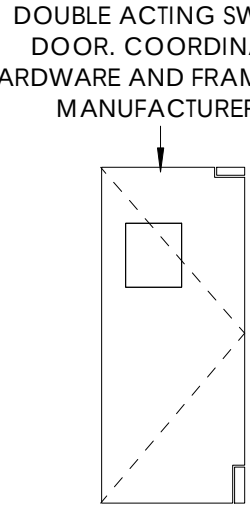

DOOR TYPE D

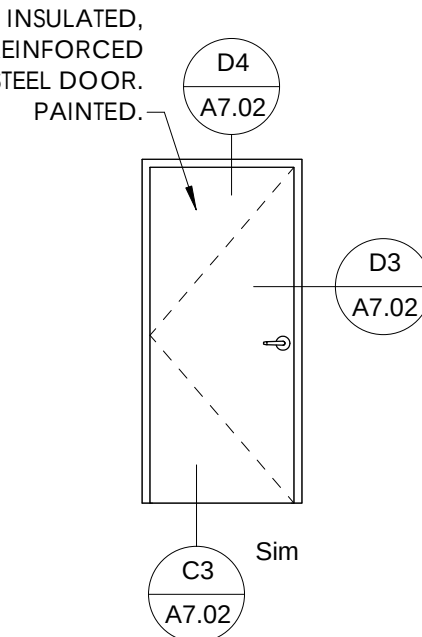


DOOR TYPE E

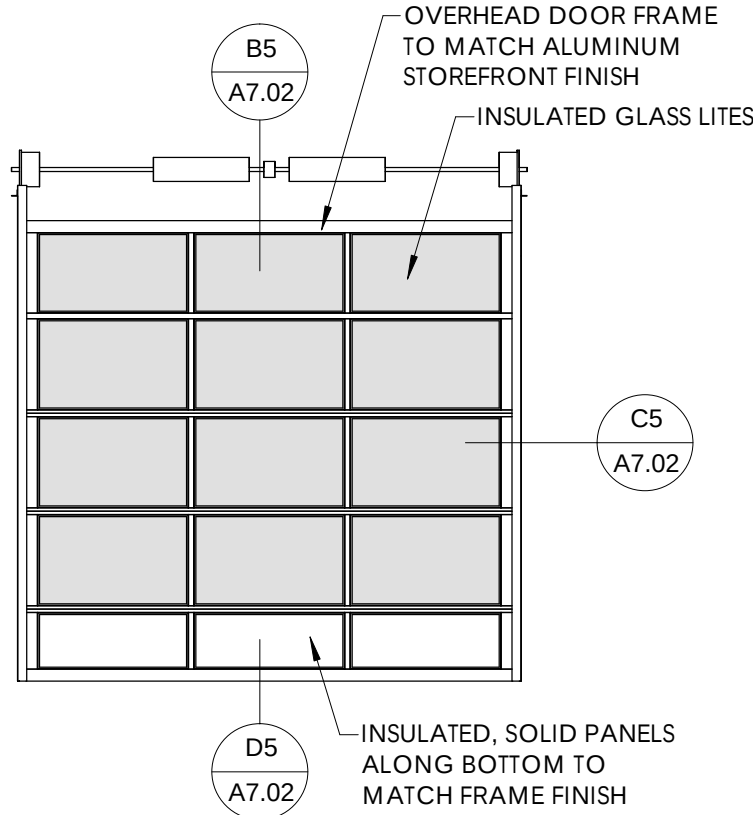


OVERHEAD DOOR

DOOR SCHEDULE					
NUMBER	WIDTH	HEIGHT	DOOR TYPE	HARDWARE SET	COMMENTS
101A	2'-11"	7'-0"	A		VERIFY DIMENSIONS WITH EXISTING CONDITIONS TYP.
101B	2'-10 1/2"	7'-0"	A		VERIFY DIMENSIONS WITH EXISTING CONDITIONS TYP.
104	2'-5 1/4"	7'-0"	A		VERIFY DIMENSIONS WITH EXISTING CONDITIONS TYP.
104A	10'-0"	9'-6"	OHD		VERIFY DIMENSIONS WITH EXISTING CONDITIONS TYP.
106	3'-0"	7'-0"	C		
107	3'-0"	7'-0"	C		
108	3'-0"	7'-0"	C		
109	2'-6"	7'-0"	C		
111	2'-6"	7'-0"	C		
112A	2'-6"	7'-0"	D		
112B	3'-6"	7'-0"	B		
113A	3'-0"	7'-0"	E		
113B	3'-0"	7'-0"	E		
COOL	3'-0"	7'-0"			BAR COOLER DOOR. VERIFY DIMENSIONS, HARDWARE, AND DETAILS WITH MANUFACTURER.
FRZ	3'-0"	7'-0"			FREEZER DOOR. VERIFY DIMENSIONS, HARDWARE, AND DETAILS WITH MANUFACTURER.
REF	3'-0"	7'-0"			REFRIGERATOR DOOR. VERIFY DIMENSIONS, HARDWARE, AND DETAILS WITH MANUFACTURER.


ROOM SCHEDULE													
NUMBER	NAME	FLOOR FINISH	WALL BASE	NORTH		EAST		SOUTH		WEST		CEILING	COMMENTS
				MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH		
101	MARKET LOBBY	SEALED CONC.	TILE	NA		TILE		WINDOWS		WINDOWS		GYP. BD.	
102	BAR	SEALED CONC.	TILE	TILE		TILE		WINDOWS		NA		GYP. BD.	
103	BAR STORAGE	SEALED CONC.	TILE	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	BLOCK	PTD.	GYP. BD.	
104	DINING	SEALED CONC.	TILE	RE: A4/A2.02		TILE/ BLOCK	PTD.	TILE		WINDOWS		GYP. BD.	
105	VESTIBULE	SEALED CONC.	TILE	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	NA		APC	
106	RESTROOM	SEALED CONC.	TILE	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	APC	
107	STORAGE	SEALED CONC.	TILE	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	APC	
108	RESTROOM	SEALED CONC.	TILE	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	APC	
109	MECHANICAL	EPOXY	TILE	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	GYP. BD.	PTD.	APC	
110	WASH ROOM	EPOXY	TILE	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	APC	
111	EMPLOYEE	EPOXY	TILE	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	TILE/ GYP.	PTD.	APC	
112	KITCHEN	EPOXY	TILE	TILE/ BLOCK	PTD.	TILE/ BLOCK	PTD.	TILE/ GYP.	PTD.	WINDOWS		APC	
113	PATIO BAR	SEALED CONC.		PLYWD.		PLYWD.		PLYWD.		PLYWD.			INTERIOR FINISHES AND OUTFITTINGS DETERMINED BY OWNER. VERIFY MEP REQUIREMENTS BY OWNER.

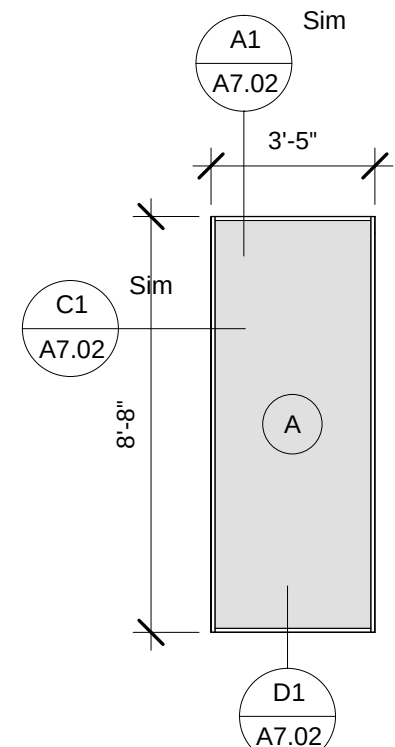


C10
A7.01 WINDOW TYPE A
1/4" = 1'-0"

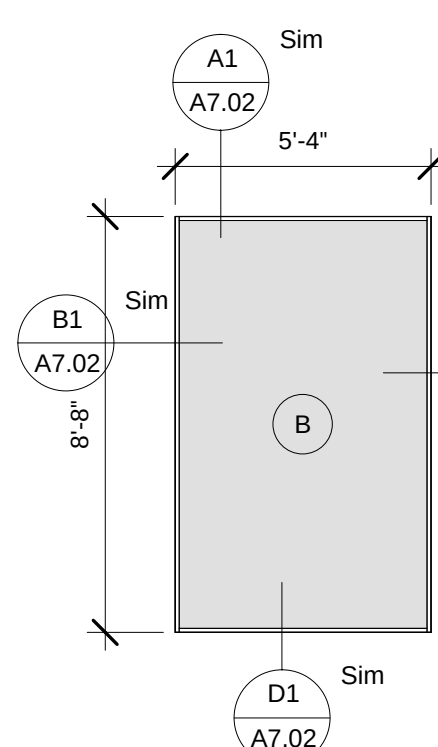


C9
A7.01 WINDOW TYPE B
1/4" = 1'-0"

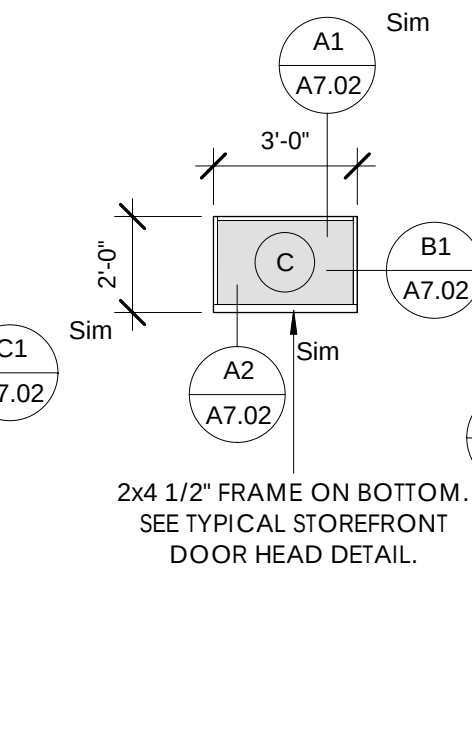


C8
A7.01 WINDOW TYPE C
1/4" = 1'-0"

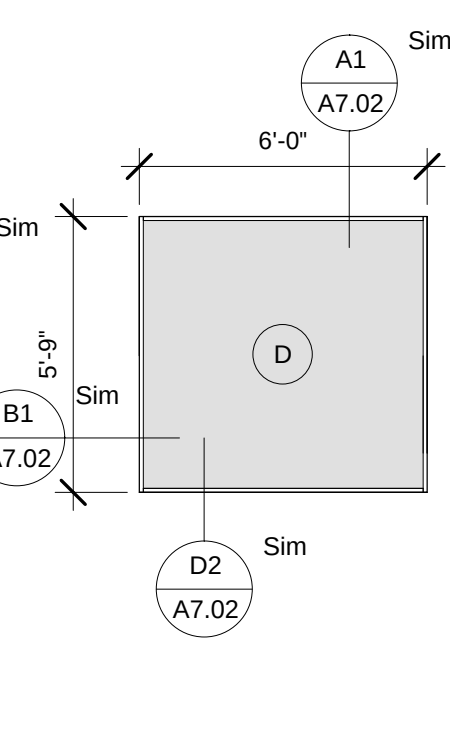


C7
A7.01 WINDOW TYPE D
1/4" = 1'-0"

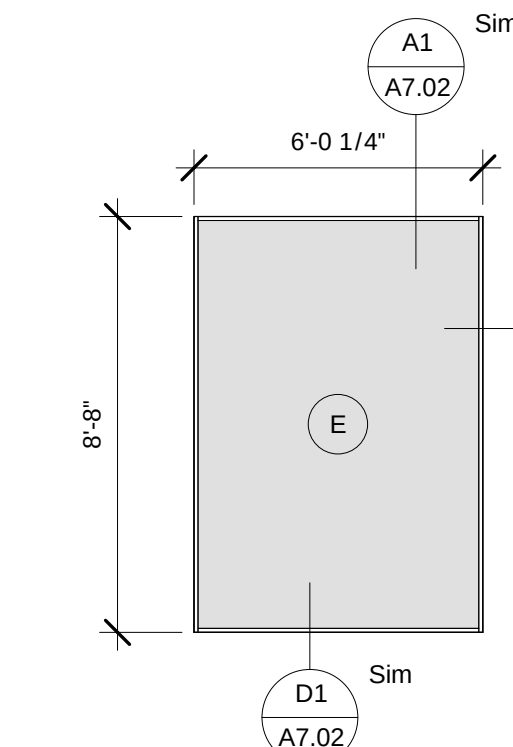


C6
A7.01 WINDOW TYPE E
1/4" = 1'-0"

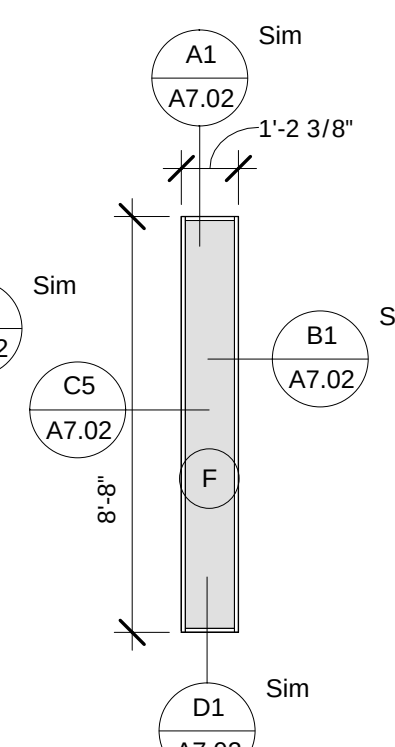


C5
A7.01 WINDOW TYPE F
1/4" = 1'-0"

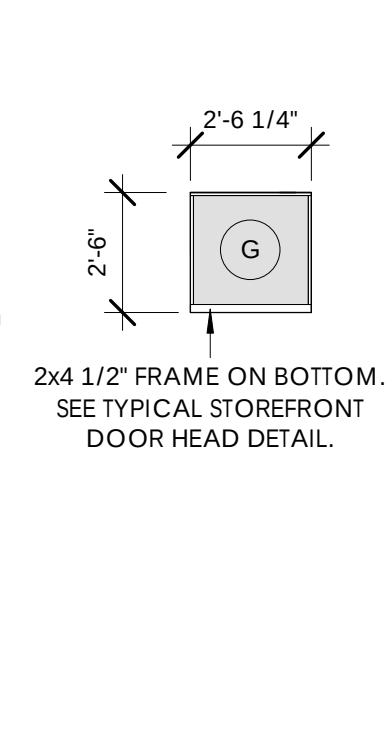


C4
A7.01 WINDOW TYPE G
1/4" = 1'-0"

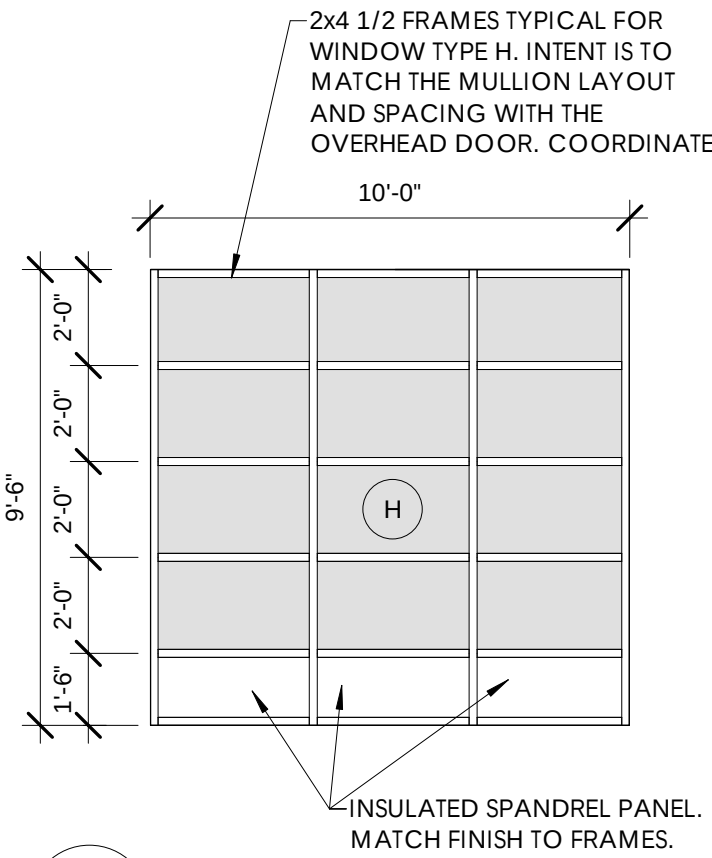

C3
A7.01 WINDOW TYPE H
1/4" = 1'-0"

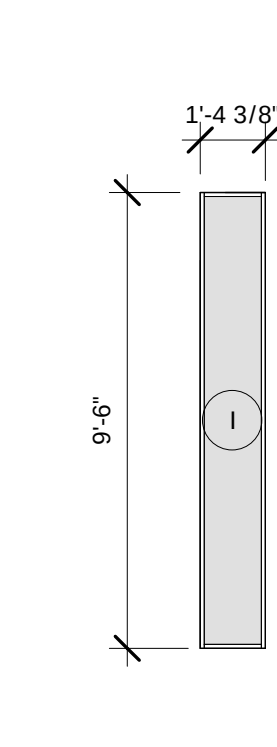

C2
A7.01 WINDOW TYPE I
1/4" = 1'-0"

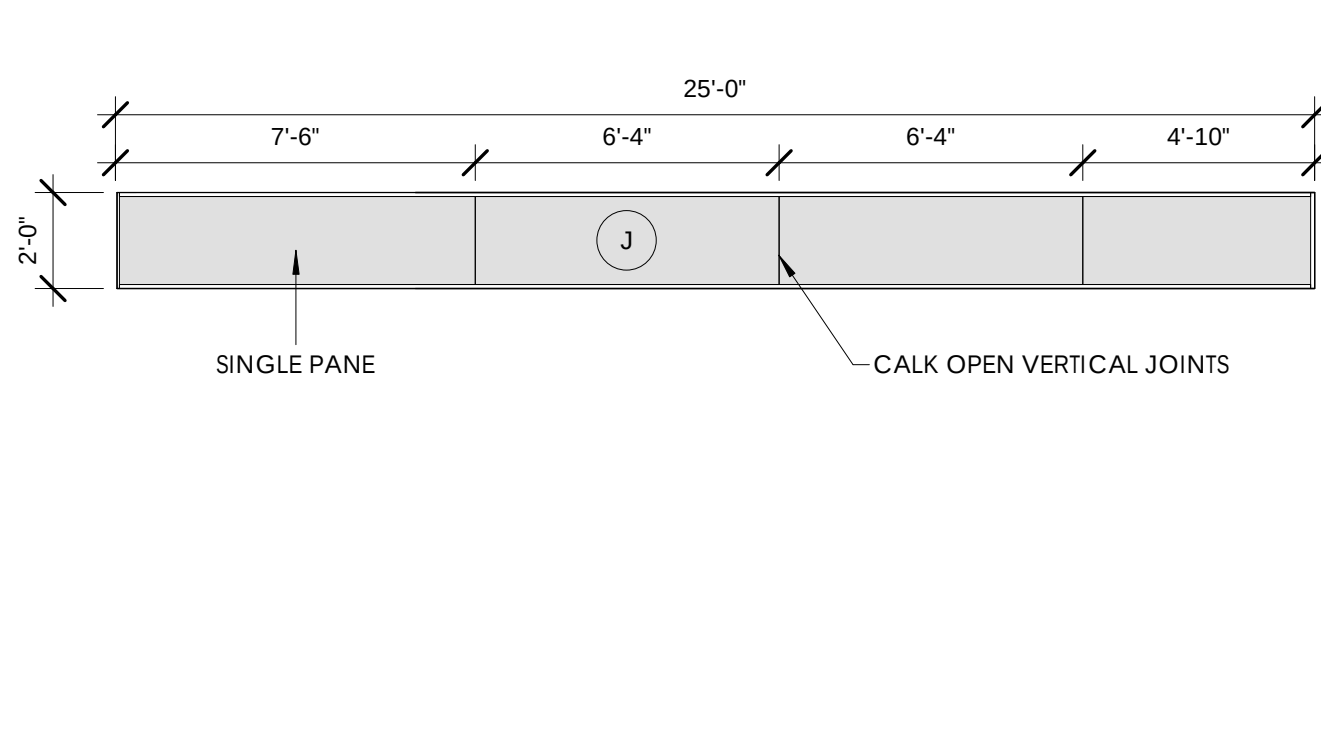

C1
A7.01 WINDOW TYPE J
1/4" = 1'-0"

- WINDOW NOTES:
- FIELD VERIFY ALL DIMENSIONS.
 - PROVIDE SHOP DRAWINGS FOR REVIEW BY ARCHITECT.
 - GLASS TYPE: Clear, insulated, 1" double pane, low-E glazing. Provide tempered glass when sill condition is within 18" of finish floor elevation.
 - FRAME TYPE: Provide small profile thermal "XPT" frames unless noted otherwise. Clear anodized aluminum finish.



INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: 19013B

Date: 5/25/2022

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
1026 POYNTZ AVE.
MANHATTAN, KS 66502

Sheet Title:

SCHEDULES

Sheet:

A7.01

Of:


5

4


3

2


1

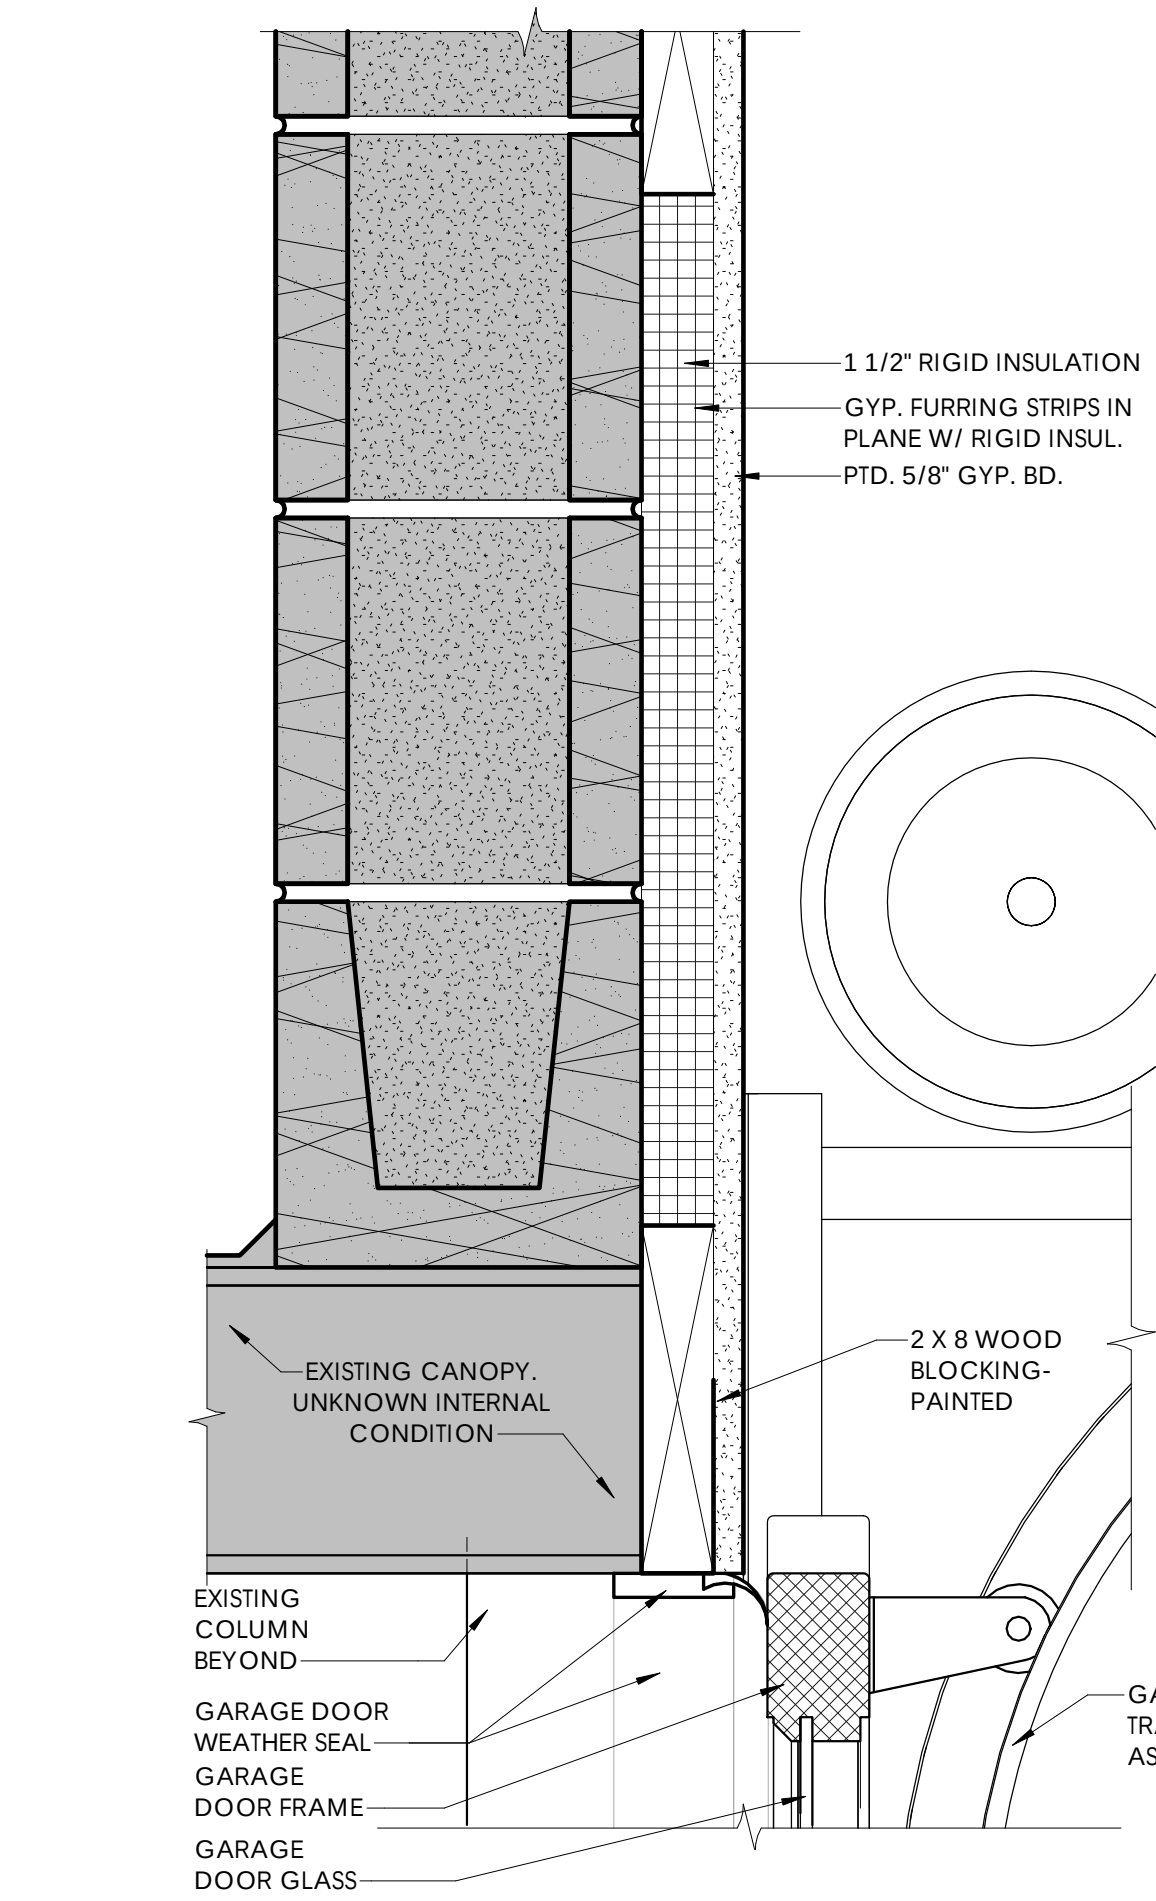


B5
A7.02
OVERHEAD DOOR HEAD
3" = 1'-0"

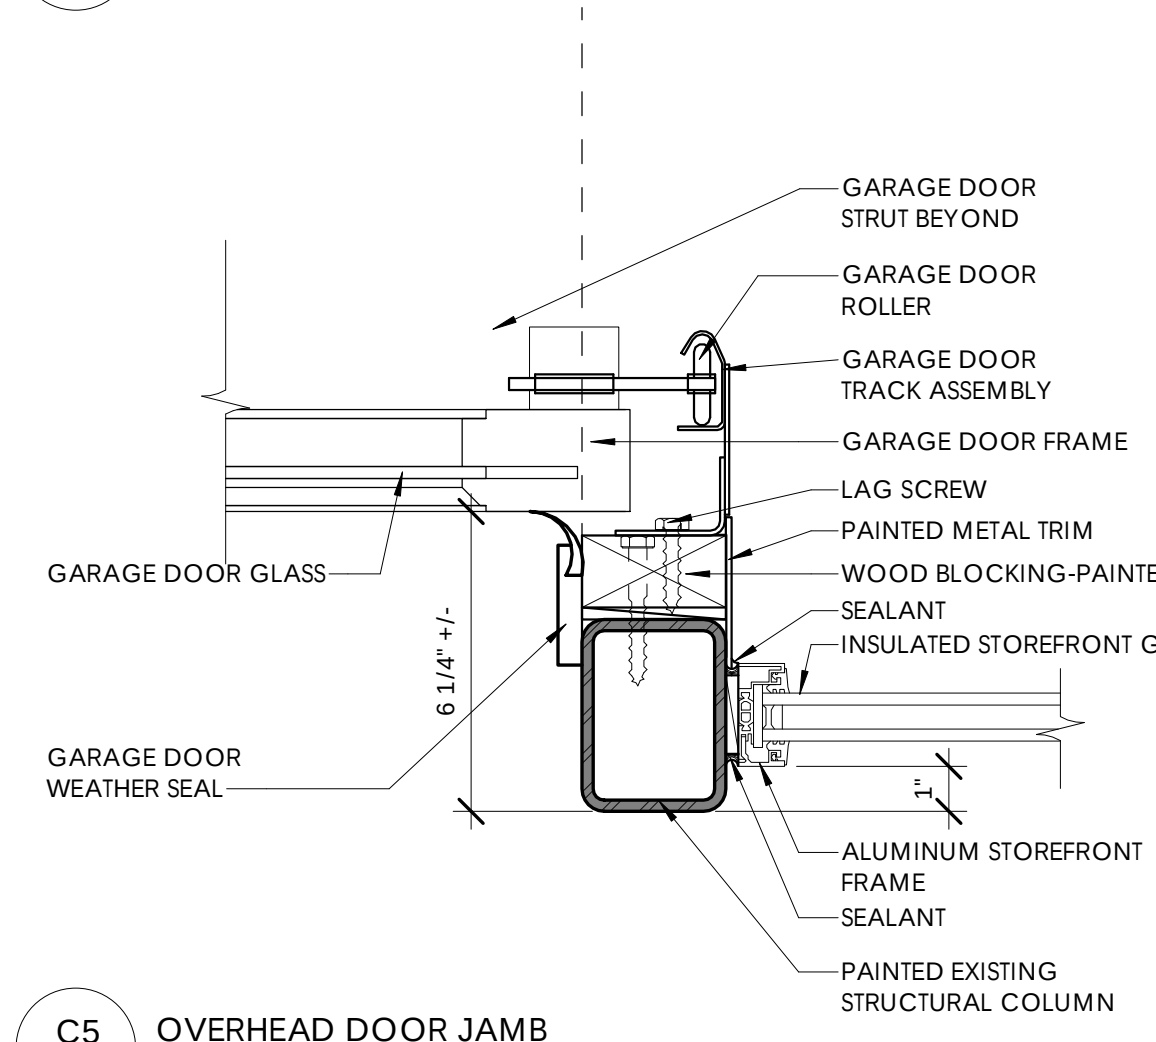


C5
A7.02
OVERHEAD DOOR JAMB
3" = 1'-0"

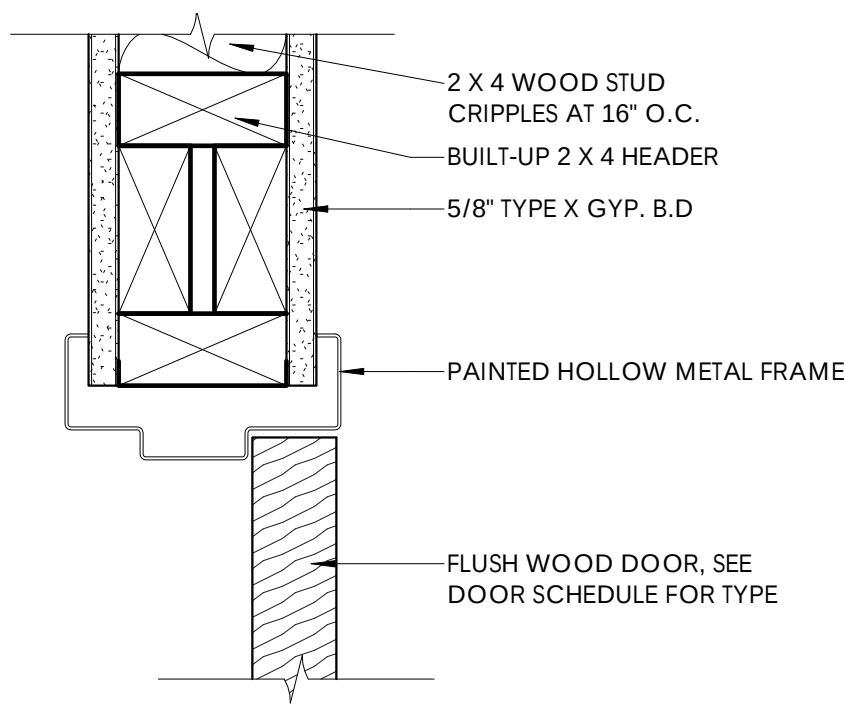


A4
A7.02
TYPICAL INTERIOR DOOR HEAD
3" = 1'-0"

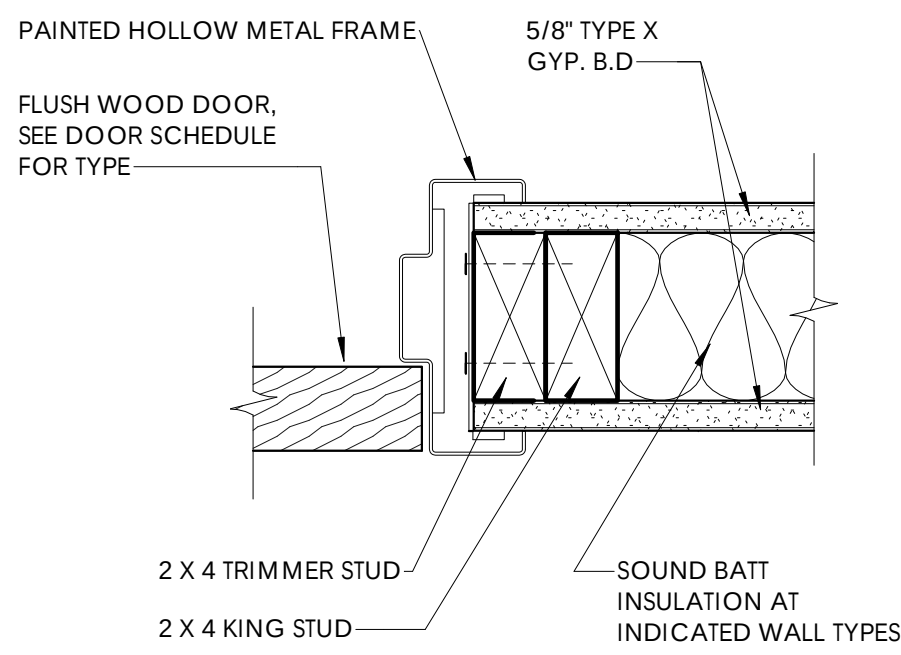


B4
A7.02
TYPICAL INTERIOR DOOR JAMB
3" = 1'-0"

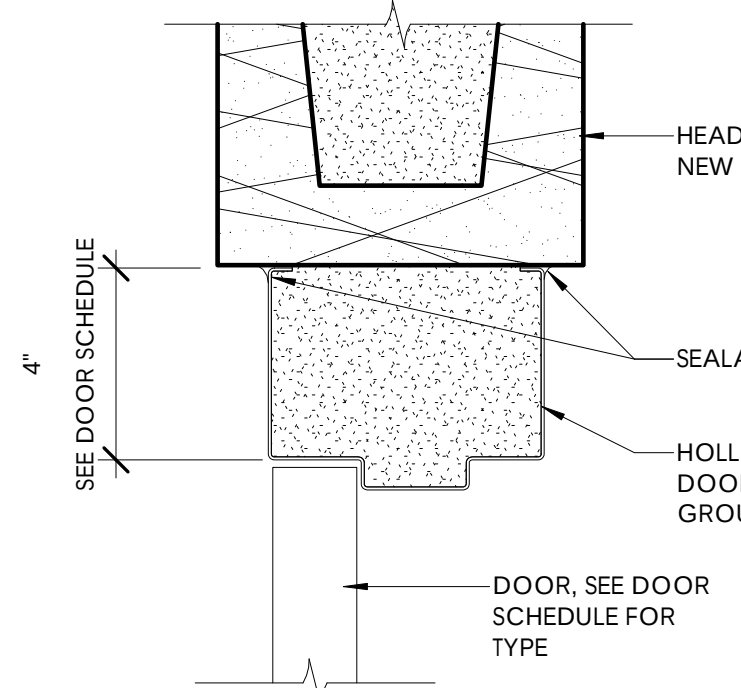


A3
A7.02
DOOR HEAD @ EXTERIOR BLOCK WALL
3" = 1'-0"

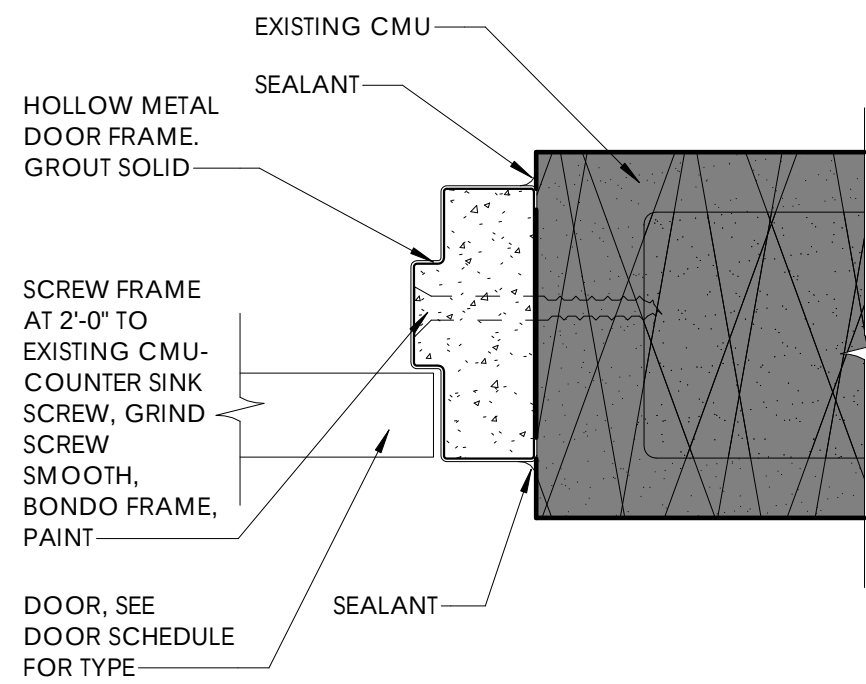


B3
A7.02
DOOR JAMB @ EXTERIOR BLOCK WALL
3" = 1'-0"

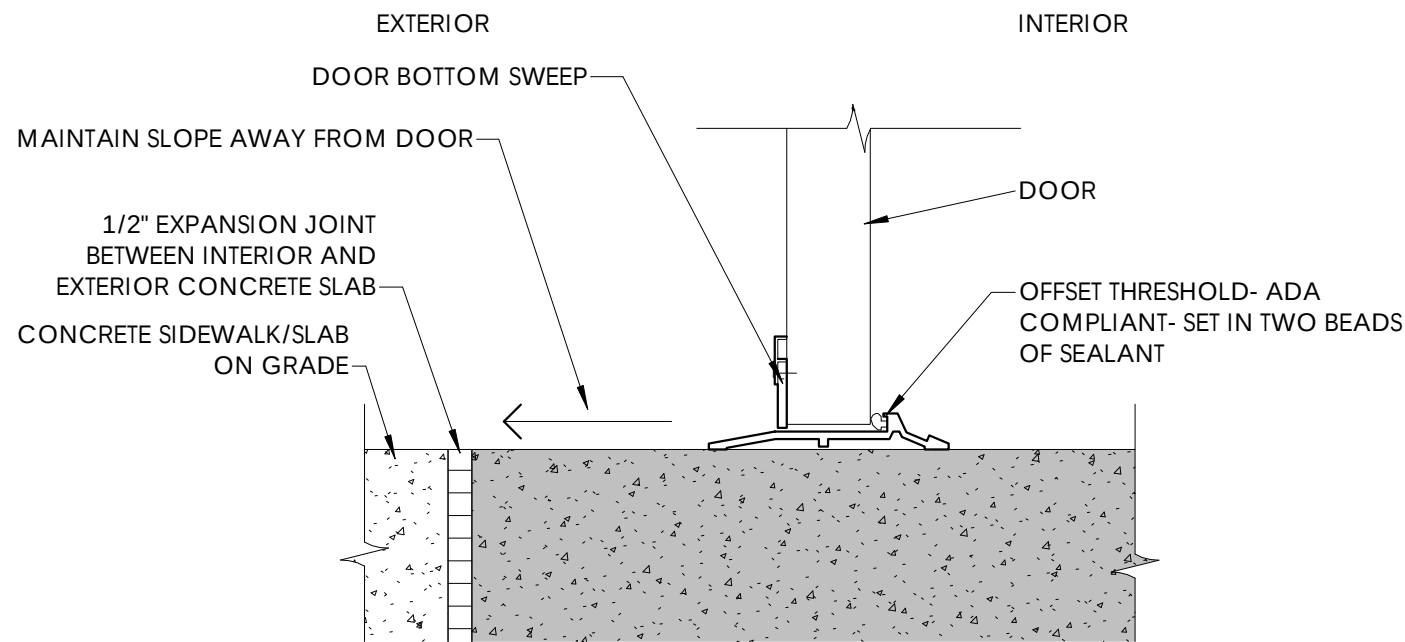


C3
A7.02
TYPICAL SWING DOOR SILL
3" = 1'-0"

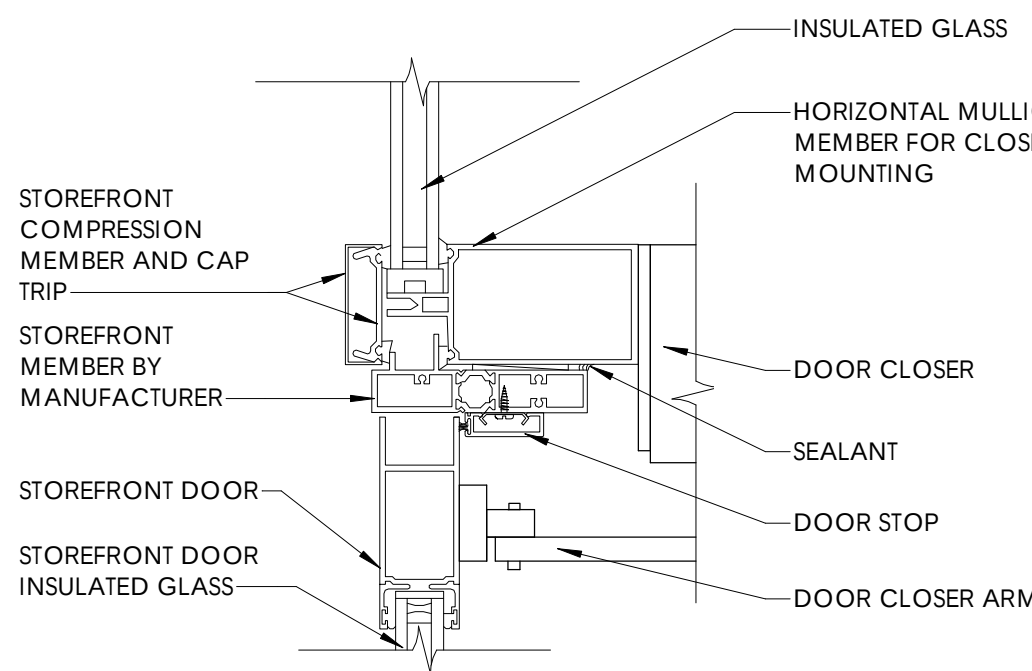


A2
A7.02
TYPICAL STOREFRONT DOOR HEAD
3" = 1'-0"

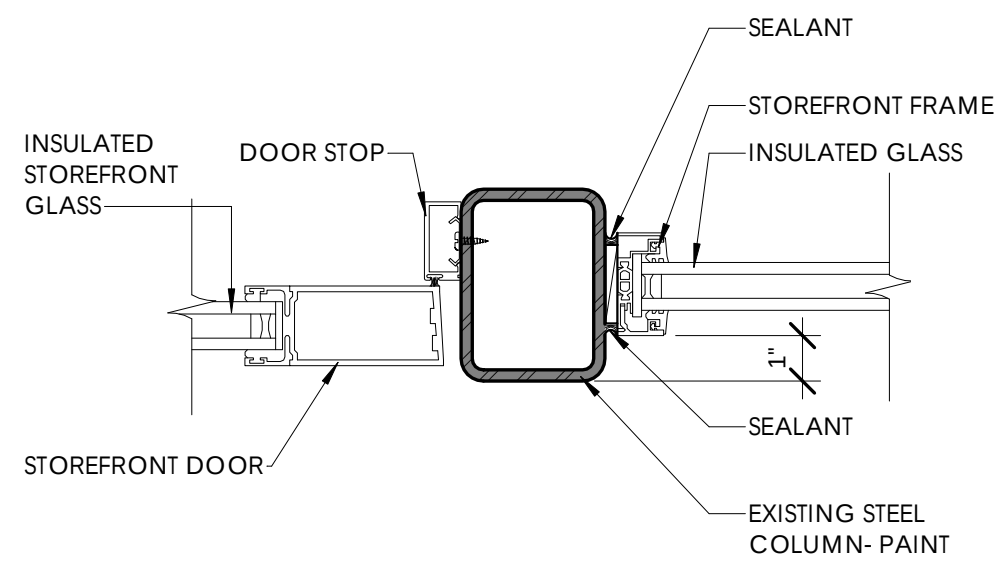


B2
A7.02
STOREFRONT DOOR JAMB
3" = 1'-0"

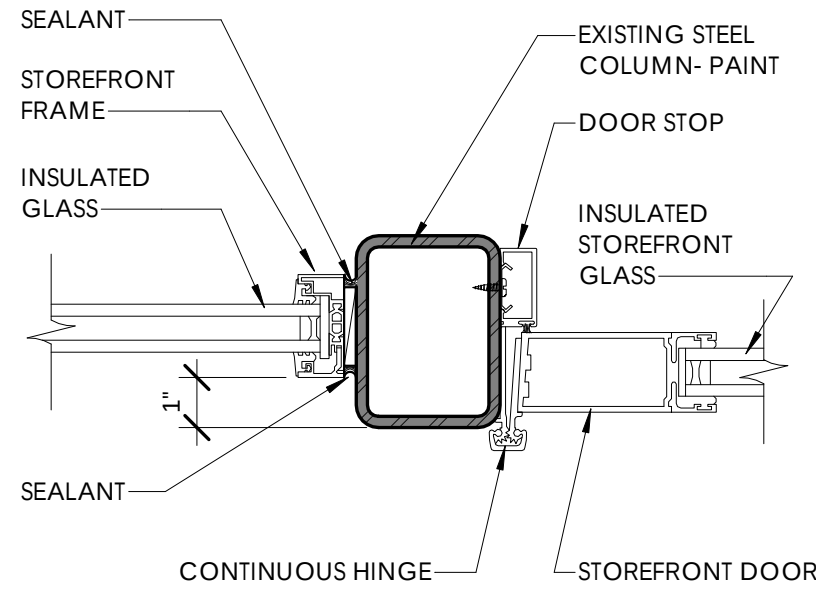


C2
A7.02
STOREFRONT DOOR JAMB @ HINGE
3" = 1'-0"

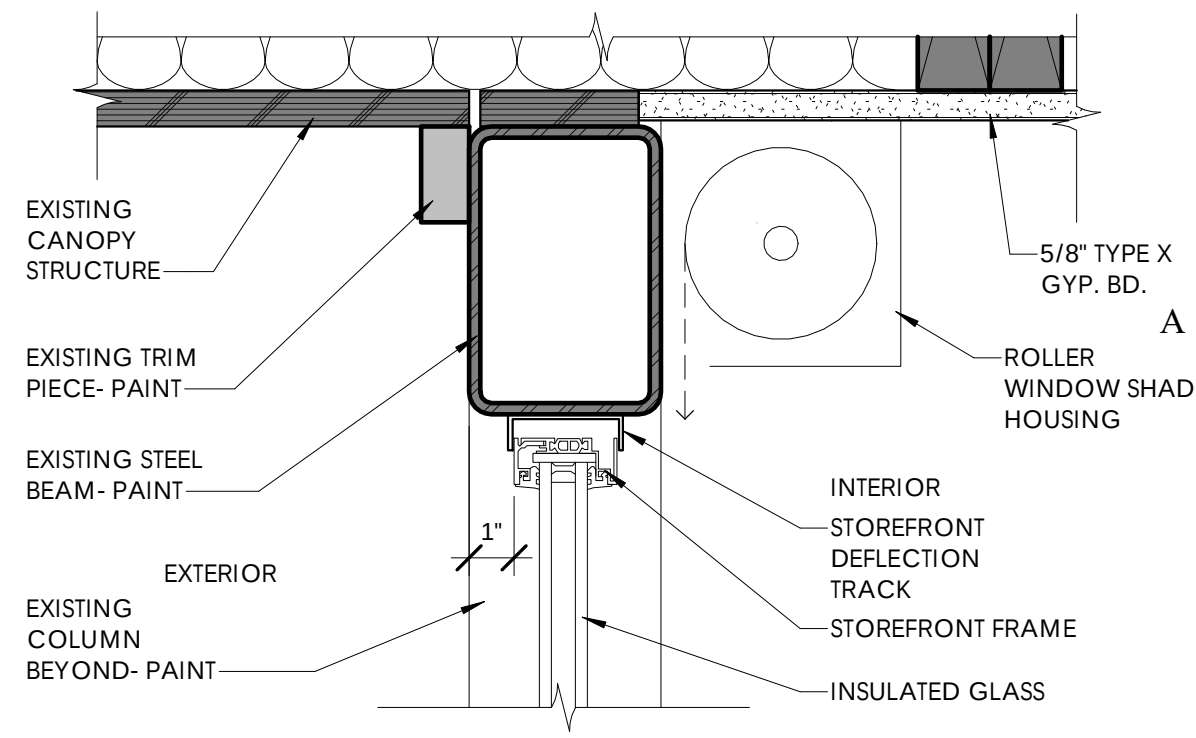


A1
A7.02
TYPICAL LOBBY WINDOW HEAD
3" = 1'-0"

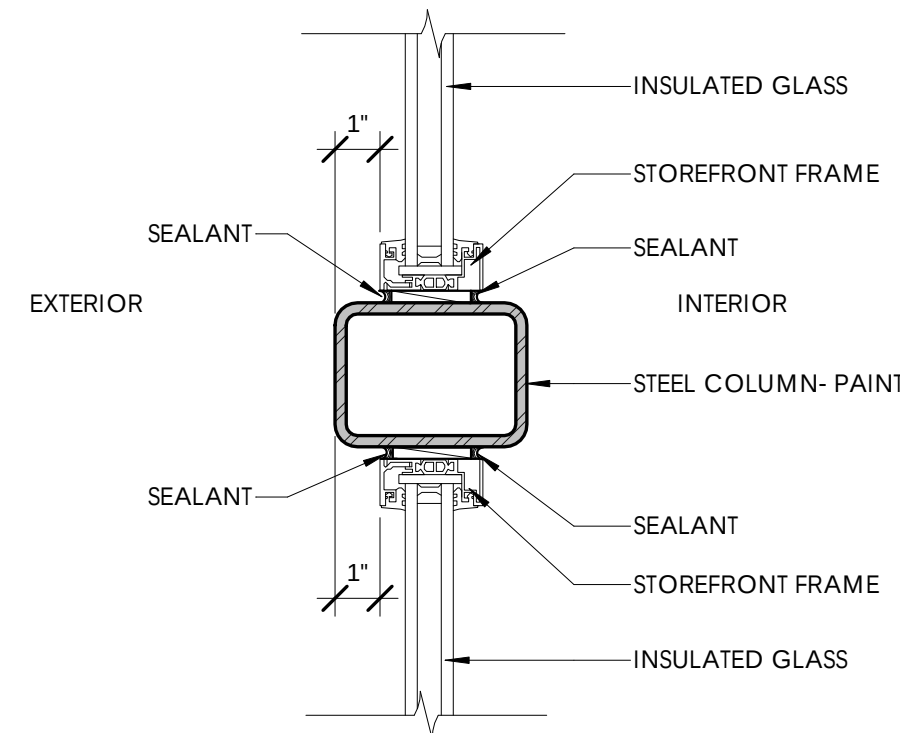


B1
A7.02
TYPICAL LOBBY WINDOW JAMB
3" = 1'-0"

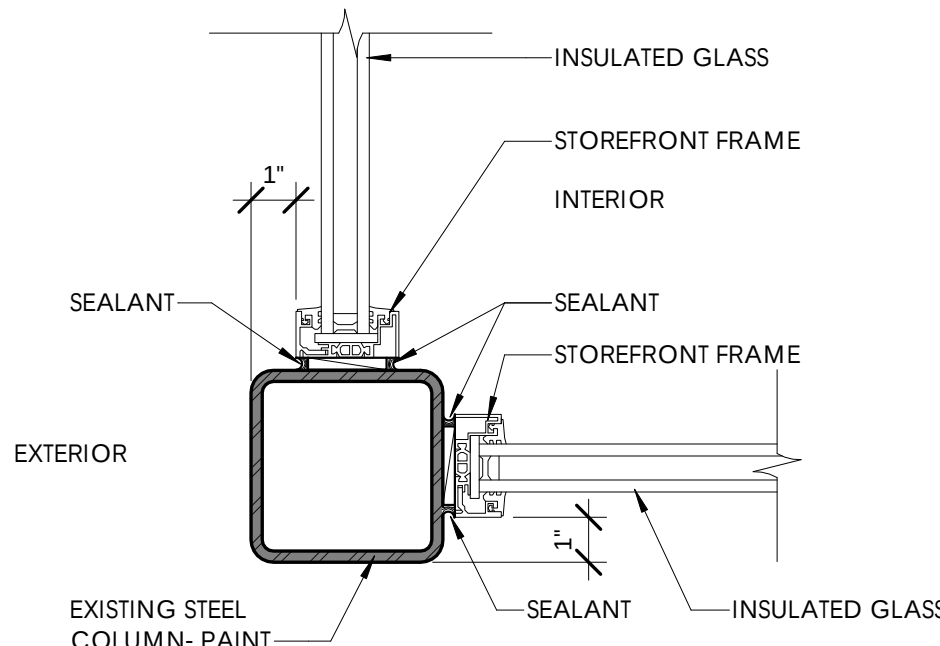


C1
A7.02
TYPICAL LOBBY WINDOW JAMB @ CORNER
3" = 1'-0"

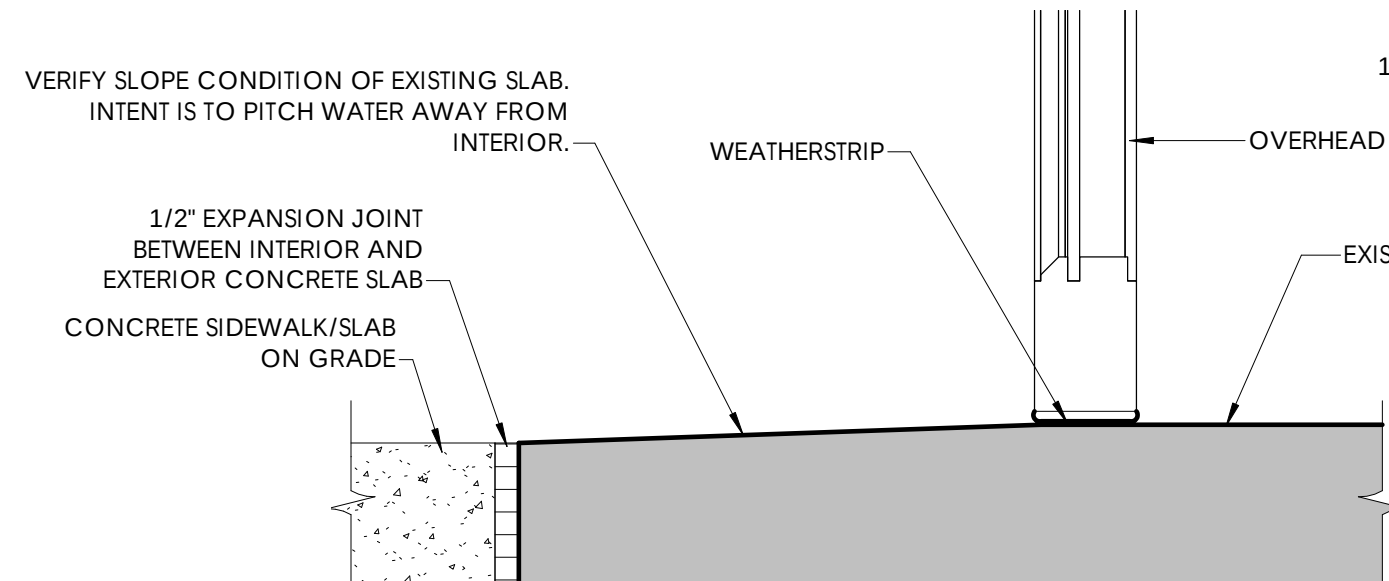


D5
A7.02
OVERHEAD DOOR SILL
3" = 1'-0"

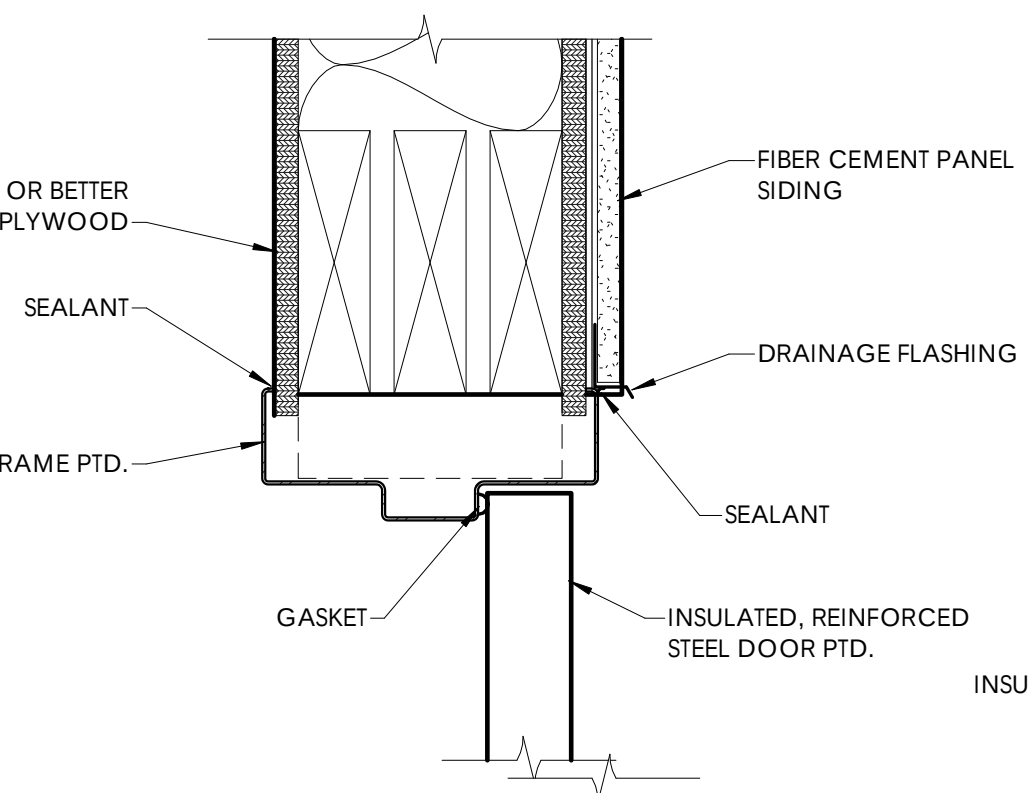


D4
A7.02
PATIO BAR DOOR HEAD
3" = 1'-0"

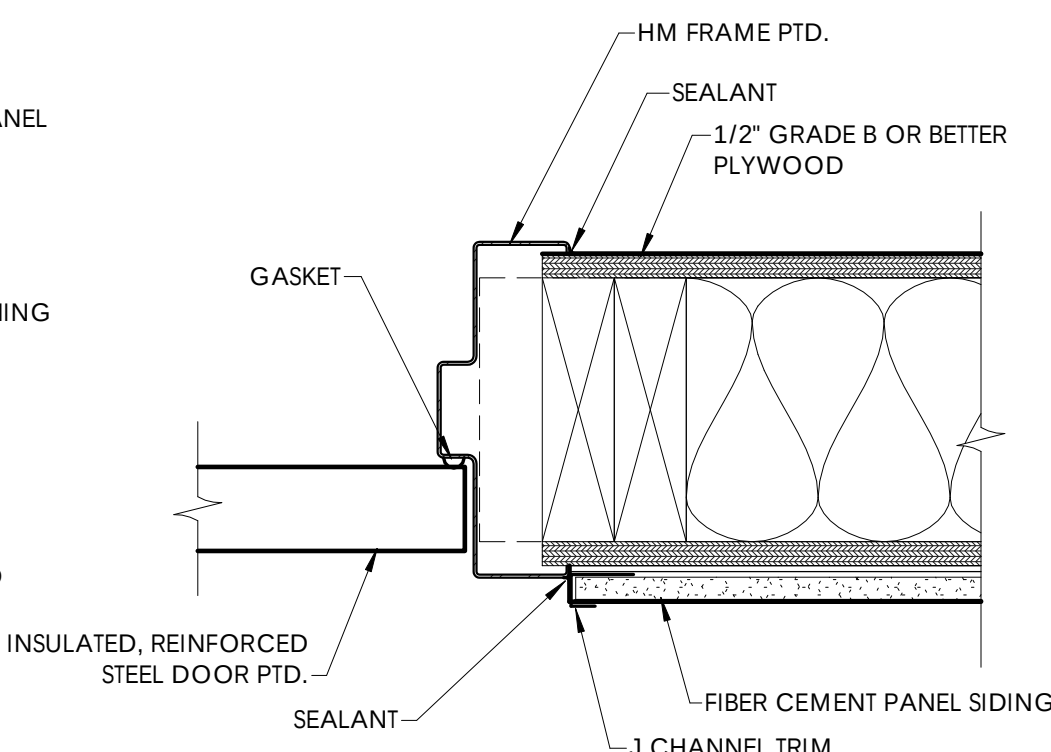

D3
A7.02
PATIO BAR DOOR JAMB
3" = 1'-0"

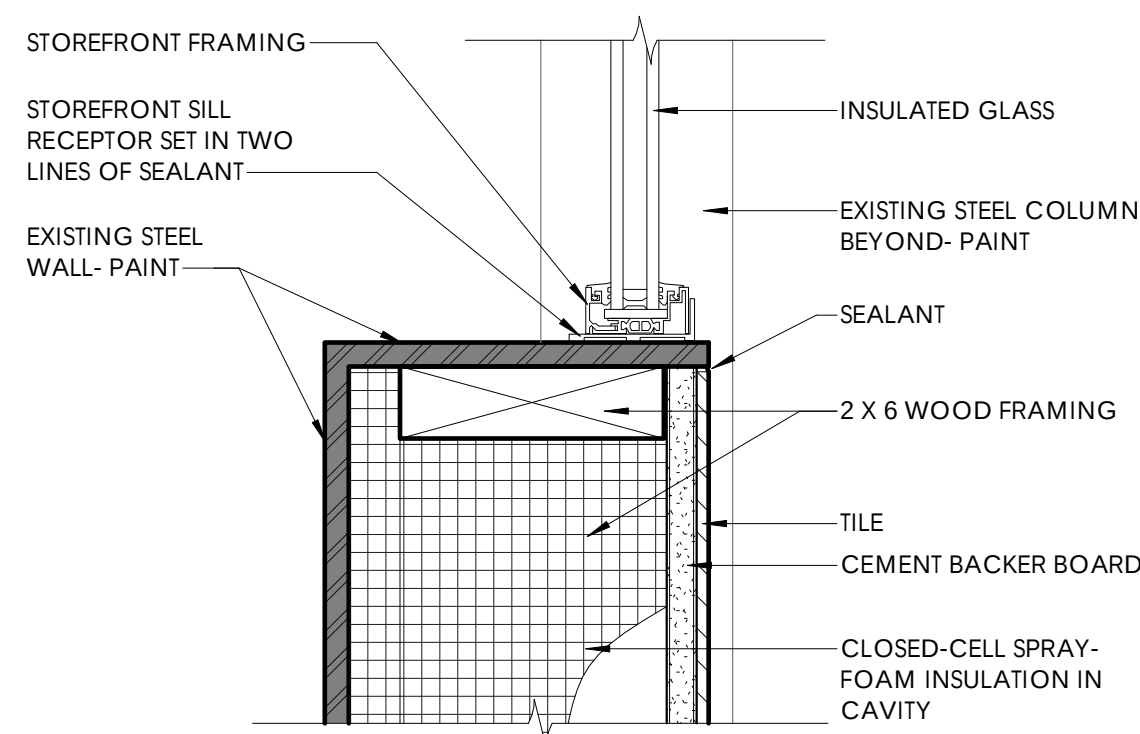

D2
A7.02
LOBBY WINDOW SILL AT KNEE WALL
3" = 1'-0"

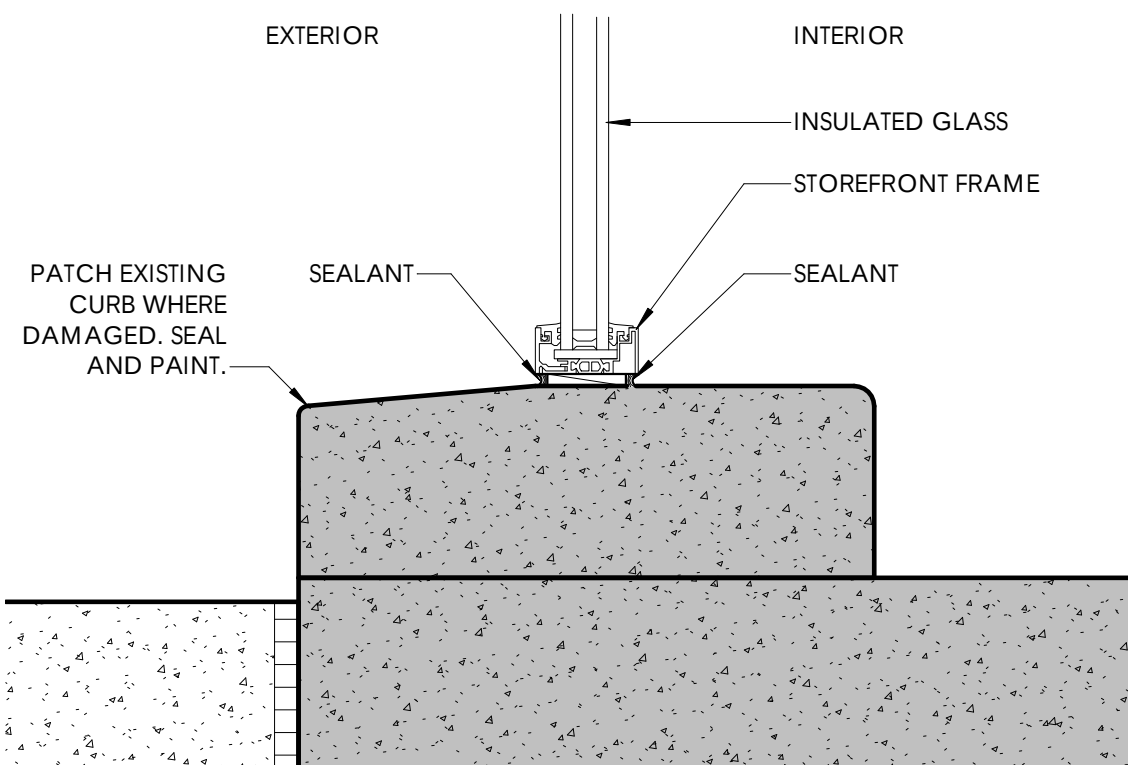

D1
A7.02
LOBBY WINDOW SILL
3" = 1'-0"



INTEGRATING NATURE
AND ARCHITECTURE

BBN
ARCHITECTS
INC.

228 POYNTZ AVENUE
MANHATTAN, KANSAS 66502
PH: 785-776-4912
WWW.BBNARCHITECTS.COM

Information provided on the drawings regarding existing conditions has been obtained from the best sources available, but cannot be guaranteed in all respects. Contractor shall verify all such information prior to proceeding with any new work that may be affected. Include as part of the contract all work required to produce the indicated result. All drawings and written material appearing herein constitute the original and unpublished work of the Architect, and same may not be duplicated, used or disclosed without the written consent of the Architect.

REV	DESCRIPTION	DATE
-----	-------------	------

BID SET

Project Number: **19013B**

Date: **5/25/2022**

Project Name:

**PARKSIDE
RESTAURANT**

Project Address:
**1026 POYNTZ AVE.
MANHATTAN, KS 66502**

Sheet Title:

**DOOR &
WINDOW
DETAILS**

Sheet:

A7.02

Of:



Interior of garage looking south, 2022



Interior of garage looking north, 2022



Interior of lobby looking north, 2022



Interior of lobby looking south, 2022



Garage bays (west façade), 2022



Interior of garage looking south, 2022



Back of building, 2022



South overhang, 2022



South overhang, 2022



South and west overhangs, 2022



West façade looking southeast, 2022



Site Rendering Overview



Site rendering, south overhang



Site rendering, looking north



Site rendering, looking east

United States Department of the Interior
National Park Service

National Register of Historic Places Registration Form

This form is for use in nominating or requesting determinations for individual properties and districts. See instructions in National Register Bulletin, *How to Complete the National Register of Historic Places Registration Form*. If any item does not apply to the property being documented, enter "N/A" for "not applicable." For functions, architectural classification, materials, and areas of significance, enter only categories and subcategories from the instructions. Place additional certification comments, entries, and narrative items on continuation sheets if needed (NPS Form 10-900a).

1. Name of Property

Historic name Dawson's Conoco Service Station

Other names/site number Parkside Conoco Station, khri# 161-2074

Name of related Multiple Property Listing Roadside Kansas

2. Location

Street & number 1026 Poyntz Avenue

n/a

not for publication

City or town Manhattan

n/a

vicinity

State Kansas Code KS County Riley Code 161 Zip code 66502


3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act, as amended,

I hereby certify that this x nomination request for determination of eligibility meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60.

In my opinion, the property meets does not meet the National Register Criteria. I recommend that this property be considered significant at the following level(s) of significance:

national statewide local Applicable National Register Criteria: x A B X C D

 Signature of certifying official/Title Patrick Zollner, Deputy SHPO

8-17-21
Date

Kansas State Historical Society
State or Federal agency/bureau or Tribal Government

In my opinion, the property meets does not meet the National Register criteria.

National Register listed September 30, 2021

Signature of commenting official

Date

Title

State or Federal agency/bureau or Tribal Government

4. National Park Service Certification

I hereby certify that this property is:

 entered in the National Register

 determined eligible for the National Register

 determined not eligible for the National Register

 removed from the National Register

 other (explain:)

Signature of the Keeper

Date of Action

Dawson's Conoco Service Station

Name of Property

Riley Co, Kansas

County and State

5. Classification

Ownership of Property

(Check as many boxes as apply.)

☒	private
☐	public - Local
☐	public - State
☐	public - Federal

Category of Property

(Check only **one** box.)

☒	building(s)
☐	district
☐	site
☐	structure
☐	object

Number of Resources within Property

(Do not include previously listed resources in the count.)

Contributing	Noncontributing	
1		buildings
		sites
		structures
		objects
1	0	Total

Number of contributing resources previously listed in the National Register

0

6. Function or Use

Historic Functions

(Enter categories from instructions.)

COMMERCIAL: Specialty Store

Current Functions

(Enter categories from instructions.)

VACANT/NOT IN USE

7. Description

Architectural Classification

(Enter categories from instructions.)

MODERN MOVEMENT

Materials

(Enter categories from instructions.)

foundation: CONCRETE

walls: CONCRETE

roof: SYNTHETIC

other:

Dawson's Conoco Service Station
Name of Property

Riley Co, Kansas
County and State

Narrative Description

Summary

Dawson's Conoco Service Station is located on Lots 447 & 448, Ward 4 at 1026 Poyntz Avenue in Manhattan, Riley County, Kansas, at the northeast corner of Eleventh Street and Poyntz Avenue across from Manhattan's City Park. The corner lot was the site of a former Conoco Gas Station (1925). Continental Oil Company purchased an adjacent lot in 1965, demolished the original station, and built the existing service station in 1966-67. The plan is Type 09A- MAS Service Station Building of the Continental Oil Company, Marketing Department, Houston Texas, dated October 13, 1963, with details and revisions through 1966. These plans clearly reflect the original design of the Manhattan Conoco Station filed with Building Permit #07979, City of Manhattan July 19, 1966, to be built at an estimated cost of \$42,000.

The corporate plans of Conoco detailed not only the building design but also the site layout, canopies, lighting, interior shelving, signage, and merchandising. The station was a simple rectangular form comprised of two sections of varied height; the rear garage being taller than the storefront. The front salesroom, facing Poyntz Avenue, was an aluminum-framed glass storefront with single doors on the west and south sides. Customer restrooms were accessed from outside, on the east side of the salesroom. The garage/service area is a concrete block structure with steel I-beams supporting the overhead doors at the three garage bays. Although utilitarian in design and function, the garage/service area had abundant natural light. The three garage doors were predominantly glass with an aluminum lower pane, and three skylights were located across the east side of the shop above the workbenches. The salesroom had a heightened level of finish with painted concrete block in a stacked bond pattern and vinyl tile flooring. The station design is characterized by the large canopies soaring out from the west and south sides of the salesroom upward toward the streets beyond. Arc pole lights stretched toward the canopies from the NW and SE corners of the site, and strip lighting around the canopies and building enhanced this simple horizontal Modern design. The building retains a very high degree of integrity with original features, including the extant canopies and arc lights.

Elaboration

Location and Setting

Dawson's Conoco Service Station is located east of Manhattan's City Park at the northeast corner of Eleventh Street and Poyntz Avenue. The 100' x 150' parcel consists of two lots (Lots 447-448) in Manhattan's Ward 4, addressed at 1026 Poyntz Avenue (formerly 1030 Poyntz), six blocks west of Manhattan's downtown business district. The parcel took its current form in 1966 when Conoco purchased Lot 447 to expand the site of the 1925 Conoco station located on Lot 447 at the corner of Eleventh and Poyntz. The existing building was constructed on the newly expanded site in 1966-1967.

The rectangular building is oriented north/south with the front of the station (short side of the rectangular form), facing south fronting Poyntz Avenue. Centrally located on the parcel, the garage bays face west fronting Eleventh Street opposite the city park. Poyntz Avenue is a four-lane east/west thoroughfare that at the time of construction, was U.S. Highway 24/40 through downtown Manhattan. The construction of a downtown shopping mall in 1987 re-routed through-town traffic with a southern bypass, but Poyntz Avenue remains the primary east/west route through downtown Manhattan. Eleventh Street bisects Poyntz west of downtown and extends north to the Aggieville business district and Kansas State University. Manhattan's City Park is located immediately west of the station, an active recreational park for residents, visitors, and students. The Eleventh and Poyntz intersection is a busy vehicular intersection with pedestrian crosswalks and perimeter sidewalks on the west and south sides of the property. There are curb cuts on the south and west sides, and the site is accessible from the north via a rear alley. The west and south sides of the site are paved, with the east and north sides being gravel; there is no landscaping on this corner lot.

The primary site features are two large canopies that extend from the rectangular building, on the west and south originally each covering a gas pump island. Two arc pole lights are in place at the SE and NW corners

Dawson's Conoco Service Station

Name of Property

Riley Co, Kansas

County and State

of the site generally aligning with the height of the canopies. The canopies and pole lights are illustrated on the original Conoco plans for the station and documented as original to the building's 1966-67 construction. The canopies and arc lights remain, but the gas pumps were removed ca. 2016.

A simple one-story commercial building is located on Lot 446 east of the service station with a paved lot and no distinction of a property line between the two parcels. The existing building at 1018 Poyntz was constructed in 1972 on Lot 446 and now houses Little Batch Company, a locally owned commercial bakery that opened in 2021. The owner of the bakery also owns the service station parcel with plans to expand, adding a retail bakery and coffee shop in the Conoco Station building. These two parcels Lot 446 and Lots 447-448, were first jointly owned in 1994 when Ruth Schrum, who owned Lot 446 (since 1984), purchased the adjacent west parcel - Lots 447-448 (the Conoco Station at 1026 Poyntz). Because the two parcels were not historically associated at the time of construction and operation of the Conoco Service Station, this nomination pertains only to the Conoco Service Station at 1026 Poyntz Ave (Lots 447-448).

Exterior

The one-story rectangular building measures 27'4" x 65'5" and is comprised of two parts – the front salesroom on the south and the rear garage/service area on the north. The garage occupies approximately the northern two-thirds of the building, a simple concrete block building with a flat roof distinguished by three garage bays on the west side. The rear garage rises above the salesroom by approximately two feet, both parts having flat roofs. The front/south third of the building is a short square form with an aluminum-framed glass storefront and simple boxed cornice/cap that projects slightly from the building facade with strip lighting beneath. Two large horizontal canopies sweep from the storefront to the south and west, angling upward toward the streets. The canopies extend from the building facade above the storefront cap and are supported by two round metal columns fifteen feet from the building (the columns, originally framing the gas pump islands). On the west, the canopy is rectangular in form, but the south canopy is a rhomboid form angling from the south facade toward the west.

The storefront is raised on a concrete curb with full-height aluminum-framed glass panes. The configuration of the south and west facades is asymmetrical, with a single glass door on each facade and one partial-height glass pane with a tire cabinet beneath. Square metal columns frame the storefront bay and the three garage bays on the west facade of the north end of the building. Historically, the east side of the salesroom housed the customer restrooms accessed from the exterior. The east side of the salesroom is painted concrete block laid in a stacked bond (interior and exterior) with unadorned punched door openings. A recessed corridor led to the women's restroom, and an adjacent slab metal door provided direct access into the men's restroom. At some point in the building's past, the two restrooms were combined accessed by the single door on the east facade. The recessed corridor now provides maintenance access only.

The rear garage is a simple rectangular form that rises approximately two feet above the south storefront bay. The garage is painted concrete block laid in a running bond with a single man door on the north/rear facade. The block walls have a simple metal cap and a gutter with downspouts at each end of the east facade; there are no openings on the east side of the garage. The west facade of the garage, fronting Eleventh Street, is comprised of three garage bays with multi-light metal-framed glass garage doors with metal lower panes.

The exterior of the building is distinguished by its horizontal form, which is accented by contrasting banding and strip lighting along both sections of the building and canopies. A simple metal cornice band on the building and fascia of the canopies are painted red, as is the storefront frame. Also painted Conoco red are the metal columns supporting the canopies and framing the storefront and garage bays. The concrete block building is painted white but features subtle distinctions such as the variation in a bond pattern on the front and rear parts of the building. The garage doors and storefronts are predominantly glass, creating a light transparent feel with the horizontal banding almost floating while the angled canopies soar from the storefront to the streets. The arc lights bow toward the canopies, further highlight the low horizontal lines of the entire property. Sign permits document three changes in building/business signage, including two styles of the Conoco pedestal

Dawson's Conoco Service Station

Name of Property

Riley Co, Kansas

County and State

sign. All business signs have formerly been removed. The building clearly conveys its original design - the epitome of a 1960s Modern service station.

Interior

Like the exterior, the interior of Dawson's Conoco Service Station reflects the original design documented in drawings labeled "Type 09A- MAS Service Station Building, Continental Oil Company, Marketing Department, Houston Texas," dated October 14, 1963, with details and revisions through 1966.¹ These plans clearly reflect the existing station completed in 1967 at an estimated cost of \$42,000.

As was typical with Modern service stations, the building had two distinct parts – the front of house or salesroom and the rear garage and service area. The two parts are defined by function, with the service area having utilitarian finishes, service tools, equipment, and parts storage. The salesroom is also characterized by function with corporate-dictated facilities, including a waiting room with a water cooler, bottled drinks, candy, and restrooms, all designed to serve the customer. Throughout both areas, the ceilings are gypsum board, and walls are painted concrete. Concrete floors are exposed in the garage, but the vinyl tile was installed in the salesroom. The only exposed partition walls in the salesroom are the glass storefront enclosure at the office and the painted block wall of the restrooms and storage room.

The garage has exposed block walls around the perimeter with workbench and base cabinets along the rear wall with tire racks above. Three skylights pierce the flat ceiling to provide natural lighting along the east side of the garage. The garage area is characterized by its open nature and utilitarian finishes with ceiling-mounted heating units, fluorescent lighting, and exposed conduit and wiring throughout. The three garage bays are framed by steel beams on the ceiling that support the overhead doors. On the original plans, the south two bays were labeled lubrication while the north bay was labeled washing. Precise functions may have changed over the years as the lift, and recessed drain is now present in the southern-most bay.

The sales room was clearly characterized by its open, glass enclosure and by corporate-designed shelving, displays, and signage. The original plans illustrate shelving units at storefront walls. The two storefront panels with opaque lower panels (versus full-height glass) mark the original location of tire cabinets. All shelving units have been removed, leaving an open salesroom and a large open garage and service area. The original driveway signal bell remains.

The property has a remarkably high level of historic integrity, with only minor changes since its completion in 1967. The station itself maintains its integrity of design, materials, and workmanship, closely reflecting its original design as evidenced by original plans. The site retains its integrity of location, setting, feeling, and association as it continues to convey its origins as a Modern corner service station.

¹ The original design documents were on file with the Building Permit #07979, City of Manhattan, July 19, 1966.

Dawson's Conoco Service Station

Name of Property

Riley Co, Kansas

County and State

8. Statement of Significance

Applicable National Register Criteria

(Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing.)

☒ A Property is associated with events that have made a significant contribution to the broad patterns of our history.

☐ B Property is associated with the lives of persons significant in our past.

☒ C Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.

☐ D Property has yielded, or is likely to yield, information important in prehistory or history.

Criteria Considerations

(Mark "x" in all the boxes that apply.)

Property is:

☐ A Owned by a religious institution or used for religious purposes.

☐ B removed from its original location.

☐ C a birthplace or grave.

☐ D a cemetery.

☐ E a reconstructed building, object, or structure.

☐ F a commemorative property.

☐ G less than 50 years old or achieving significance within the past 50 years.

Areas of Significance

COMMERCE

ARCHITECTURE

Period of Significance

1967

Significant Dates

Significant Person

(Complete only if Criterion B is marked above.)

Cultural Affiliation

Architect/Builder

Fred MacLean (Conoco Engineer)

Period of Significance (justification)

The period of significance is 1967, the date of station's construction.

Criteria Considerations (justification)

None

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

Narrative Statement of Significance

Summary

Dawson's Conoco Service Station, located at the corner of Poyntz Avenue and Eleventh Street in Manhattan, Kansas, was constructed in 1967 by the Continental Oil Company (Conoco). The station sits across the street from Manhattan's City Park and fronts one of the City's main thoroughfares. Conoco chose the site because of its strategic location along a major highway running across the state (former U.S. 40). The Modern design of the station exhibits a high degree of historic and architectural integrity, qualifying it to be listed in the National Register under *Roadside Kansas Multiple Property Document Form (MPDF)* under Criteria A: Commerce and C: Architecture. The station was built on Conoco's Modern Service Station Plan No. 9A (1963), reflecting the company's efforts to meet the changing consumer needs and desires in the mid-twentieth century.

Elaboration

At the founding of the City of Manhattan in 1857, early residents named one of the major thoroughfares after Col. John Poyntz, a man who had supported their cause. Manhattan quickly grew into a bustling town with its commercial core centered around Second Street and Poyntz Avenue, and an area dedicated for a park near the city center at Poyntz and Eleventh. Agriculture played a primary role in the city's economy, while the Kansas State Agricultural College increasingly drew in students and businesses to support them.

In 1913, Manhattan was connected to Fort Riley by interurban railway, but the greatest force of change was the ever-increasing popularity of the automobile. In eighteen months in 1913-1914, over ninety thousand cars were registered in Kansas.² Two years later, there was an automobile for every 22.5 people in the state. Manhattanites were quick to adopt the new technology, creating problems and opportunities in the city. As early as 1907, the city council set speed limits at ten miles per hour in the business district and twelve in residential areas; followed by a requirement to register vehicles.³ In 1910, Riley County sold 3,500 motor licenses.⁴ The city paved sixty miles of roads with brick, including Poyntz Ave from the Big Blue River to the courthouse. The city had begun the twentieth century with a population of just over 3,400, a number that would grow to almost 8,000 by 1920 in addition to 3,400 students.⁵ Two years later, the city had grown faster than any other urban area in Kansas to a population of 10,000 without counting the student population.⁶

Prior to 1910, Kansas had no paved roads and few surfaced roads of any kind. As automobile numbers increased, so did the demand for safe, passable roads across the state. Vehicle owners founded the Good Roads Movement to promote the economic benefits of better roads for farmers by improving their access to markets and cross-state tourist travel. One of the first was opened in June 1912 when the old military road was designated the "Golden Belt Highway" from Kansas City to Denver with its promotion, maintenance, and improvements coordinated by private town boosters along the route. The highway ran through the heart of cities across Kansas, including Manhattan. In 1916, supporters promoted the road to tourists claiming the shortest, straightest, and easiest grade road between Kansas City and Denver, Colorado. The highway ran through Manhattan as Poyntz Avenue. A decade later the road became U.S. 40 and was promoted to visitors with a brochure titled, "U.S. 40: The Main Street of America" showing routes on the newly designated federal

² Craig Miner. *Kansas: A History of the State, 1854-2000*. Lawrence, KS: University Press of Kansas, 2002.192.

³ James E. Sherow. *Manhattan*. Charleston, SC: Arcadia. 2013. 48.

⁴ Lowell Jack. *A History of Manhattan, Kansas, Riley County and Fort Riley*. Manhattan, KS: Hawley Printing. 2003, 21.

⁵ Sherow, 41.

⁶ *Manhattan Republic*. 4 Oct 1923, 5.

Dawson's Conoco Service Station

Name of Property

Riley County, Kansas

County and State

highway system and highlighting features such as city parks.⁷ The new roads were a boom to towns and cities, bringing in tourists and travelers, and increasing the need for gas stations.

By 1923, Kansans owned just under 350,000 cars and 26,400 trucks which consumed over 158,000 gallons of fuel annually.⁸ Seven years later, seventy-five percent of Kansas households owned at least one automobile.⁹ Filling and service stations began appearing in Manhattan to address the demand. In 1925, Continental Oil and Transportation Company constructed "Station No. 2" at 1030 Poyntz¹⁰ on the site of the nominated property. Gulf Oil was the first oil company to recognize the utility of design as a marketing tool when it built the first architect-designed service station in Pittsburgh, PA, in 1913.¹¹ The brick structure offered free air, water, restrooms and had a lighted sign. By 1920 there were 1,200 service stations in the United States; a number that grew to 236,000 by the end of the 1960s.¹²

Isaac Elder Blake founded the Continental Oil and Transportation Company in Ogden, Utah in 1875. Upon its formation, Blake stated the company's objectives as "producing, purchasing, refining, transporting, selling, delivering and dealing in petroleum, and in all its products of every kind."¹³ By 1913, there were 1.7M automobiles across the country, and Continental seized the opportunity by adding oil exploration and the building of pipelines to their corporate planning.¹⁴

Continental Oil would continue to be a leader in the booming industry by constructing the first filling station in the Western United States in 1909. Within twenty years, Continental established more than 1,000 service stations in fifteen states, including Kansas, each emblazoned with the company trademark.¹⁵ In 1929, Continental merged with Marland Oil, adding capacity and retail markets. Continental Oil Company became "Conoco" with an inverted red equilateral triangle with a horizontal red bar with the company's name in white block letters as their logo.¹⁶

Conoco distinguished itself by offering a variety of products and services from its inception. In the late 1920s, Conoco advertised tires, gasoline, and travel under the new logo in the Manhattan newspapers.¹⁷ The firm was adept at marketing, always keeping a watchful eye on consumer needs and the bottom line. *Fortune Magazine* called the company an "aggressive merchandizer."¹⁸ In 1930, Conoco began offering free personalized travel services to motorists.¹⁹ The service was designed to encourage tourists to travel "Conocoland;" an area linking Conoco stations across several states throughout Midwest and Western United

⁷ U.S. 40 *The Main Street of America* Highway Brochure, n.p., n.d. Accessed online 29 Apr 2021 at <http://www.kansasmemory.org/item/1624>.

⁸ Thom Rosenblum. *Hughes Conoco Service Station National Register Nomination*. Washington, DC: National Parks Service. 2011. 7.

⁹ Ibid, 7.

¹⁰ The address shifted to 1026 Poyntz in 1988. Manhattan's first Conoco station was in Aggieville at 1300 Laramie. *Manhattan Mercury*. 10 Jun 1930, 2.

¹¹ John A. Jakle. "The American Gasoline Station, 1920-1970." *Journal of American Culture*. Bowling Green, OH, 1978, 521.

¹² Ibid, 521.

¹³ Conoco: The First One Hundred Years." New York, NY: Dell Publishing, 1975. 13.

¹⁴ Continental Oil was under the umbrella of Standard Oil Company from 1885-1913, when the Supreme Court ordered the breakup of Standard Oil.

¹⁵ [ConocoPhillips.com](http://www.conocophillips.com). "Our History: 1875-1909," accessed online on 20 April 2021 at <https://www.conocophillips.com/about-us/our-history/1909-1875/>.

¹⁶ W. Wayne Jones. *A Field Guide to Gas Stations in Texas*. Historical Report No. 2003-03. Austin, TX: Texas Department of Transportation, updated 2016, 53. The design was adapted from that of Marland Oil Company following the merger of the two companies.

¹⁷ *Manhattan Mercury*. 3 Sep 1929, 5; and *The Morning Chronicle*. 10 Sep 1929, 5.

¹⁸ Conoco: The First One Hundred Years." 143.

¹⁹ Conoco would continue the free travel service through 1970.

Dawson's Conoco Service Station

Name of Property

Riley County, Kansas

County and State

States. In 1931, newspaper advertisements declared, "40,000 Conoco Passport holders are on vacation highways."²⁰ Conoco's efforts in supporting local tourism included postcards, some of which were of Conoco stations while others were of sites deemed of interest to tourists. In Manhattan, this included a picture of the Formal Gardens at Kansas State College.²¹

As the post-World War II (WWII) economy boomed, Americans had more disposable income and desired to live and shop in the suburbs. Downtowns struggled against suburban shopping malls such as West Loop Shopping Center constructed on the west side of Manhattan in 1962. Downtown countered by highlighting the advantages of local businesses and tourist attractions. For Manhattan, the two main attractions were the college and the city park. In 1955, retired Kansas State University professor George Filingier would create a legendary icon to help celebrate the centennial of Manhattan.²² Unveiled on May 15, 1966, the thirty-foot-tall Johnny Kaw statue, positioned at the southeast corner of Manhattan's City Park, became an instant tourist attraction as well as a rally location for city events and local groups. Dawson's Conoco Service Station located across Eleventh Street from the statue surely benefited from the crowds drawn to see the attraction and participate in local events. Johnny Kaw was marketed by the Manhattan Central Business District Association as one of the places to see in Downtown Manhattan in its "Vacation Time" campaign.²³

To remain competitive in the gasoline industry, Conoco, like its competitors, sought to control costs by owning stations and marketing to the masses. Uniform design helped to build brand recognition and loyalty. While companies often chose to lease stations, corporate regulations regarding standardized building types, uniform color schemes and signage was maintained through lease agreements.²⁴

In the early 1960s the Wallace Dearborn family owned the property at 1030 Poyntz (later addressed as 1026 Poyntz) and sold it to the Continental Oil Company in 1965. Conoco retained ownership until 1977, when the property was sold to Wilbur and Sharon Hunter. Through the years, the Conoco franchise was leased. Warren E. Dawson (1916-1989) operated Dawson's Conoco from 1956 to 1969, the period in which the new (existing) station was constructed. Dawson's advertisements in Manhattan city directories offered, "tires and batteries, sales and service, motor tune-up, brake service and wheel balancing."²⁵

In 1963, there were thirty-six gas stations in Manhattan. Conoco seized the opportunity to rebuild Dawson's Conoco and stand out among the competition. The company submitted plans to the City of Manhattan to replace the existing station at 1030 Poyntz with a Modern design. While much had changed, Poyntz Avenue/U.S. 40 remained a vital artery through the city, and the park-side station occupied a prime location.

The price of gasoline through the 1960s was determined by producers and refiners in each region. Gasoline was "freely exchanged between companies to reduce transportation costs."²⁶ Competition relied upon marketing and brand recognition, thus, "the standardized station was the most important advertising device by which companies sought to develop sales territories."²⁷

²⁰ *Nevada Daily Mail*. 7 Jul 1931.

²¹ "Formal Gardens, Kansas State College in Manhattan" Conoco postcard online at <http://nostalgia.esmarkid.com/conocopc079.jpg>.

²² *Manhattan Mercury*. 1 May 1966, 5.

²³ *Manhattan Mercury*. 19 May 1968, 56.

²⁴ Jakle, 521.

²⁵ Polk's Manhattan City Directory 1963. Kansas City, MO: R.L. Polk & Co. 1964. Accessed online on 29 Apr 2021 at Ancestry.com.

²⁶ Jakle, 522.

²⁷ *Ibid*, 522.

Dawson's Conoco Service Station

Name of Property

Riley County, Kansas

County and State

While little information was found detailing Conoco's gas station designs, it is well-documented that oil companies hired architects to design service stations that were universally adaptable to any region, could be erected quickly and on the cheap, and which were based on popular architectural styles of the period.²⁸

Continental Oil designed its filling stations deliberately, creating plans by which most stations would be built. Exceptions occurred as with the Aspen, Colorado station that opened July 1, 1955.²⁹ What is not known is how many Conoco stations were designed outside of the company plans. The plans for Dawson's Conoco are signed by Frederick Malcolm MacLean (1913-2004). MacLean, a U.S. Army veteran of WWII, was a petroleum and marketing engineer for Conoco; a position he held for over thirty years.³⁰ The plans are labeled "Service Station Building Type 9A," leading to the conclusion that Conoco had at least nine plans for its stations with numerous variations to fit each locality.³¹ Construction on Dawson's Conoco began in 1966 and finished in 1967.

Warren E. Dawson owned and operated the franchise station at Eleventh and Poyntz for two years following the construction of the new building. Royal L. Carlson bought the franchise in late 1969 and operated it through 1976. During the 1970s, Carlson added truck and trailer rental. In 1978, the Hunters opened Parkside Conoco & U-Haul Service, which would remain on the corner through 1994. Two years later, Cheri and Daniel Davis operated De Dee's Conoco and Davis Tire & Auto.³² Around 2006 the gas station ceased to exist, but Davis Tire & Auto remained through 2019. The property was recently purchased by Phyllis Pease, who will be expanding the existing Little Batch Co. bakery (adjacent at 1018 Poyntz) to include a bakery and coffee shop in the "Parkside Station."

Roadside Kansas

The Post-World War II Gas Station, Sub-Type of the Gas/Service Station

The oblong box form of modern gas stations first appeared in the mid-1930s when Texaco developed a new prototype that incorporated merchandise sales, gasoline pumps, and auto repair bays all under one roof. The oblong box sub-type lacked ornamentation that was prevalent on earlier stations and boasted fire-proof construction of concrete and metal. Following WWII, gas stations continued to utilize simple variations of the oblong box form adding flared rooflines or vertical pylons to identify brands and display logos. Completed in 1967, Dawson's Conoco Service Station in Manhattan was built by Conoco based on Plan Type 09A – MAS developed by Continental Oil Company's Marketing Department. The plans were approved by Engineer Fred MacLean in 1963. The complete set of plans included details for shelving units, displays, and signage inside the station, as well as the gas pump island, canopy, arc pole lights, and building signage outside, all of which were designed to provide a consistent, recognizable image of the Conoco brand. This station type was constructed of concrete block painted white with metal columns, frames, and flashing painted red. Although the "Conoco" signs have been removed, the Manhattan station retains the red banding on the building and canopies as well as the arc lights and strip lighting that emphasized the recognizable form. The Conoco canopies angled upward toward the street, designed to attract passersby, and the well-lit glass-front showroom and garage further enticed customers into a clean, modern station.

Dawson's Conoco Service Station has experienced remarkably few former alterations, retaining the original storefronts and glass garage doors, thus exhibiting a very high degree of architectural integrity. While the

²⁸ Rosenblum, 9.

²⁹ "From the Vault: Designed of 1950s gas station special for Aspen." Aspen Times Weekly. 7 Jun 2018. Accessed online on 26 Apr 2021 at <https://www.aspentimes.com/magazines/aspen-times-weekly/from-the-vault-designed-of-1950s-gas-station-special-for-aspen/>.

³⁰ *Corpus-Christi Caller-Times*. 15 Mar 2004.

³¹ City of Manhattan Fire Department Risk Reduction. *Building and Sign Permits for 1026 Poyntz*. Provided by Ben Chmiel, City of Manhattan Community Development.

³² Riley County Registrar of Deeds. Ownership records for Lots 447-448, Ward 4.

Dawson's Conoco Service Station

Name of Property

Riley County, Kansas

County and State

gasoline pumps have formerly been removed, the canopies and support poles clearly convey the original function of a gas station. With its location opposite Manhattan's City Park (home of the famous Johnny Kaw of the same era) this station also conveys its historic association with roadside travel and attractions.

Located at Eleventh and Poyntz in Manhattan, Kansas, Dawson's Conoco Service Station is eligible for listing under Criteria A and C in the areas of Commerce and Architecture. The property is significant as a reflection of oil companies' corporate standards and practices serving the motoring public in the mid-twentieth century. The service station is one of the few remnants of a time in Manhattan when Poyntz Avenue functioned as an extension of the state highway and when Johnny Kaw (across the street) was considered a roadside attraction. This period ended after the construction of the Manhattan Town Center Mall in the late 1980s, diverting traffic around downtown to what is present day K-18. Dawson's Conoco Service Station is an excellent intact representative of the post-World War II station reflecting Conoco's 1960s Modern design that featured a full-service oblong box station with angled canopies and arc lights presenting a consistent, clean, modern image to travelers.

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

9. Major Bibliographical References

Bibliography (Cite the books, articles, and other sources used in preparing this form.)

- Ancestry.com. *U.S. City Directories, 1822-1995* [database on-line]. Provo, UT, USA: Ancestry.com Operations, Inc., 2011.
- Buck, W.V. "Kansas Highway Development and Road Legislation," *The History of Kansas State and Its People*. Chicago, IL: American Historical Society, Inc., 1928, 966-984.
- City of Manhattan Fire Department Risk Reduction. *Building and Sign Permits for 1026 Poyntz*. Provided by Ben Chmiel, City of Manhattan Community Development.
- [Conocophillips.com](https://www.conocophillips.com/about-us/our-history/1909-1875/). "Our History: 1875-1909," accessed online on 20 April 2021 at <https://www.conocophillips.com/about-us/our-history/1909-1875/>.
- "The Golden Belt – Model Highway in 1913," *Kansas DOT Hilites* 31: 5 (June-July 1970) 8-9.
- Golden Belt Road Association, *Golden Belt Road Official Log*, n.d. Available at the Kansas State Historical Society Research Library.
- Hogan, Jane. "Golden Belt Highway," *Kansas DOT Hilites* 37: 4 (May-June, 1977) 12-13.
- Jones, W. Dwayne. "A Field Guide to Gas Stations in Texas." *Historical Studies Report NO. 2003-03*. Austin, TX: Texas Department of Transportation. 2003, 2016. [updated by David W. Moore, Jr. & Shonda Mace].
- Miner, Craig. *Kansas: A History of the State, 1854-2000*. Lawrence: University Press of Kansas, 2002.
- Newspapers.com for various issues of the following newspapers:
The Manhattan Mercury & Weekly Mercury
The Morning Chronicle
Manhattan Republic
- Randl, Chad. "The Preservation and Reuse of Historic Gas Stations." *Preservation Brief* 46. Washington, DC: National Parks Service, 2008.
- Riley County Appraisers Office. Parcel record for 1026 Poyntz.
- Riley County Registrar of Deeds. Ownership records for Lots 447-448, Ward 4.
- Riley County Historical Society. 1939, 1960-1968 R.L. Polk Directories.
- Rosenblum, Thom. *Hughes Conoco Service Station National Register Nomination*. Washington, DC: National Parks Service. 2011.
- Rosin, Elizabeth. *Historic Resources of Route 66 in Kansas*. National Register of Historic Places Multiple Property Document. Washington, DC: National Parks Service. 2003.
- Rosin, Elizabeth and Dale Nimz. *Roadside Kansas*. National Register Multiple Property Documentation Form. Washington, DC: National Parks Service, 2008.
- Sanborn Fire Insurance Co. Maps for Manhattan, Riley County, Kansas. 1923, 1930, 1947.
- Sherow, James E. *Manhattan*. Charleston, SC: Arcadia. 2013.
- Spencer, Brenda R. and Christy Davis. *Downtown Manhattan Historic District Multiple Property Submission*. Washington, DC: National Parks Service, 2006.
- U.S. 40 *The Main Street of America* Highway Brochure, no publisher or date. Accessed online 28 Apr 2021 at <http://www.kansasmemory.org/item/1624>

Previous documentation on file (NPS):

- ☐ preliminary determination of individual listing (36 CFR 67 has been requested)
- ☐ previously listed in the National Register
- ☐ previously determined eligible by the National Register
- ☐ designated a National Historic Landmark
- ☐ recorded by Historic American Buildings Survey # _____
- ☐ recorded by Historic American Engineering Record # _____
- ☐ recorded by Historic American Landscape Survey # _____

Primary location of additional data:

- ☒ State Historic Preservation Office
- ☐ Other State agency
- ☐ Federal agency
- ☐ Local government
- ☐ University
- ☐ Other
- Name of repository: _____

Historic Resources Survey Number (if assigned): _____

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

10. Geographical Data

Acreage of Property .34 acres

Latitude/Longitude Coordinates

Datum if other than WGS84:

(enter coordinates to 6 decimal places)

1 39.179809 -96.573006
Latitude: Longitude:

Verbal Boundary Description (describe the boundaries of the property)

Ward 4, Lots 447 & 448, City of Manhattan, Riley County, Kansas

Boundary Justification (explain why the boundaries were selected)

The description above reflects the legal parcel on which the building was constructed in 1967 and is located.

11. Form Prepared By

name/title Brenda and Michelle Spencer

organization Spencer Preservation

date 5/1/2021

street & number 10150 Onaga Road

telephone 785-456-9857

city or town Wamego

state KS

zip code 66547

e-mail brenda@spencerpreservation.com

Property Owner: (complete this item at the request of the SHPO or FPO)

name Phyllis Pease

street & number 1905 Leavenworth

telephone 785-200-7838

city or town Manhattan

state KS

zip code 66502

Paperwork Reduction Act Statement: This information is being collected for applications to the National Register of Historic Places to nominate properties for listing or determine eligibility for listing, to list properties, and to amend existing listings. Response to this request is required to obtain a benefit in accordance with the National Historic Preservation Act, as amended (16 U.S.C.460 et seq.).

Estimated Burden Statement: Public reporting burden for this form is estimated to average 100 hours per response including time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding this burden estimate or any aspect of this form to the Office of Planning and Performance Management, U.S. Dept. of the Interior, 1849 C. Street, NW, Washington, DC.

Dawson's Conoco Service Station

Name of Property

Riley County, Kansas

County and State

Additional Documentation

Submit the following items with the completed form:

Photographs

Submit clear and descriptive photographs. The size of each digital image must be 1600x1200 pixels (minimum), at 300 ppi (pixels per inch) or larger. Key all photographs to a sketch map or aerial map. Each photograph must be numbered and that number must correspond to the photograph number on the photo log. For simplicity, the name of the photographer, photo date, etc. may be listed once on the photograph log and doesn't need to be labeled on every photograph.

Photograph Log

Name of Property: **Conoco Gas & Service Station**

City or Vicinity: **Manhattan**

County: **Riley** State: **Kansas**

Photographer: **Brenda Spencer**

Date

Photographed: **19 April 2021**

Description of Photograph(s) and number, include description of view indicating direction of camera:


#	Direction	Description
1 of 14:	NE	View of station from the SE corner of Poyntz Avenue and 11 th Street
2 of 14:	NW	East and south/front facades with canopy and arc light in foreground from SE corner of site on Poyntz Avenue
3 of 14:	NW	Detail of south and east facades from beneath canopy
4 of 14:	SW	East and north secondary facades from NE corner of site at rear alley
5 of 14:	SE	North and west facades from NW corner of site at 11 th Street
6 of 14:	E	West facade from City Park opposite station on west side of 11 th Street
7 of 14:	NE	West and north street facades from SE corner of site (11 th and Poyntz)
8 of 14:	NE	Detail of west "storefront" from SW corner of building
9 of 14:	SE	Interior view of south storefront in "sales room" looking SE from west storefront entry
10 of 14:	W	Interior view of west storefront looking W along south storefront from SE corner
11 of 14:	NE	Looking NE in salesroom toward garage on left (N) and backside of storage room on right (E)
12 of 14:	NE	Garage, looking NE from entrance from sales room at SW corner
13 of 14:	SW	Garage, looking SW from north end of garage
14 of 14:	SW	Detail of extant original driveway signal bell

Photo key on following page


Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

Photo Key

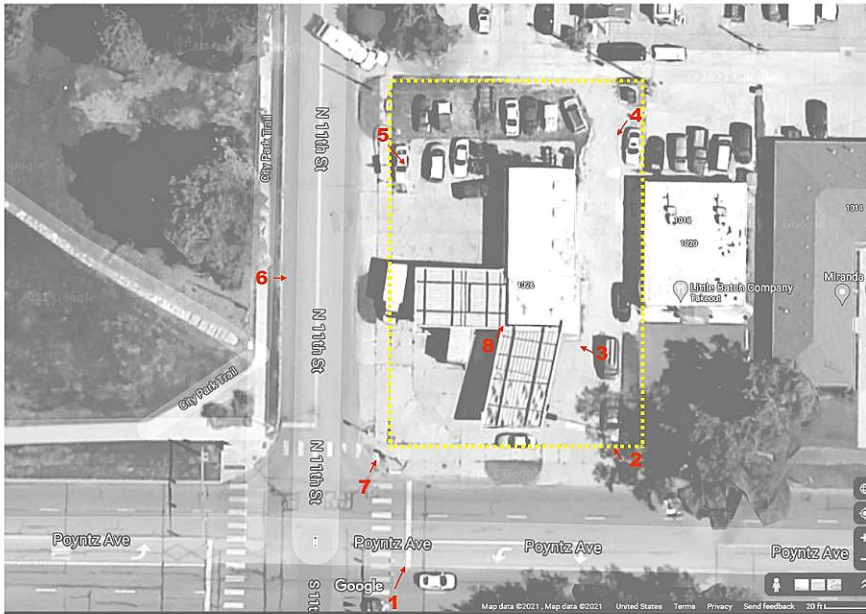

Conoco Gas & Service Station
1026 Poyntz Avenue, Manhattan, KS
PHOTO KEY—EXTERIOR/SITE
2021 Google Maps used as baseplan

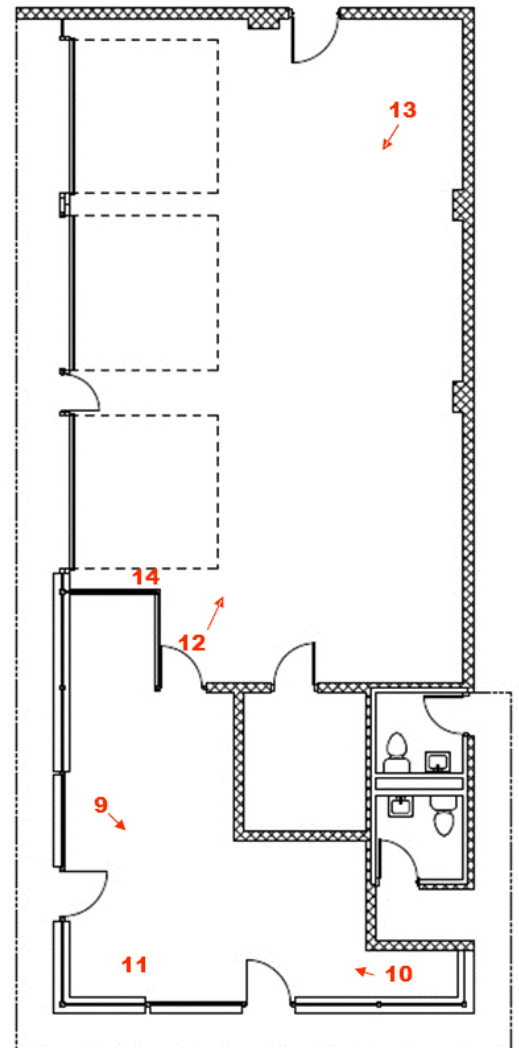

Conoco Gas & Service Station
1026 Poyntz Avenue, Manhattan, KS
PHOTO KEY—INTERIOR
Plan by BBN Architects



Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

Figures

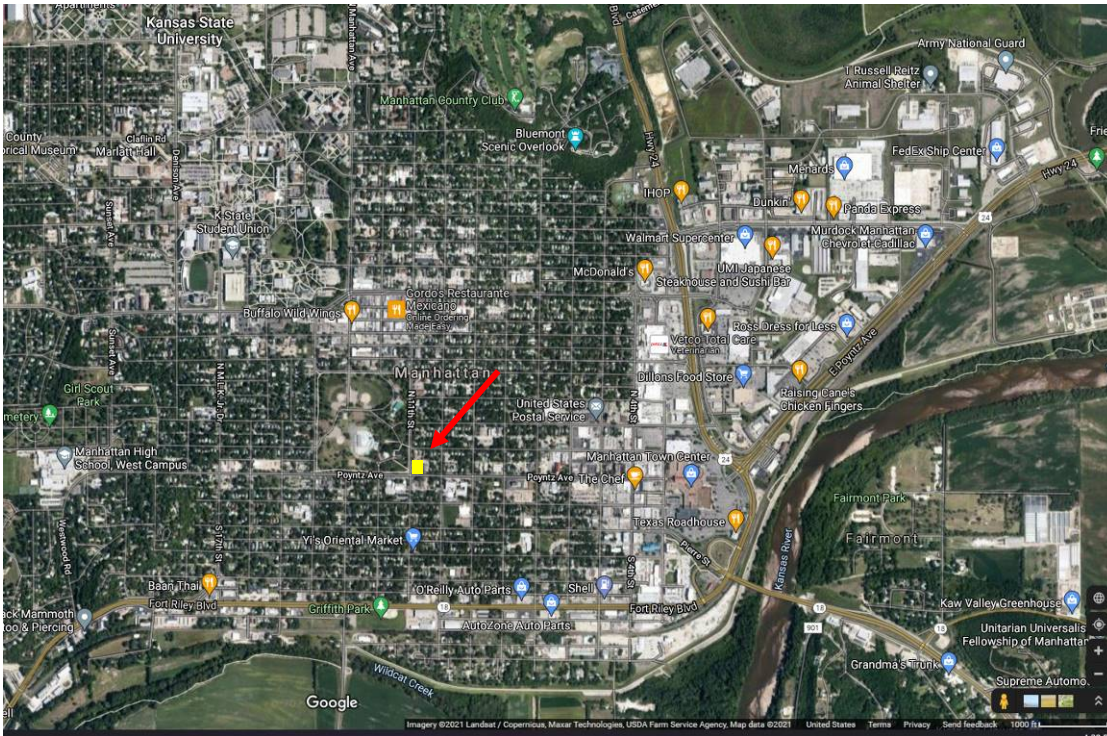


Figure 1 – Context Map and Site Plan (Google Maps 4-23-2021)

Conoco Gas and Service Station

1026 Poyntz Avenue, Manhattan, Riley County, KS

WGS 84, Latitude: 39.179809, Longitude: -96.573006

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

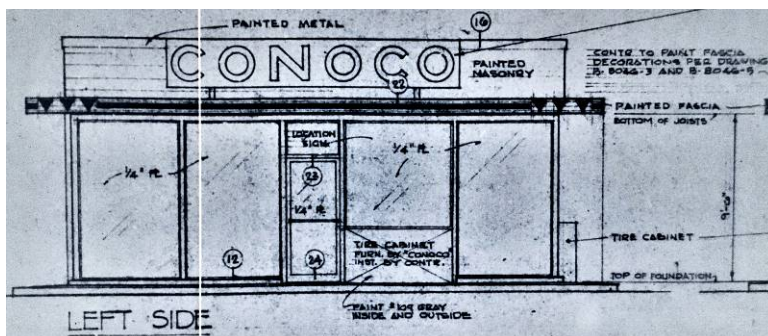
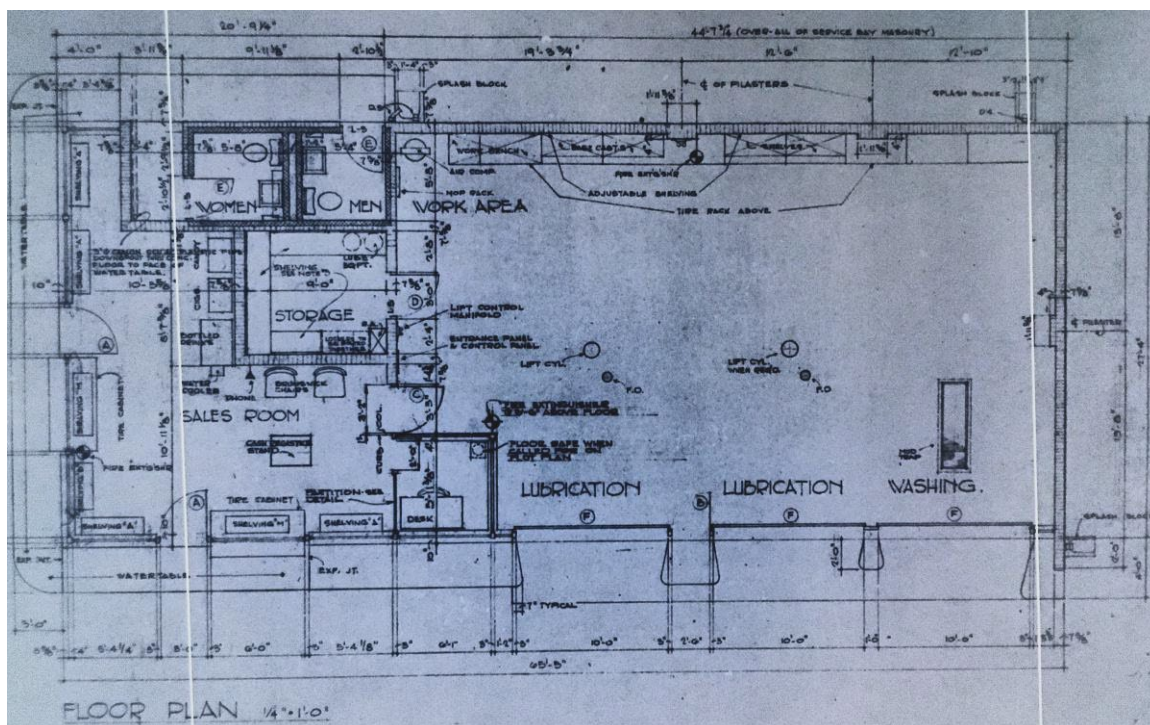
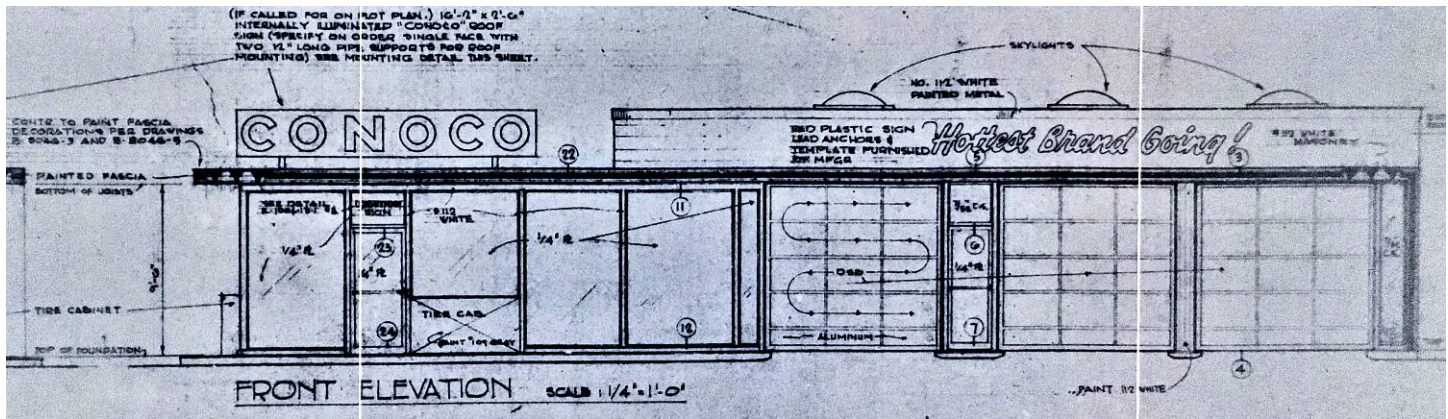


Figure 2a-Original Plans by Continental Oil Company, Marketing Department, Houston Texas
Service Station Building, Type 09A- MAS, Approved by Fred MacLean, 10-14-1963.
Note: Dawson's Conoco Service Station is a mirror image of this standard plan with service bays on the NW – see Figure 3 for reverse images.

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State






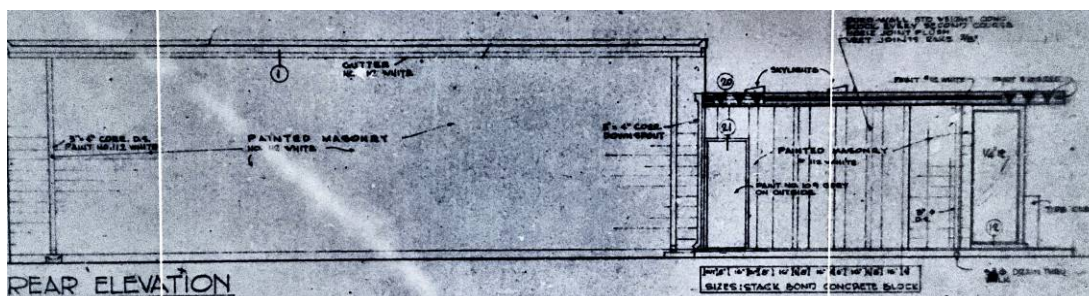


Figure 2b-Original Plans by Continental Oil Company, Marketing Department, Houston Texas
Service Station Building, Type 09A- MAS, Approved by Fred MacLean, 10-14-1963 with details and updates through 1966

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

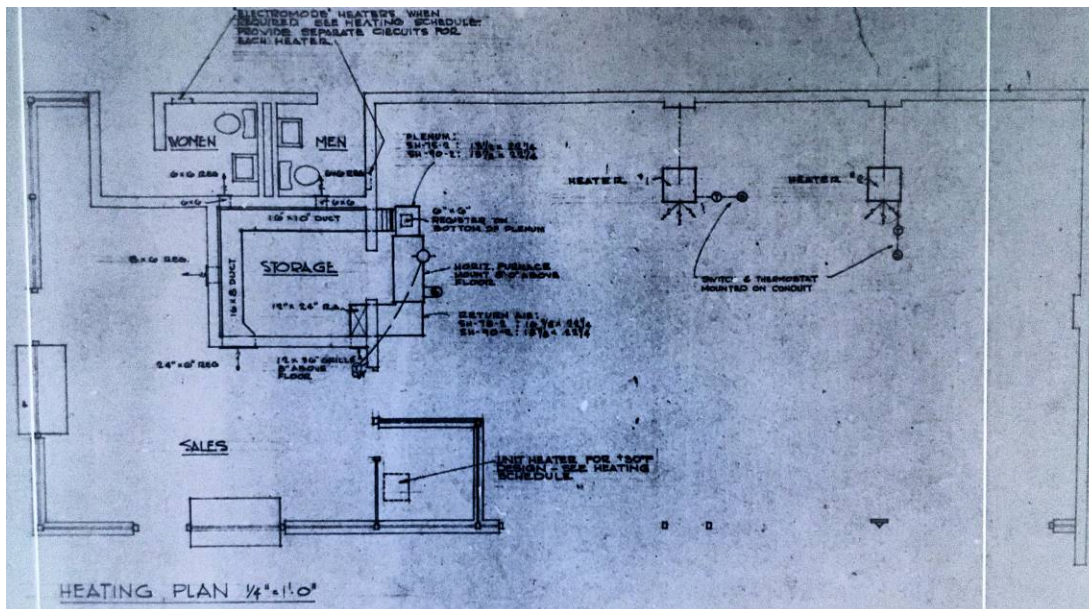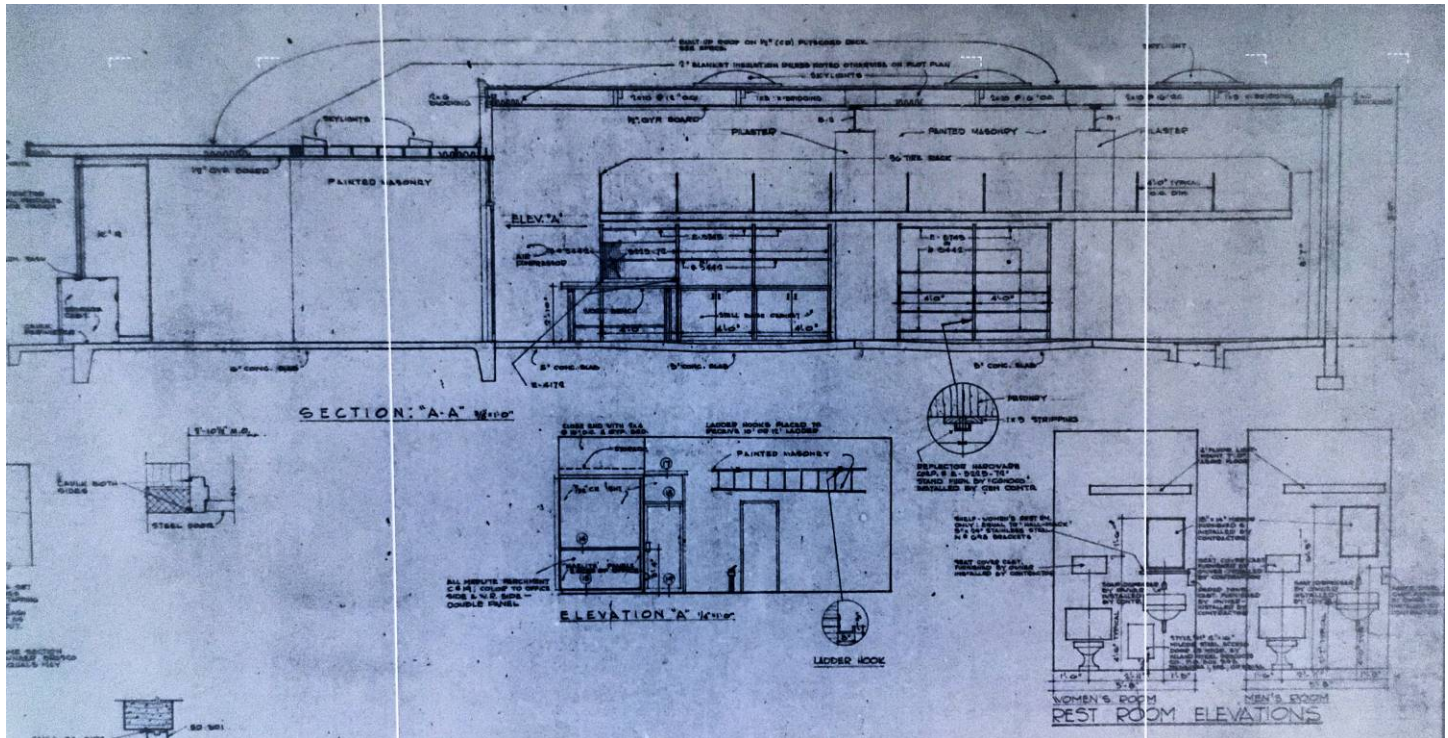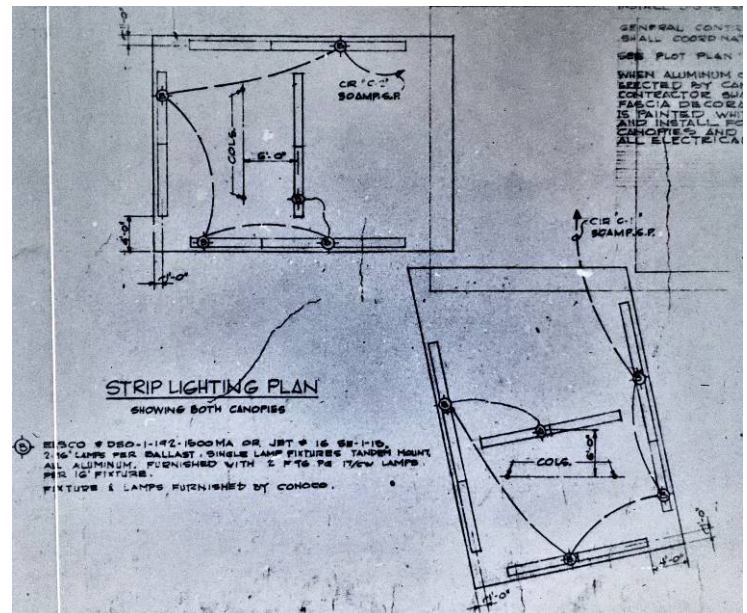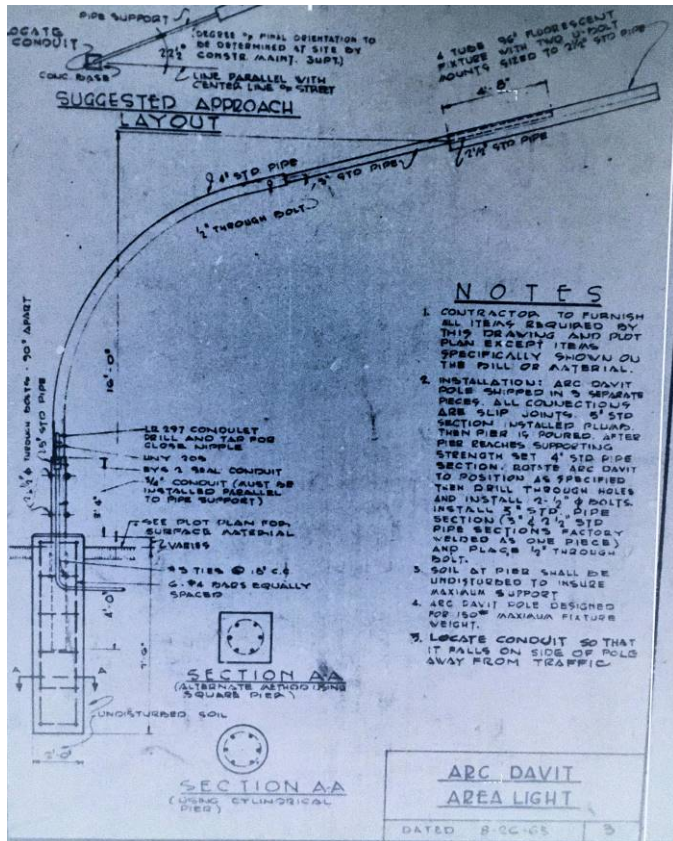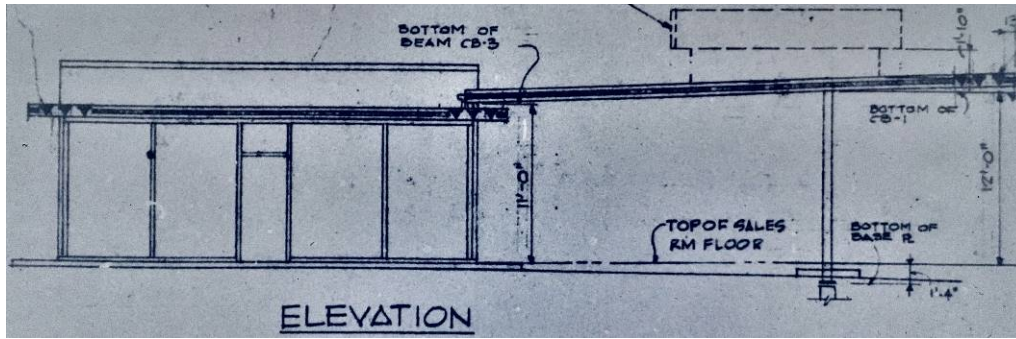

5	10-11-65	REVISOR OFFICE COVE; STORE ROOM SHELVES	GLADYS
4	8-3-65	MULLS WHITE	GLADYS
3	11-10-64	CHANGED INTERIOR COLORE; REVISED STORE ROOM SHELVING	GLADYS
2	7-17-64	REV PAINTING, DOOR CLOSED, BILL OF MATE	GLADYS
1	10-9-63	FINAL	GLADYS
CONTINENTAL OIL COMPANY MARKETING DEPARTMENT HOUSTON TEXAS SERVICE STATION BUILDING TYPE 09A-MAS FLOOR PLAN			
APPROVED: J. A. P. 11/10/65 DATE: 10-14-63 No. B-8041-2			

Figure 2c-Original Plans by Continental Oil Company, Marketing Department, Houston Texas Service Station Building, Type 09A- MAS, Approved by Fred MacLean, 10-14-1963 with details and updates through 1966

(Source: Building and Sign Permits for 1026 Poyntz. City of Manhattan Fire Department Risk Reduction, provided by Ben Chmiel, City of Manhattan Community Development). Images were captured off microfiche film and are the best available.

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State

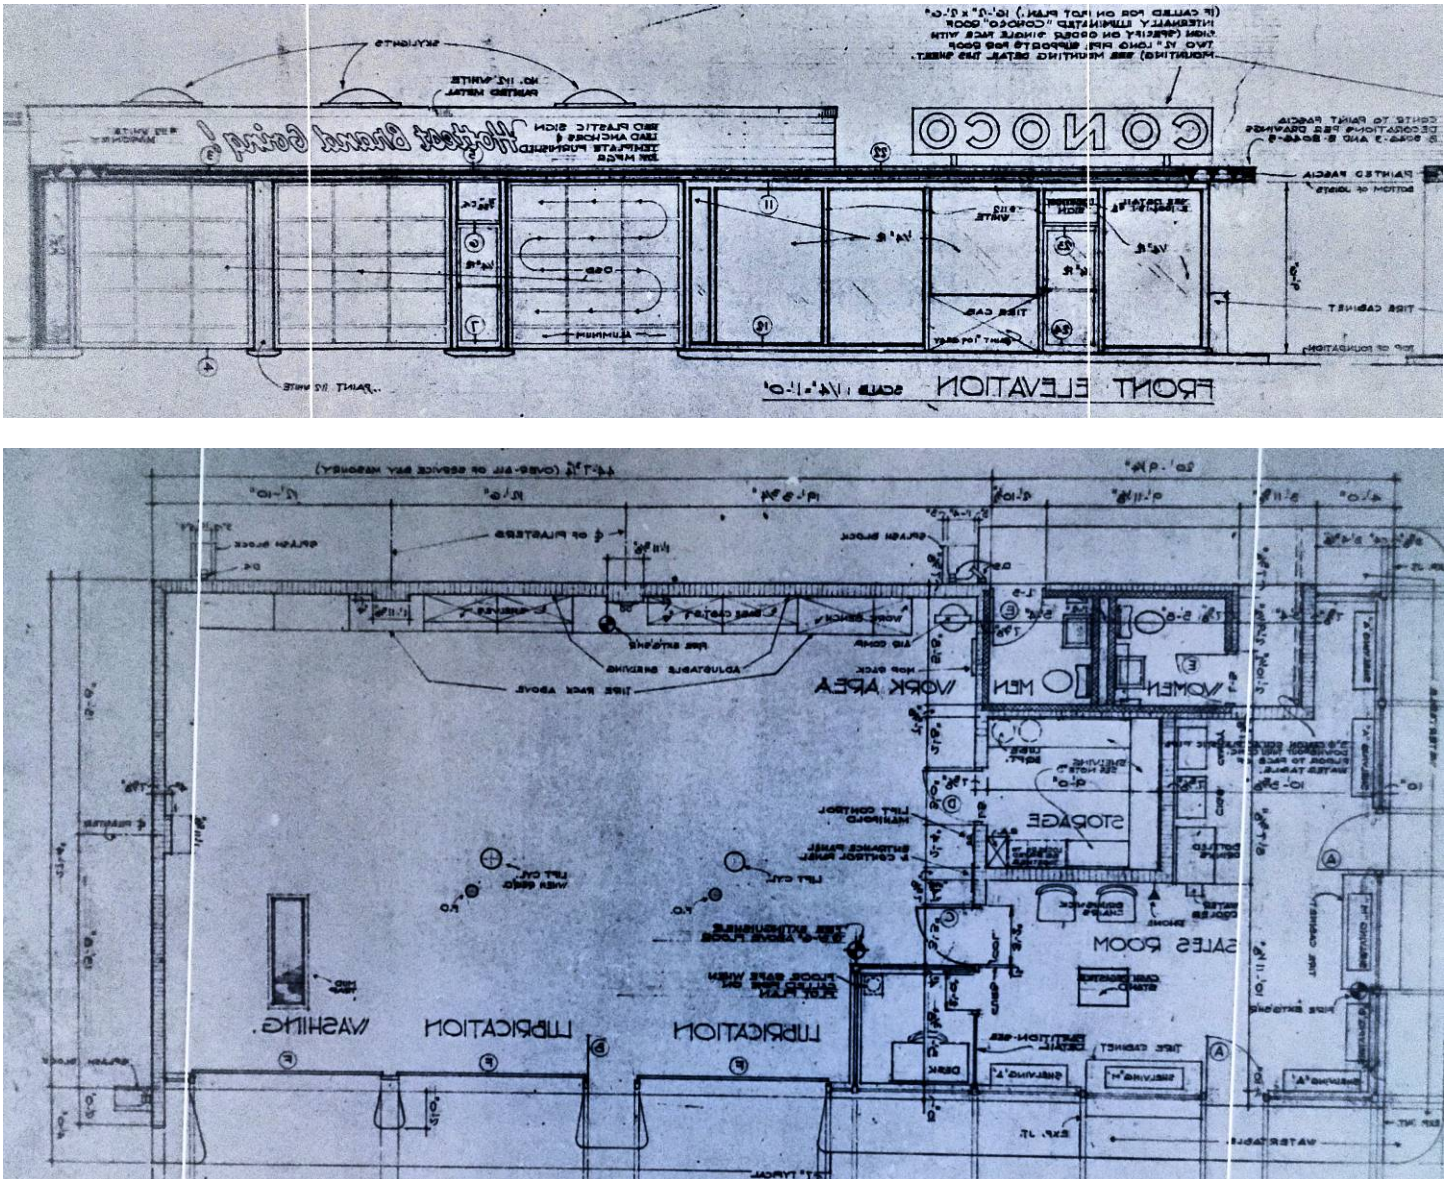


Figure 3 Reverse Image of Original Plans by Continental Oil Company, Marketing Department, Houston Texas (original plans and source noted above on Figure 2) West (Eleventh Street) Elevation and Plan of Dawson's Conoco Service Station

Other Attachments

The specifications that accompanied the original drawings are available as an addendum to the nomination in a separate .pdf file.

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 1



Photo 2

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 3



Photo 4

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 5



Photo 6

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 7



Photo 8

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 9



Photo 10

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 11



Photo 12

Dawson's Conoco Service Station
Name of Property

Riley County, Kansas
County and State



Photo 13



Photo 14

Minutes
HISTORIC RESOURCES BOARD
City Commission Room, City Hall
1101 Poyntz Avenue
Monday, December 16, 2019
4:00 p.m.

Members Present: Kevin West, Chair; Eileen Meyer, Vice-chair; Ann Kosch; and Tom Hanson.

Members Absent: Renee Erickson, Jana Fallin, Cameron Tross

Staff Present: Ben Chmiel, Planner; John Adam, Senior Planner; Dre'Vel Taylor, Planning intern; Ryan Courtright, Assistant Chief of Risk Reduction

Public Present: Aaron Dyck & Patrick Schaub, BBN Architects; Linda Glasgow;

1. Meeting Opening

West called the meeting to order at 4:00 p.m. Staff performed roll and confirmed a quorum. West read the public comment policy and opened the floor to public comments. There were none.

West suggested a motion to approve the minutes. Kosch said her comments on the two garage solution were omitted from the previous meetings minutes. Chmiel said he would modify the minutes to reflect that discussion. Kosch asked if the final version of the letter sent to the City Commission could be emailed to the Historical Resources Board as well, Chmiel said he would.

Kosch moved to approve the November 18, 2019 minutes with corrections. Hanson seconded. Motion carried 4-0-0.

2. Work Session

Conoco Service Station Pre-Application Review. Dyck presented preliminary plans for a rehabilitation of the old Conoco Service Station at 1026 Poyntz. The station and the building at 1018 Poyntz would be repurposed into a bakery and restaurant/produce market. Though the property was not yet listed on any historic register, the potential applicant was soliciting feedback for the proposal once it was listed and the project commenced.

West opened the floor for public comments. Linda Glasgow, 2236 Snowbird Drive, asked if the light posts met Dark Sky standards. The applicant clarified that no lights projected upward.

Kosch said her personal feelings about the project were mixed. Though she was glad to see the property being preserved, it was sad to see the use changed. Kosch was concerned that the current business may not know about the proposed changes to the property. She also asked if the alley behind the business was paved. Chmiel and West confirmed that the alley was paved.

Meyer said the redevelopment was attractive and would be great for families visiting City Park. She also appreciated that it was a local business selling locally produced items. She believed that the business owner owning the property would give them more stability.

Chmiel acknowledged Kosch' comments on the change of use, explaining how the zoning of this area changed around 1996 and that the gas station ceased operation around 2006. He noted that the Poyntz

corridor is almost exclusively zoned for professional office and service, and as such, a gas station could not be reestablished.

West asked if the existing garage doors would stay on the building after renovation. Dyck said that one garage door would stay, the other two would be replaced with windows that kept the appearance of a garage door. West asked city staff if they would generally support the proposal. Chmiel said at first glance, the proposal appears to meet the Secretary of Interiors Standards. West said that changing the use and renovating the building will probably be the only way to keep the existing building. Kosch asked if there are any clean-up issues relating to the previous use as a gas station.

Dyck said any issues were remediated the underground fuel tanks were removed years ago. She asked if there is safe passage to cross the street from City Park to the restaurant. Dyck confirmed there is an established crosswalk at the intersection.

Permitting Processes. Courtright presented on the building permit process to the Board, focusing on which projects do or do not require a building permit, triggering a historic review.

Kosch appreciated Courtright's presentation, noting the Board is often faced with situations where they lack information on the permitting process and feel more empowered with the additional knowledge. Kosch asked about the process of site inspections. Courtright said site inspections are typically conducted prior to things behind wall being covered up. Risk Reduction aims to inspect the site in the earlier stages and again at the final stage. Kosch asked for clarification on properties that are grandfathered in and may not necessarily meet current safety or occupancy standards. Courtright explained that if there is a situation where a change is proposed that does not meet certain historical preservation standards, Risk Reduction can attempt to get it approved or help find a middle ground option, especially for ADA issues.

West asked if County and State buildings are subject to Risk Reduction's review processes. Courtright said they are not within the City jurisdiction, but these other governmental agencies typically do want some oversight and are willing to work with them.

Historical Resources Board By-Laws. Chmiel prefaced the item by explaining there would not be a vote on by-law changes since nothing had been presented, but changes to integrate the public comment policy could be voted on at a later meeting after discussion. West preferred to wait until there were more Board members present before assessing the bylaws. Kosch agreed.

3. Minor Review Updates

Chmiel presented the administrative review for structural stabilization work at 414 Poyntz Avenue (the Wareham Office Building). The applicant sought a permit to reinforce the foundation of the building by sister-joining existing basement joists. Kosch asked if the building was contributing, Chmiel said it was.

4. Updates and Announcements

Chmiel mentioned the Aggieville Historic Survey is still ongoing but had no substantial updates. He said he would probably not have anything major to present until March.

Chmiel said he is putting together a Historical Preservation annual report, noting it would be good to track data and publish activities and accomplishments of the Board and staff for better public engagement.

Chmiel affirmed the next meeting would include a discussion of CIP requests for 2021-2025 and discussion on amendments to the by-laws.

5. Adjournment

West adjourned the meeting at 5:05 p.m.

Next meeting scheduled: Monday, January 27, 2020 at 4:00 p.m.